

KA Fair

WRC Report No. 865/1/03



Water Research Commission



OPERATIONAL MODEL OF THE ORANGE RIVER

Report to the Water Research Commission

by

KA Fair

BKS (Pty) Ltd South Africa

Disclaimer

This report emanates from a project financed by the Water Research Commission (WRC) and is approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the WRC or the members of the project steering committee, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

OPERATIONAL MODEL OF THE ORANGE RIVER

EXECUTIVE SUMMARY

Introduction

The Orange River is one of South Africa's most important water resources and its catchment covers a significant portion of Southern Africa. Vanderkloof Dam, the last major storage structure on the river, is 1400km upstream of the river mouth where the furthest downstream users obtain their water.

Gariep Dam is located just upstream of Vanderkloof Dam. Gariep Dam is mainly used to support Vanderkloof Dam as there is almost no additional runoff entering the Orange River between the two dams. Upstream of Vanderkloof Dam the water in the Orange River is used to supply both the demands in the Orange River basin and to augment the supply of water to other catchments through inter-basin transfer schemes. One of these schemes is the well known Lesotho Highlands Water Project, in which water is transferred from the upper reaches of the Orange River to the Vaal River catchment in order to augment the supply of water to Gauteng, the industrial and economic centre of South Africa. Water is also transferred from Gariep Dam, on the Orange River, through the Orange-Fish tunnel to the Eastern Cape for use in the Fish and Sundays River basins.

In the catchment downstream of Vanderkloof Dam there are agricultural, industrial, urban and mining developments which obtain their water from the Orange River. In addition to these demands there are important environmental requirements along the river and at the river mouth which must also be satisfied. The catchment downstream of Vanderkloof Dam is extremely arid and the only reliable source of water in the lower reaches of the river are the releases made from Vanderkloof Dam.

Motivation for the research

As the water requirements on the Orange River catchment continue to grow, the water in the catchment is becoming ever more valuable. It is therefore becoming increasingly important to optimise the releases from Vanderkloof Dam, in order to supply the downstream demands whilst minimising any excess releases, so as to conserve the valuable resource in Vanderkloof and Gariep dams.

The major difficulty in optimising the releases from Vanderkloof Dam is that it can take several weeks for water released from the dam to reach the river mouth where the domestic,

industrial and environmental demands must be satisfied. The time taken for the releases to reach the mouth depends on the prevailing conditions in the river in relation to the amount of water released. Releases during low flow conditions may take up to 6 weeks to reach the mouth. It is evident that there can be no quick relief from any shortages that might be experienced along the lower Orange River through additional releases from Vanderkloof Dam. Due to the nature of these demands any water shortages would have a major impact, both economic and environmental.

For this reason it was decided to develop a tool which could be used to help determine the required releases from Vanderkloof Dam. A hydraulic model of the Orange River was developed to be used by the decision makers to simulate and then evaluate various proposed release scenarios.

Motivation for the development of a real time hydraulic model

There are several potential challenges in modelling the Orange River downstream of Vanderkloof Dam:

- The length of the river is 1400km.
- Due to the remote terrain through which the river flows the abstractions from the river are not recorded in real time and it is not possible to include accurate abstraction data in the river model
- · The return flows from irrigation along the river are also uncertain
- Losses from the river are also significant. Evaporation losses depend on the surface area of the water and therefore the local flow conditions.
- Inflows from tributaries are not recorded in real time.

In order to overcome these difficulties and improve the modelled results, it was decided to investigate the inclusion of real-time data in the hydraulic model. Real time conditions, either stage or flow, are recorded at several sites along the Orange River. By incorporating these data into the model at several points on the river the simulated flows would be corrected to the actual flow conditions. Not only would this improve the accuracy of the model but the difference between the modelled and recorded flows could be used to quantify the net inflow or abstractions from river reaches between the real time stations.

Objective of the research

The aim of the project was to develop a decision support tool for the operation of the Orange River downstream of Vanderkloof Dam. This tool would be based on a calibrated hydraulic model of the river. Flows from the Vaal River into the Orange River were to be included in the model. The model would be used to simulate various possible release scenarios so that

the resultant river conditions could be assessed before a decision is made regarding the release schedule.

Another aspect of the study was to investigate the possibility of linking the hydraulic model to the network of telemetry stations on the Orange River. The objective was to include the real time stage and discharge data recorded at these stations in the hydraulic model and to assess whether the forecast flow conditions on the river could be improved by including such data.

In order to satisfy the basic objective of the study the following tasks were conducted:

- Set up a hydraulic model of the Orange River downstream of Vanderkloof Dam using the ISIS hydro-dynamic model
- Calibrate the model for low flow conditions using historical data
- Modify the code of the ISIS engine so that real time recorded stage and flow data can be incorporated into the model
- Develop a graphical user interface (GUI) to facilitate the exchange of data between the real time network and the hydraulic model
- · Investigate the effect of including the real time data on the simulated flows
- Test the effectiveness of the decision support system

Background to the study

Various detailed studies have been made of the Orange River:

- The Orange River System Analysis (ORSA) was completed in 1990. An important conclusion of the study was that the existing water demands downstream of Vanderkloof Dam would not be met if the proposed 5 phases of the Lesotho Highlands Water Project were to be fully developed. The study highlighted the importance of evaporation losses from the river as well as the difficulty of releasing the correct amount of water from Vanderkloof Dam to supply the demands downstream of the dam without allowing too much water, over and above the environmental requirements, to spill into the Atlantic Ocean
- In the Orange River Replanning Study (ORRS) a framework was established for the future development of the river and the utilisation of its water.
- The problem of determining the losses from the Orange River were addressed in the Orange River Losses Study Phase 1. The aim of this study was to determine the losses from the Orange River downstream of Vanderkloof Dam.
- The purpose of the River Losses Study Phase 2 (RL2) was to investigate the processes driving evaporation losses from rivers in order to refine previous estimates of losses from the Orange River between Vanderkloof Dam and the river mouth and

also to determine a general methodology for estimating losses from other South African rivers. In order to verify the methodology proposed in the RL2 study a hydraulic model of the lower reaches of the Orange River, between Blouputs and Brandkaros, was prepared. In order to accurately model the evaporation from the river, which is dependent on the surface area of the river and therefore also on the flow, an evaporation module was developed for the hydraulic modelling package.

 During the course of this study it became clear that a hydraulic model of the Orange River would be a useful decision support tool for the operation of the river and the determination of the releases from Vanderkloof Dam. The development of such a tool was a logical continuation of the model established for the RL2 study.

Technological Developments

In order to successfully model the Orange River several major and innovative developments were made to the ISIS software:

- The real time hydraulic unit. This development is a novelty in river modelling and was developed and tested as part of this project. This unit forces the simulated values in the model to match the actual stage and flow conditions recorded at several points on the river, thereby improving the accuracy of the model.
- An adaptive timestepping routine. This routine allows a relatively long timestep to be
 used for the simulation. If instabilities occur the timestep is reduced until a solution is
 found, or the minimum timestep is reached. The longer timestep results in shorter
 computational times. This unit is now available in the commercial releases of ISIS.
- A decision support tool was developed which will be used by the operators of Vanderkloof Dam to help determine the required releases from the dam in terms of quantity and timing. The tool will be used by the operators to simulate proposed release scenarios on a what if basis, given the current river conditions and expected downstream water requirements. The system would be made up of three components: A real time model of the Orange River, which will continuously update the simulations of the river using the real time data recorded on the river, so that a best estimate of actual flow and stage will be available at every computational node of the model. Once the real time model has been updated with the most recent data, the second component, the forecast model, is intended to simulate the scheduled releases from Vanderkloof Dam, giving a best estimate of future conditions on the river. The third component is to be used to simulate any proposed release scenarios, so that it can be determined whether they meet the required downstream flow requirements.

 A Graphical User Interface. This development was made to facilitate the exchange of data from the bank of real time recorded data, which are available from the South African Department of Water Affairs and Forestry, and the hydraulic model.

Conclusions and Recommendations

The strategy determined in this study will provide a rational basis for the operators of Vanderkloof Dam to determine a discharge release pattern to ensure that the various demands downstream of Vanderkloof Dam are satisfied. As the model is based on sound hydraulic principles rather than simplified routing methods the users can be confident in the simulated results, provided that the real time data are accurate and available. The use of real time data further improves the simulation because unmodelled events such as localised inflows can be taken into account.

One shortcoming of the project is that although the methodology has been developed and tested on historical data it has not been possible, to date, to test the process sufficiently on real time data. This is due to the lack of available accurate real time data. The following recommendations can therefore be made:

- The acquisition of real time data from the Orange River should be improved. The real time telemetry network must be well maintained so that accurate and up to date information is available.
- It is recommended that the real time data are made available on an FTP site, so that the
 data do not have to be e-mailed to interested parties. Alternatively the full set of
 information should be made available on the website. At present only the average
 readings for every hour are included.
- It is also strongly recommended that the releases from Vanderkloof Dam are made available in real time. This will require co-operation between Eskom and the Department of Water Affairs and Forestry.
- During the simulation procedure it was concluded that the data at Zeekoebaart were inaccurate. It is recommended that this inaccuracy be investigated further and corrected.

Future Extensions to the Project

Various possible extensions to the project have been identified. They have not been investigated as part of this study but would be logical and useful developments:

 An automatic calibration routine could be developed as an extension to the real time hydraulic model. This routine would compare the actual conditions recorded on the river to the flows simulated by the model and automatically adjust the model parameters to improve the calibration of the model. This might be beneficially combined with a Kalman filter.

- Extending the cross sectional data in the model to include detail for high flows so that
 the model could be used as a flood management tool.
- Water quality modelling could also be included in the simulations
- Modelling of the instream flow requirements of the river is a natural extension of the modelling process.

Acknowledgements

The project team would like to thank the following people and institutions:

- The Water Research Commission of South Africa for funding the project
- · The Steering Committee for their input
- Prof G Pegram of the University of Natal for his guidance and support.
- Halcrows for allowing the necessary changes to the ISIS code
- Dr C Whitlow for coding the changes to ISIS flow
- Dr R McKenzie for his ideas, input and photographs

OPERATIONAL MODEL OF THE ORANGE RIVER

TABLE OF CONTENTS

Page

1	INTE	RODUCTION	1-1			
	1.1	MOTIVATION FOR THE STUDY	1-1			
	1.2	MOTIVATION FOR THE DEVELOPMENT OF A REAL TIME HYD				
	1.3	OBJECTIVES OF THE STUDY	1-5			
	1.4	TECHNOLOGICAL DEVELOPMENTS	1-6			
	1.5	BACKGROUND TO THE RESEARCH	1-7			
	1.6	LAYOUT OF THE REPORT	1-8			
2	BAS	SIC CONCEPTS OF THE DECISION SUPPORT SYSTEM	2-1			
	2.1	REAL TIME HYDRAULIC MODELLING	2-4			
	2.2	DETERMINATION OF THE RELEASE SCHEDULE	2-7			
	2.3	SUMMARY	2-9			
3	GRAPHICAL USER INTERFACE3-1					
	3.1	DESCRIPTION OF THE FILE STRUCTURE	3-2			
		3.1.1 The ISIS Data File (*.DAT)	3-2			
		3.1.2 The Remote Data File (*.RTM)	3-3			
		3.1.3 The Policy Files (*.POL)	3-3			
		3.1.4 The result files (*.ZZS, *.ZZN, *.ZZL, *.ZZR, *ZZD)	3-3			
		3.1.5 Calibration File (*.CAL).	3-4			
		3.1.6 The log file (*.LOG)	3-4			
	3.2	THE PROCESSES OF THE DECISION SUPPORT SYSTEM	3-4			
		3.2.1 Real Time Simulation	3-6			
		3.2.2 Forecast simulations	3-7			
	3.3	SCREENSHOTS OF THE GRAPHICAL USER INTERFACE	3-8			
		3.3.1 The real time simulation	3-12			
		3.3.2 The forecast simulation	3-16			

		3.3.3 The Utilities	-17
	3.4	SUMMARY	3-19
4	HYD	RAULIC MODELLING DEVELOPMENTS	4-1
	4.1	THE REAL TIME UNIT	4-1
		4.1.1 The Flow-Time Real Time Control (QTBREAL)	4-2
		4.1.2 The Flow-Stage Real Time Control (QHREAL)	4-2
		4.1.3 Potential Future Developments to the Real Time Control	4-5
	4.2	ADAPTIVE TIMESTEPPING	4-6
	4.3	SUMMARY	4-7
5	THE	REAL TIME TELEMETRY NETWORK	5-1
	5.1	SUMMARY	5-6
6	THE	HYDRAULIC MODEL	6-1
	6.1	PREPARATION OF THE HYDRAULIC MODEL	6-1
		6.1.1 Cross sectional data	
		6.1.2 Channel roughness	
		6.1.3 Real Time Units	
		6.1.4 Summary of the physical nature of the Orange River downstrea	am
		of Vanderkloof Dam	6-3
		6.1.5 Abstractions from the river	6-7
		6.1.6 River Losses	6-7
		6.1.7 Calibration of the model	6-8
	6.2	SUMMARY6	-15
7	4661	ESSMENT OF THE DECISION SUPPORT TOOL	7.1
<u>,</u>			
	7.1	THE EFFECT OF THE REAL TIME MODEL ON THE FORECA	
	7.2	ESTIMATE OF SAVINGS IN WATER DUE TO THE DECISION SUPPO	
		TOOL	7-3
	7.3	SUMMARY	7-4
8	CON	CLUSIONS AND RECOMMENDATIONS	8-1
9	REFE	ERENCES	9-1

A	THE	THEORETICAL BACKGROUNDA-1			
	A.1	REYNOLDS TRANSPORT THEOREM	A-1		
	A.2	THE ST VENANT EQUATIONS	A-4		
	A.3	SUMMARY	A-9		
В	HYDRAULIC MODELS				
	B.1	LUMPED FLOW ROUTING	B-1		
		B.1.1 Level Pool Routing	B-1		
		B.1.2 The Muskingum Method	B-2		
		B.1.3 The linear reservoir model	B-2		
	B.2	DISTRIBUTED FLOW ROUTING	B-4		
		B.2.1 The kinematic wave model	B-6		
		B.2.2 The Diffusion Wave model	B-7		
		B.2.3 The dynamic flow model	B-7		
	B.3	SELECTION OF A MODEL FOR THE ORANGE RIVER	B-7		
		B.3.1 Lumped Flow Routing Models	B-8		
		B.3.2 Kinematic Wave Model	B-9		
	B.4	SUMMARY	B-11		
С	SOLUTION OF THE ST VENANT'S EQUATIONS				
	C.1	FINITE DIFFERENCE SCHEMES			
		C.1.1 Solution of finite difference schemes	C-2		
		C.1.2 The Explicit Scheme	C-3		
		C.1.3 The implicit scheme	C-4		
	C.2	SOLVING THE ST VENANT EQUATIONS			
		C.2.1 Boundary Conditions	C-9		
		C.2.2 Initial Conditions	C-10		
		C.2.3 The Newton-Raphson Method as a solution to the St Ve	enant's		
		equations	C-11		
	C.3	SUMMARY			

1 INTRODUCTION

1.1 MOTIVATION FOR THE STUDY

The Orange River is one of South Africa's most important water resources. It originates in the Maluti Mountains in Lesotho and flows 2300km westward across South Africa to the Atlantic Ocean (Figure 1.1).



Figure 1.1: Location of the Orange River

As can be seen from Figure 1.1, the Orange River catchment covers a significant portion of Southern Africa. A logical division of this catchment (for the purpose of this study) occurs at Vanderkloof Dam as it is the last major storage structure on the river.

In the catchment downstream of Vanderkloof Dam there are agricultural, industrial, urban and mining developments which obtain their water from the Orange River. There are also important environmental requirements along the river and at the river mouth which must be satisfied. In fact, as it is of major importance to several migratory bird species, the Orange River Delta has recently been declared a RAMSAR site, which means it is an internationally acclaimed environmental site.

The catchment downstream of Vanderkloof Dam is extremely arid. The gross annual average evaporation of 2850mm far exceeds the annual average rainfall of 150mm with the result that the runoff from the catchment is sporadic and rarely significant (McKenzie and Craig, 1998). The only reliable source of water in the lower reaches of the river are the releases made from Vanderkloof Dam.

The Vaal River is a major tributary to the Orange with the confluence being downstream of Vanderkloof Dam. Gauteng, the industrial and economic centre of South Africa, is supplied with water from the Vaal River catchment. The resources of the Vaal River catchment are insufficient to meet the demands in Gauteng and its supply is augmented through several inter-basin transfer schemes. One of these schemes is the well known, and recently implemented, Lesotho Highlands Water Project which transfers water from the upper reaches of the Orange River to the Vaal River catchment. Therefore, instead of the Vaal River contributing to the flow in the Orange River, the natural flow in the Orange River is in fact reduced due to the transfers from the upper Orange River to the Vaal River through the Lesotho Highlands Water Project. As a result the Vaal River is not operated to contribute to the flow in the Orange River.

Upstream of Vanderkloof Dam the water in the Orange River is used to supply the demands in the Orange River basin as well as to augment the supply to other catchments through inter-basin transfer schemes. In addition to the Lesotho Highlands Water Project, water is transferred from Gariep Dam through the Orange-Fish tunnel to the Eastern Cape for use in the Fish and Sundays River basins.

As demands for water in the industrialised Gauteng continue to increase, further transfers from the Orange River catchment upstream of Vanderkloof Dam have been planned to meet this need. These transfers will result in a decrease in the amount of water available for releases from Vanderkloof Dam. Because of these transfers from the Orange River, Vanderkloof Dam seldom spills and there are almost no inflows from the Vaal River under normal hydrological conditions. The developments in the lower reaches of the Orange River are therefore mainly dependent on the releases made from Vanderkloof Dam. However, it is evident that any releases from Vanderkloof Dam, in excess of those required by the downstream users and the environment, would result in a waste of an important resource.

It is therefore becoming increasingly important to optimise the releases from Vanderkloof Dam in order to supply the downstream demands whilst minimising any excess releases, so as to conserve the valuable resource in the Vanderkloof and Gariep Dams.

Releases from Vanderkloof Dam are also required for hydro-power generation by Eskom, the South African electricity supply utility. In the past, when the inter-basin transfers from the Orange River upstream of Vanderkloof Dam were smaller, the releases made for hydro-power generation at Vanderkloof Dam were in excess of the demands downstream of the dam. The situation is further complicated in that the releases are generally used for hydro-power generation during peak loads on the electricity network, particularly in the winter months, when the downstream irrigation demands are low. In contrast, when the irrigation demands from the river are high during the summer months, the hydro-power generation is lower due to lower electricity demands.

The major difficulty in optimising the releases from Vanderkloof Dam is that it can take several weeks for water released from the dam to reach the river mouth where the domestic, industrial and environmental demands must be satisfied. The time taken for the releases to reach the mouth depends on the prevailing conditions in the river in relation to the amount of water released. At low summer flows the releases of $100 \, \mathrm{m}^3/\mathrm{s}$ from Vanderkloof Dam take approximately 4 weeks to reach the river mouth. In winter when both the demands and evaporation are lower, the releases of approximately $40 \, \mathrm{m}^3/\mathrm{s}$ take over 6 weeks to travel the length of the river.

It is evident that there can be no quick relief from any shortages that might be experienced along the lower Orange River through additional releases from Vanderkloof Dam. Due to the nature of these demands any water shortages would have a major impact, both economic and environmental.

The primary purpose of this study was to develop a tool which could be used to help determine the required releases from Vanderkloof Dam. The aim was to develop a hydraulic model of the Orange River downstream of Vanderkloof Dam which could be used by the decision makers to simulate and then evaluate various proposed release scenarios from Vanderkloof Dam.

1.2 MOTIVATION FOR THE DEVELOPMENT OF A REAL TIME HYDRAULIC MODEL

There are several potential difficulties in modelling a river 1400km long. Firstly, due to the remote terrain through which the river flows the abstractions from the river are not recorded in real time and it is not possible to include accurate abstraction data in the river model. Irrigation abstractions in particular are difficult to model. Although there is a maximum annual quota which may be pumped from the river, it is not necessarily always used. The day to day abstractions differ from the annual quota because of variations in the requirements of the crops due to variations in seasonal and daily climatic conditions.

Secondly, the return flows from irrigation along the river are also uncertain. Although several studies have been conducted which have improved these estimates (McKenzie and Roth, 1994; McKenzie and Craig, 1997b), there are still uncertainties with regard to both the quantity and timing of these flows. It is particularly difficult to model the return flows accurately when the amount of water being used for irrigation, from which the return flows are generated, is also not certain.

Thirdly losses from the river are also significant. Evaporation losses depend not only on the current weather conditions (which are more often than not extremely hot and dry) but also on the surface area of the water and therefore the local flow conditions. Inflows from tributaries are also not recorded in real time.

Another anomaly is that although the Vaal River is usually not operated to contribute to the flow in the Orange River during low flow conditions, it has recently been observed that inflow from the Vaal River does occur, particularly at the start of the winter period. These spills are thought to originate from return flows from irrigation along the Vaal River and could be used to reduce releases from Vanderkloof Dam if they can be quantified and included in the model.

In order to overcome these difficulties and improve the modelled results, it was decided to investigate the inclusion of real-time data in the hydraulic model. Real time conditions, either stage or flow, are recorded at several sites along the Orange River as part of the HYCOS system (Chapter 5). It was hoped that by incorporating these data into the model at several points on the river the simulated flows would be corrected to the actual flow conditions. Not only would this improve the accuracy of the model but the difference between the modelled and recorded flows could be used

to quantify the net inflow or abstractions from river reaches between the real time stations.

1.3 OBJECTIVES OF THE STUDY

The main objective of the project was to develop a decision support tool for the operation of the Orange River downstream of Vanderkloof Dam. This tool would be based on a calibrated hydraulic model of the river. Flows from the Vaal River into the Orange River were to be included in the model. The model would be used to simulate various possible release scenarios so that the resultant river conditions could be assessed before a decision is made regarding the release schedule.

Another aspect of the study was to investigate linking the hydraulic model to the network of telemetry stations on the Orange River. The objective was to include the real time stage and discharge data recorded at these stations in the hydraulic model and to assess whether the forecast flow conditions on the river could be improved by including such data. This idea is new to river modelling in South Africa and the hydraulic modelling package had to be modified before the real time data could be simulated. It was also necessary to develop a graphical user interface to facilitate the exchange of data between the real time telemetry network and the hydraulic model.

In order to satisfy the main objective of the study the following tasks were conducted.

- Set up a hydraulic model of the Orange River downstream of Vanderkloof Dam using the ISIS hydro-dynamic model. This involved obtaining information describing the 1300km of the river.
- Calibrate the model for low flow conditions using historical data. It was found that
 the calibration process was complicated by the inclusion of real time data in the
 simulations. During the calibration process it became evident that some of the
 real time stations were inaccurate and instead of improving the simulation, as
 was hoped, actually made the model unacceptably inaccurate.
- Modify the code of the ISIS engine so that real time recorded stage and flow data can be incorporated into the model.
- Develop a graphical user interface (GUI) to facilitate the exchange of data between the real time network and the hydraulic model.
- Investigate the effect of including the real time data on the simulated flows. As
 part of the research numerous simulations of flow in the Orange River were
 conducted so that the effect of including the real time data in the simulations
 could be determined.
- Test the effectiveness of the decision support system.

Various possible extensions to the project have been identified. They have not been investigated as part of this study but would be logical and useful developments:

- An automatic calibration routine could be developed as an extension to the real time hydraulic model. This routine would compare the actual conditions recorded on the river to the flows simulated by the model and automatically adjust the model parameters to improve the calibration of the model. These parameters include the conveyance of a river section which changes with flow. This is generally adjusted by altering Mannings n for different flow regimes. Should this routine be developed its application on real river systems should be investigated fully as the calibration of the model will depend on the accuracy of the real time data. In the case of the Orange River the calibration process, which was done manually during an iterative process, was impeded by the poor quality of the real time data at several gauging stations. In fact the inaccuracies of the data were only determined in the calibration process (See Chapter 5)
- Extending the cross sectional data in the model to include detail for high flows so
 that the model could be used as a flood management tool. The possibility of
 flooding along the Orange River, particularly near Upington is a problem. The
 hydraulic model could be used to estimate potential flooding along the river and
 the effectiveness and impact of proposed prevention measures. In order to do
 this the model would also have to be calibrated for high flows.
- Water quality modelling could also be included in the simulations. Water quality
 and sedimentation are not yet a concern along the Orange River. However, it is
 envisaged that after the implementation of all the phases of the Lesotho
 Highlands Water Project the reduced flows in the river will result in a higher
 concentration of irrigation return flows which may result in a corresponding
 deterioration in water quality.
- Modelling of the instream flow requirements of the river. Flow versus depth information is often required for environmental studies to determine the instream flow requirements of a river. The calibrated model could be used to determine this information for both existing and future conditions.

1.4 TECHNOLOGICAL DEVELOPMENTS

In order to successfully model the Orange River two major developments were made to the ISIS software. The first development was the real time hydraulic unit. This unit forces the actual stage and flow conditions recorded at several points on the river to be included in the hydraulic simulations. This unit was developed and tested in this study and the effect of the real time data on the simulated results was assessed.

These modifications to the ISIS engine were made by Dr Chris Whitlow, an ISIS developer, in close co-operation with the project team.

The second development was an adaptive timestepping routine. This routine allows a relatively long timestep to be used for the simulation. If instabilities occur the timestep is reduced until a solution is found, or the minimum timestep is reached. The longer timestep results in shorter computational times.

It was necessary to develop a user interface to facilitate the exchange of data from the real time recorded data, which are available from the South African Department of Water Affairs and Forestry, and the hydraulic model. This interface allows the user to easily manipulate the recorded data into the format required by the hydraulic model and to develop flow scenarios to be simulated by the model so that the resultant simulated flows can be evaluated by the user.

These developments are novel in hydraulic simulations.

1.5 BACKGROUND TO THE RESEARCH

Various detailed studies have been made of the Orange River. The Orange River System Analysis (ORSA) was completed in 1990 (BKS, 1991). This study analysed the Lesotho Highlands Water Project (LHWP) together with the remainder of the Orange River system. An important conclusion of the study was that the existing water demands downstream of Vanderkloof Dam would not be met if the proposed (as it was then) LHWP were to be fully developed. The study highlighted the importance of evaporation losses from the river as well as the difficulty of releasing the correct amount of water from Vanderkloof Dam to supply the demands downstream of the dam without allowing too much water, over and above the environmental requirements, to spill into the Atlantic Ocean (BKS, 1990).

The findings of this study were further investigated during the Orange River Replanning Study (ORRS) (BKS, 1995) in which a framework was established for the future development of the river and the utilisation of its water.

The problem of determining the losses from the Orange River was addressed in the Orange River Losses Study Phase 1 (McKenzie et al., 1993, McKenzie and Roth, 1994, McKenzie and Stoffberg, 1995a). The aim of this study was to determine the losses from the Orange River downstream of Vanderkloof Dam. It was found that the net annual evaporation loss from the river was a approximately 10% of the combined

storage of the Vanderkloof and Gariep Dams and as such constituted a significant portion of the water resources of the Orange River.

Following the findings of the first phase of the Orange River Losses study, approval was given by the Water Research Commission for a further study on river losses. The purpose of the Evaporation Losses from South African Rivers (McKenzie and Craig, 1999) was to investigate the processes driving evaporation losses from rivers in order to refine previous estimates of losses from the Orange River between Vanderkloof Dam and the river mouth and also to determine a general methodology for estimating losses from other South African rivers.

In order to verify the methodology proposed by McKenzie and Craig (1999) a hydraulic model of the lower reaches of the Orange River, between Blouputs and Brandkaros, was prepared. In order to accurately model the evaporation from the river, which is dependent on the surface area of the river and therefore also on the flow, an evaporation module was developed by Dr Chris Whitlow for the hydraulic modelling package.

During the course of the evaporation losses study it became clear that a hydraulic model of the Orange River would be a useful decision support tool for the operation of the river and the determination of the releases from Vanderkloof Dam. The development of such a tool was a logical continuation of the model established for the evaporation losses study.

1.6 LAYOUT OF THE REPORT

This report documents the methods used to develop the Orange River decision support system and records the results of the research conducted during the study. The layout is described below.

Before attempting to make the required changes to a hydraulic modelling package the theoretical concepts of open channel flow had to be understood. In Appendix A the St Venant equations of open channel flow are derived from the Reynolds Transport Theorem.

In Appendix B various flow routing methods are summarised and discussed in terms of their applicability to the Orange River. As it was decided that a full dynamic model should be used it was necessary to understand how the St Venant equations are solved. This is summarised in Appendix C.

The design of the decision support system is explained in Chapter 2 and more detail on the Graphical User Interface is give in Chapter 3.

The development of the real time and adaptive timestepping units are described in Chapter 4.

The telemetry network from which the real time data is obtained is described in Chapter 5.

The preparation and calibration of the hydraulic model are described in Chapter 6.

Finally the decision support tool was assessed in Chapter 7.

The conclusions made and recommendation arising from this study are summarised in Chapter 8.

2 BASIC CONCEPTS OF THE DECISION SUPPORT SYSTEM

Because the time taken for a change in flow to travel from Vanderkloof Dam to the river mouth at Alexander Bay is in the order of a few weeks, it is important to understand the consequence of any releases (power and other) on the river. This can only be done by simulating the possible future scenarios based on the current condition of the river. To decide how to optimise the release scenario a decision support tool was devised.

The basic concept of the decision support system is to use a hydraulic model of the Orange River to simulate the releases from Vanderkloof Dam. The ISIS Flow software (Halcrows/IH Wallingford, 1997) was chosen as the modelling software because the project team had close connections to the software developers and the source code could be customised for the project. At this stage (November 2001), the software which has been developed (and is described in this chapter) is yet to be applied in real time, due to the lack of suitable real time data recorded on the river (Chapter 5).

The hydraulic model has been adapted to simulate the forecast effect of the possible future release hydrographs (and the actual releases made) from Vanderkloof Dam, on the stage and flow downstream of the dam. Before these forecast simulations are conducted the initial conditions for the simulation must be known. These initial conditions describe the unsteady flow and stage at the start of the simulation at every computational node in the model. The initial conditions are a mathematical requirement of the model (Appendix C) but they also represent the physical state of the river at the time when the forecast simulation is to be conducted. It follows that the closer the model's initial conditions are to the actual conditions in the river the more accurate the forecast simulation. Because of the length of the river (1400km) and its slow response time (3-4 weeks) the conventional method of gradually changing the steady flow starting conditions to the current conditions is impractical.

In order to improve the estimate of the initial conditions for any forecast simulation it was decided to develop a separate real time hydraulic model of the Orange River to run in parallel with the forecast model used for simulating proposed release scenarios. Real time recorded data are available at several gauging stations on the Orange River as described in Chapter 5. In the real time model the stage at the nodes corresponding to the telemetry stations is "forced" to the recorded values at the real time controls, as described in Section 3.1. The flows at these nodes are then

calculated according to the relevant stage-discharge relationship and propagated downstream. This has the effect of improving the simulated flows downstream of the real time station.

The real time model is run at regular intervals to update the simulated results. The frequency and run length of the updates are determined by the availability of the data and the time since the previous updates. If the data are available in real time the model can be run in real time, alternatively the model is updated at the intervals when the data become available. After the model has been updated with the latest real time data, the results represent a best estimate of the actual conditions of the river. These results can then be used as the real time initial conditions for the forecasting runs. Each forecasting run therefore starts from the most recent estimate of the current river conditions.

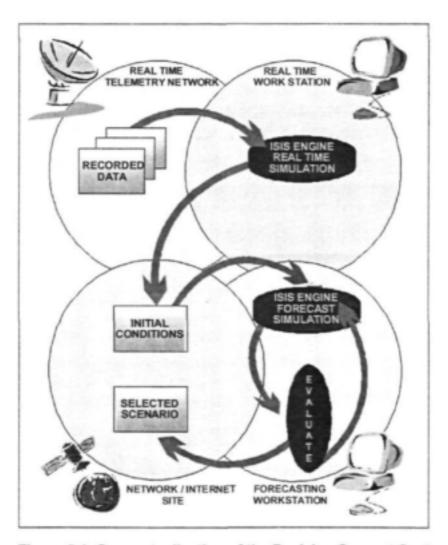


Figure 2.1: Conceptualisation of the Decision Support System

The real time model and the forecasting models are identical with respect to the physical characteristics of the river. They differ only in their use of either real time or forecast data.

The decision support tool developed in this study consists of several components. The inter-relationship between these components is depicted in Figure 2.1 where each circle represents a component:

- The first component is the Telemetry Network of gauging stations to be described in Chapter 5. The stage and flow data are recorded at these stations and transmitted to the Department of Water Affairs and Forestry (DWAF) where they are archived.
- At the Real Time Workstation the ISIS hydraulic model operates in real time.
 The recorded data are downloaded from DWAF and the real time simulation is
 updated as the recorded data are incorporated into the simulation. The up to
 date conditions of the river are then stored on the project network site so that
 they are available to the forecasting workstation or any other interested party
 with access to the site.
- At the Forecast Work Station the proposed release hydrographs are evaluated. The current river conditions available on the project network site are downloaded and used as the initial conditions of the forecast simulation.
 Proposed release scenarios from Vanderkloof Dam and/or changes to the downstream demands are evaluated on a "what if" basis.
- The Graphical User Interface (GUI) to be described in Chapter 3 facilitates
 the exchange of data between the telemetry network and the real time and
 forecasting models and the user. The GUI is not represented by a "bubble" in
 Figure 2.1 but rather controls the processes and the transfer of data.

There is no requirement for the real time and forecasting models to run on the same machine. The only requirement is that both models have access to the project network site where the current conditions of the river are stored.

The purpose of the GUI is to collect and collate the remote real time data, manipulating it into the format required by the hydraulic modelling component. The GUI also facilitates the exchange of data between the real time and forecasting models and the FTP server or LAN. This information includes the results of the simulations, the pre-determined release scenarios and information regarding downstream demands that have to be modelled. This GUI was developed for this project and is described in detail in Chapter 3.

The decision support tool will be used in an iterative manner. When a release scenario is to be evaluated the procedure follows the steps below:

- Download the latest recorded data (which are stored at DWAF) to the real time work station
- Run the real time model to update the initial (current) conditions on the real time work stations
- 3. Load the current conditions to the project network site
- Suggest a proposed release pattern
- Download the current conditions of the river from the project network site to the forecast work station. These are used as the initial conditions for the forecast simulation.
- Simulate (forecast) the release pattern using the hydraulic model on the forecast work station.
- 7. Evaluate the results of the simulated forecast to determine whether the magnitude, duration and timing of the releases are such that the downstream water requirements are satisfied, the losses from the river are minimised and the hydro-electric requirements from Eskom are met.
- If necessary the suggested release pattern can be altered in Step 4 and Steps 4 to 7 can be repeated until a satisfactory result is obtained.

2.1 REAL TIME HYDRAULIC MODELLING

The real-time telemetry data are only available for those nodes in the model that correspond to the real-time flow gauging stations. The model of the Orange River consists of 1726 nodes of which 14 are control structures (Table 6.1). These nodes describe the physical geometry of the river and the simulated results are stored for these nodes. These nodes divide the river into the 14 reaches defined by the 14 modelled control structures (weirs, gauging stations, rapids and water falls), other than the first node which is at Vanderkloof Dam. Of these 14 control structures only 5 are real stage-time controls. There are also 3 real flow-time controls at Vanderkloof Dam and the inflows from the Vaal and Fish rivers.

The purpose of the real-time modelling is to incorporate the incoming recorded data into the hydraulic model so that the modelled results, at all the nodes, other than and including the nodes corresponding to the real time gauging stations, are a best estimate of the flow conditions in the river. The results of the simulation are "forced" to the recorded conditions at the real time controls and the hydrodynamic model then performs the necessary hydraulic routing calculations to determine the subsequent

conditions at all the other nodes where no real-time data exist. These procedures were explained in Chapter 4.

There are various unforeseen, and therefore unmodelled, factors that can alter the flow conditions, such as localised rainfall events, incremental inflows and unexpected losses and abstractions from the river. The effect of these occurrences is minimised in the real-time simulations as the modelled results are corrected to the recorded values at the nodes corresponding to the gauging weirs with telemetry stations.

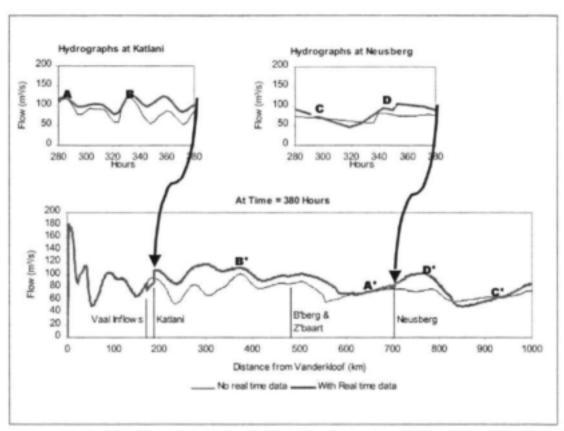


Figure 2.2: Real Time modelling - Flow trajectory output with and without real time telemetry data

Consider for example Figure 2.2 in which a long section of the Orange River is depicted at a certain point in time (380 hours after the start of the run) for two simulations. The thick pink line is the flow profile for the real time simulation with updates from the telemetry data. The thin blue line represents the flow when no recorded data were used, i.e. when the telemetry data were "switched off". Recorded data at Katlani, 190 km from Vanderkloof Dam, just downstream of the Orange-Vaal confluence, and at Neusberg Weir at 703 km from Vanderkloof Dam were included in the real time simulation. There are other real time stations but only these two were used for this explanation. The positions of these stations on the river are indicated by the arrows. The recorded (thick pink) and simulated (thin blue) hydrographs at these

stations are shown in the smaller graphs. Note that the main chart shows flow versus distance at a particular point in time, whereas the two smaller charts show flow versus time at two locations on the river. The (negative) vertical discontinuity at the Vaal River confluence is due to the discrete river losses and demands taken off at this point. The Vaal River inflows were not modelled.

A and B are crests on waves at Katlani. C and D are "points" on the hydrograph at Neusberg Weir. "Crest" A travels from Katlani to position A' (450 km) in 96 hours (380 – 284=96 hours). "Crest" B travels from Katlani to position B' (180 km) in 50 hours (380-330=50 hours). "Cross-over" C travels from Neusberg Weir to position C' (220km) in 80 hours and "crest" D travels from Neusberg to position D' (80 km) in 24 hours.

At the nodes corresponding to Neusberg and Katlani the simulated data were continuously adjusted (up to the latest time at 380 hours) to the recorded values resulting in vertical discontinuities in the trajectory (main chart). These discontinuities represent the differences between the simulated results (computed just upstream of the real time nodes) and the recorded conditions (at the real time nodes). These differences are due to calibration errors and the effects of unmodelled events which have affected the flow conditions. For example the increase in flow at Katlani represents the unmodelled (and as yet unmeasured) inflows from the Vaal River, which occur just upstream of Katlani.

As the real time simulation progresses towards 380 hours the recorded flows are propagated down the river, resulting in the differences between the thick and thin lines in the main chart. At the next downstream real-time station the recorded data for that station, if available, once again replace the simulated values, resulting in another (although smaller) vertical discontinuity in the flow projection. The simulated conditions at any point on a reach are therefore dependent on the recorded data at the closest upstream telemetry station for the relevant time history of flows at that station. If for some reason the flows are not recorded at a real time station the simulated flows at the station are propagated further downstream as indicated by the thinner blue line. In essence the up-dates are propagated down the river from the real time stations as far as the next real time station, the adjustments travelling with the flow hydrograph, whose speed will vary from place to place depending on the flow and channel geometry.

In more detail, consider the crests of waves A and B on the hydrograph at Katlani and the "points" C and D on Neusberg's hydrograph. The waves at A and C occurred earlier in time than B and D and have therefore progressed further down the river as shown in the main chart by A', B' C' and D'. In the real time simulation A' will have reached Neusberg where the flows will again be corrected to the values recorded at Neusberg. The differences between the shapes of the hydrographs at the telemetry stations and the corresponding sections of the flow profiles are due to the fact that x-axes show time and distance respectively. In fact the hydrograph from A to B is stretched and reversed in the profile from B' to A'.

Note that the distance travelled by crest A, to A', is 450 km in 96 hours, that is at a speed of just over 100 km/day. In the lower reach where the river is wider and evaporation has taken its toll, the "cross-over" point C has travelled 220 km to C' in 80 hours, slowing to about 70 km/day.

2.2 DETERMINATION OF THE RELEASE SCHEDULE

The releases from Vanderkloof Dam are currently made according to an agreement between ESKOM (the South African electricity supply utility) and the South African Department of Water Affairs and Forestry (DWAF). This agreement defines the quantity of water which can be released in the medium to long term. The current agreement is that a quota of water for a year is allocated for generation purposes on 1 May every year. This quota is dependent on the amount of water in the Orange River System on the decision date and it must be supplied at a 99.5 % assurance of reliability at a 10% load factor. This allocation for power supply can be increased within the year in the event of the dams in the system filling due to high runoff in the wet season (October to April). The Water Resource Planning Model (WRPM) is used to assess the resources of the Orange River in order to determine these quotas (BKS, 1997).

In the short term the current policy is that the releases from Vanderkloof Dam are finally determined a day in advance of their implementation and they may include 2 peaks within 24 hours. Emergency releases, however, can be made through the turbines to correct the phasing of electricity on the National Grid. These releases can be at full load for a total of 4 hours in every 24 hours, but occur with random timing.

It is envisaged that the tool developed in this study will be used for the short-term operation of the river so that the releases can be modelled and their effect on downstream flows can be assessed before a final decision on the release (not the

emergency release) is made. The effect of any emergency releases can be assessed, after they have been made and the release scenario adjusted, if necessary, to account for the effect of the emergency releases.

When a decision is to be made regarding the release schedule, the forecasting model obtains the most recent results from the real time simulation. The simulation therefore starts from the best available initial conditions. The operator of the forecasting model is able to define the hydrographs for the proposed releases from Vanderkloof Dam through each turbine in terms of quantities released and the timing of the releases.

For the practical operation of the dam, decisions regarding operation need to be made one day in advance of their implementation. The release schedule for the first day of the forecast simulation is therefore fixed by the decision taken the day before and cannot be altered, only future releases can be optimised.

As most of the demands to be satisfied are located a considerable distance from Vanderkloof Dam it will take several weeks for the releases to reach them depending on the flow conditions in the river. It is therefore necessary to simulate several weeks of flows before the forecasting runs can be assessed.

Another important effect of these travel times should be noted. If during the evaluation of a proposed release scenario, it is seen that unexpected hot and dry weather has increased the expected evaporation from the river, with the result that there will be a shortage of water at the river mouth, say for example in a week's time, it will not be possible to correct the shortfall as the next releases which are to be made tomorrow will only reach the mouth in 6 weeks time (depending on the flow conditions in the river). The users at the river mouth will however be forewarned about this shortfall, which is an improvement on the current situation.

In fact it is important to note when determining the release schedule that the results of the simulation consist of 2 parts, the forecast flows ("actual" forecast flows) resulting from the releases which have already been made and the ("proposed") flows which result from the proposed release scenario which is being evaluated. The "actual" forecast flows resulting from the releases which have already been made propagate down the river ahead of the "proposed" flows which are being evaluated. The period of the release scenario must be long enough for all the "actual" flows to propagate out of the system so that the full effect of the proposed scenario can be evaluated.

2.3 SUMMARY

A decision support system was devised to help decide how to optimise the release scenarios from Vanderkloof Dam. This decision support system consists of:

- A hydraulic model of the Orange River which is used to evaluate the proposed release scenarios from Vanderkloof Dam,
- A real time hydraulic model which is used to update the simulated conditions of the river with recorded telemetry data so that a best estimate of actual flow conditions is available for the whole river
- A graphical user interface (GUI) which controls the flow of data between the various components of the decision support system and the user.

The forecast simulations are conducted on an iterative basis, adjusting the flow releases until all the downstream flow requirements are met. During the evaluation of these proposed release scenarios it is important to simulate a long enough period so that the full effect of the proposed schedule on the most downstream users can be evaluated.

Before these forecast simulations are conducted their initial conditions must be determined. The initial conditions are a mathematical requirement of the model and represent the physical condition of the river at the start of the flow simulation. The closer the initial conditions are to the actual conditions of the river the more accurate the forecast simulations. These initial conditions are determined by updating the real time simulation of the river with the data recorded at several gauging stations along the river.

This chapter describes the concepts of the decision support system and the interaction between its various components. The practicalities of real time modelling and the forecast simulations are also discussed. These concepts are further developed in the following chapter where the GUI is described in detail.

3 GRAPHICAL USER INTERFACE

The function of the Graphical User Interface (GUI) is to co-ordinate the transfer of data between the real time telemetry network, the ISIS engines and the user. The ISIS software and the GUI are two separate software components. The GUI acts as a link between the real time data and the ISIS software. The ISIS software performs the hydraulic computations and provides the tools to view the results of the computations. The interface is just that – an interface between the data, the ISIS engine and the user.

The decision support system can be further divided into the real time station and the forecasting station. It is important to remember that the real time simulation is a separate process from the forecast simulation (See Chapter 2) and is independent of it. The results of the real time simulation are used as the initial conditions of the forecast simulations. The GUI provides the link between the real time results and the forecast simulation.

There are also two types of forecasting simulations. The first is referred to as the "Real Forecast". This forecast is performed either manually or automatically after a real time simulation has been completed, updating the current conditions. It uses proposed releases from Vanderkloof Dam and demand information which have already been assessed and accepted. The results of this simulation represent the best estimate of what will happen on the river in the near future (in the next 24 hours), given that the releases and demands are not changed from those previously determined and included in the simulation. The second type of forecast simulation is used to test the effect of the demand scenarios and release patterns on a "what if" basis. The releases and/or demands are adjusted, the simulation is conducted and the results are assessed. The process is repeated until the user is satisfied with the release or demand scenario, as described in the introduction to Chapter 2.

The decision support system therefore consists of the following modules:

- A real time model. This is the ISIS software which uses the real time data to perform simulations. The initial conditions for the real time simulation are taken from the results of the previous real time simulation.
- A forecast model. This is the ISIS software which simulates the proposed releases from Vanderkloof Dam, which the user has supplied. The initial conditions are the results of the most recent real time simulation. There are two types of forecast simulations, one which updates the 24 hour forecast

conditions on the river and one which the user can use to assess and modify the proposed release scenarios.

 The Graphical User Interface (GUI). The GUI facilitates the exchange of data between the real time network and the real time model, between the real time model and the forecast models and between the user and the real time and forecast models and was illustrated in Figure 2.1.

For any river system which is modelled using the decision support system, it is envisaged that only one real time simulation will be conducted. Forecasting simulations can be set up on the same machine as that used for the real time simulation or at one or more remote workstations. The only limitation on the number of forecasting work stations is the number of valid ISIS licences available for use by the project team.

Before the processes in the GUI are explained in more detail it is necessary to give a basic outline of the files which are used and produced by the system.

3.1 DESCRIPTION OF THE FILE STRUCTURE

Both the file name and the file extension describe the files used by the decision support system. The file extension describes the type of file and the file name describes the scenario being analysed. The file names are input by the user but for the sake of this description the following naming convention will be used:

- REAL.*- files used in and produced by the real time model
- REAL_FORECAST.* files used in and produced by the update of the (shortterm) forecast after a real time simulation
- SCEN.*.- files used in and produced by forecast simulations.

The files are described in this section only in terms of the data which they contain and the way in which they are used in the decision support system.

3.1.1 The ISIS Data File (*.DAT)

This is the ISIS data file that describes the hydraulic units and the physical characteristics of the river, including the cross-sectional data, the distance between the cross-sections and the roughness of the river reaches. The determination and calibration of these properties are explained in Chapter 6. Copies of this file (REAL.DAT etc) are used for the real time and forecast simulations so that the basic data describing the physical properties of the river are identical for all simulations of the river.

3.1.2 The Remote Data File (*.RTM)

These files contain time series data used by the real time units in the ISIS simulations. The data describe the stage-time series and flow-time series for the real time units. The data contained in this file can either be the real time data as recorded on the river or they can describe the release and demand scenarios which the user wants to assess. In other words, it contains the data which are changed over the course of various analyses and can therefore not be kept in the Isis *.DAT file.

In particular, the **REAL.RTM** file is used in the real time simulation and contains the real time recorded data as well as the hydrographs describing the demands which are being abstracted from the river. The file **REAL_FORECAST.RTM** contains additional information on future releases and demands. It is expected that the proposed future demands included in the REAL_FORECAST.RTM will eventually be used in the REAL_RTM

The SCEN.RTM files used in the forecast simulations contain the demand hydrographs as well as the scheduled and estimated releases from Vanderkloof Dam, but exclude any real time data.

3.1.3 The Policy Files (*.POL)

The policy file describes the demand policy which is to be analysed in the system and is used as input to the GUI. The GUI writes the information to the appropriate *.RTM file. The demand policy is a time series of abstractions. The REAL.POL file contains the demands which most accurately describe what is currently being abstracted from the river and what will be most likely abstracted at a future date. The real.pol file is used in the update of the forecast conditions. The SCEN.POL file contains the demands which are being abstracted during the forecast runs as well as the releases from Vanderkloof Dam which are being assessed. The GUI enables the user to easily modify the data in the SCEN.POL file before the simulation is made and the results assessed.

It should be noted that ISIS cannot directly access the information in the *.pol file. The information is first written by the GUI into the ISIS compatible format in the *.rtm file, which is then read by the ISIS data file.

3.1.4 The result files (*.ZZS, *.ZZN, *.ZZL, *.ZZR, *ZZD)

The *.ZZ* files are all ISIS output files.

- Snapshot results (*.ZZS) describe the flow conditions at all computational nodes for a particular point in time. The REAL.ZZS file describes the conditions on the river at a point in time. It is the best estimate of the actual conditions at the time. These are the initial conditions for the next real time simulation or forecast simulation.
- Unsteady results (*.ZZN). This file is the output from the unsteady flow simulations. It contains the flow, stage, Froude number and velocity for every saved timestep at every node.
- Label File (*.ZZL). This file contains information regarding the labels used in the ISIS data file. It is produced in the unsteady simulations and is used in viewing the simulated results
- Diagnostic File (*.ZZD). This file contains diagnostic information about the simulation.
- Tabulated Results (*.ZZR) The *.ZZR is produced during result processing and consists of tabular output of flow conditions as a function of time and position.
- Rating Diagnostic File (*.ZZU). This file contains information relating to the stage discharge relationships at the control sections as well as at the Real Time units.

The REAL.ZZ* files describe the results of the real time simulations, whereas the SCEN.ZZ* files describe the results of the forecast simulations. The REAL_FORECAST.ZZ* files are renamed to the date at which the real time simulation ended. For example 200006012_1030.ZZN is the unsteady result file which was generated starting from the initial conditions which best describe the actual conditions at10h30 on 12 June 2000.

3.1.5 Calibration File (*.CAL).

The time series data in the calibration file can be compared to the simulated result. The real time data are written to the REAL.CAL file so that the recorded data can be compared to the simulated data.

3.1.6 The log file (*.LOG)

A log of the processes performed by the GUI during a simulation are written to the *.log files.

3.2 THE PROCESSES OF THE DECISION SUPPORT SYSTEM

The processes performed by the GUI are illustrated in Figure 3.1, which is based on Figure 2.1 but gives more detail. The four bubbles in Figure 3.1 represents four separate locations where the required files are to be stored. The top left bubble

represents the real time telemetry network and the location of the real time files. These files can be stored on either the forecast or real time workstations on a local area network. The real time files for the various weirs where data are recorded do not have to be stored in the same location.

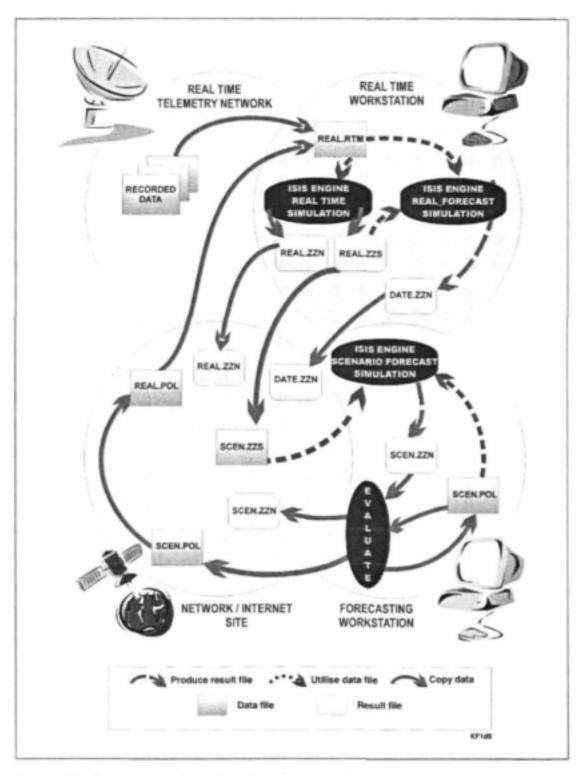


Figure 3.1: Processes of the Decision Support System

The top right bubble represents the real time work station. This is where the real time ISIS model performs the real time simulations and then updates the forecast of flow conditions.

The bottom left bubble represents the remote directory which is used by the GUI to store the result files. This directory is referred to as the "Link Directory" in the GUI.

The bottom right bubble represents the forecast workstations, where the release scenarios are simulated and evaluated.

3.2.1 Real Time Simulation

The recorded real time data files are copied to the Real Time Workstation. The files are read, the data checked and incorporated into the REAL.RTM file. Any errors and possible inconsistencies detected during this process are flagged and logged in the file REAL.LOG.

The official policy file, REAL.POL is also downloaded automatically from the Link Directory. This file contains the demands appropriate to the current month and weather conditions as well as the confirmed and estimated forecast releases from Vanderkloof Dam. Only the policy data describing the demands are incorporated into the REAL.RTM file. Any data in the REAL.RTM, which corresponds to that in the REAL.POL file is overwritten and updated in this process. If the policy file, describing the demands is altered, the changes are automatically included in the next real time simulation. It is assumed that the file is correct and the data are automatically entered into the REAL.RTM file.

Once the REAL.RTM file has been updated, ISIS simulates the flow in the river in real time mode, incorporating all real time data into the computations, up to the time corresponding to the period for which real time data are available. The results of this simulation are the initial conditions for the forecast simulations.

The real time stations are defined either as 'essential' or 'non-essential'. If a station is 'essential' the real time simulation will not proceed beyond the period for which real time data are available. If the station is 'non-essential' the simulation can continue without the data. This allows the simulation to continue in cases where a station ceases transmission for some reason and no real time data are available.

Once the real time simulation has proceeded as far in time as real time data availability allows, the computed results of the ISIS simulation are written to the Link directory. The results in the REAL.ZZS file record the conditions in the river at all computational nodes for the time when the real time simulation paused. The dynamic results for the real time simulation in the REAL.ZZN file are also updated. These results can be viewed through the ISIS software.

Once the real time simulation is complete the real_forecast simulation is updated. The REAL.POL file is once again used as it describes the proposed demand and release scenarios. The REAL.ZZS file is used as the initial conditions for the run. This REAL.ZZS file represents the conditions on the river at a specific point in time, say 14 June 2000 at 00h30. The results of the real forecast are re-named to 20000614_0030.ZZN so that the date and time of the start of the forecast simulation are known. These results are then copied back to the Link Directory, where they can be accessed by interested parties.

In order to give the operator of the system control over the processes, the errors and warnings are not dealt with explicitly by the model. If, after reviewing the simulated results and the logged errors, the operator decides that incorrect data were incorporated into the simulation, the real time run can be stopped and the real time data corrected or excluded as appropriate by manually editing the REAL.RTM file. The real time simulation can then be restarted at an appropriate point in time prior to the corrected error. Using the ISIS software the REAL.ZZN, which holds the results for the simulated period, can be interrogated to produce the initial conditions for the re-started simulation.

3.2.2 Forecast simulations

Several forecast models can be set up and run independently on condition that each model has its own valid ISIS licence. Under normal circumstances, however, only one ISIS model will be needed and the forecast simulations will be performed on the same computer as the real time simulations. The forecast models are based on ISIS data files identical to that used by the real time model, although the names of these files must differ to prevent the real time results being overwritten by the forecast results.

At the start of the forecast simulation the REAL.ZZS file is downloaded and renamed by the GUI to match the relevant ISIS (Forecast) data file name. These data describe the most up to date conditions of the river and are used as the initial conditions of the simulation.

Various release policies and demand conditions can be written into *.POL files using the GUI. These scenarios can then be simulated and the results assessed using the ISIS workbench.

The *.POL file, describing the release scenarios and demand patterns, along with the corresponding simulated results can then be copied to the link directory so that other users can also evaluate them. Included with these files is an ASCII data file containing information regarding the author of the files and the run descriptions.

Once a scenario has been selected the *.POL file can be copied to the REAL.POL file so that the appropriate demand data can be incorporated into the real time simulation. This is necessary because information describing the abstractions to satisfy the demands is not included in the real time telemetry network.

3.3 SCREENSHOTS OF THE GRAPHICAL USER INTERFACE

The graphical user interface was designed to be as simple as possible. Before a run can take place the user is only prompted for the data file and directory information and the ISIS run parameters.

As the program initialises the user must log on and choose the type of run which is to be performed. If the first option is chosen, only the real time simulation will be updated and the results will be stored on the Network Site. If the second option is chosen only forecast simulations will be performed. The most up to date results from the real time simulation will be downloaded from the Network Site, where they are stored before the forecast simulation takes place. The third option updates the real time simulation. Immediately after this simulation is complete the "real forecast" simulation is conducted.

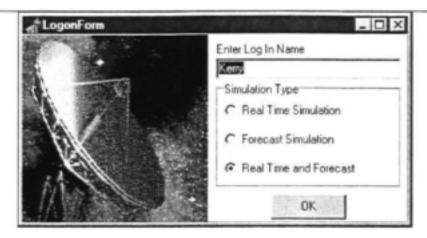


Figure 3.2: The logon Form

After the user has logged on the Task Bar appears (Figure 3.3). The task bar gives the user access to the tasks which must be performed. The tasks for setting up the simulations must be performed in the sequence explained below or left to right within the groups on the task bar. The menu items for some of the tasks are inactive until all the required preceding tasks have been performed.

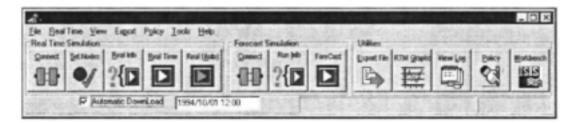


Figure 3.3: The Task Bar

The Task Bar is divided into three sections: the real time simulation, the forecast simulation and the utilities. The procedures to start the real time and forecast simulations are shown in Figures 3.4 and 3.5 and are discussed in Sections 3.3.1 and 3.3.2 respectively.

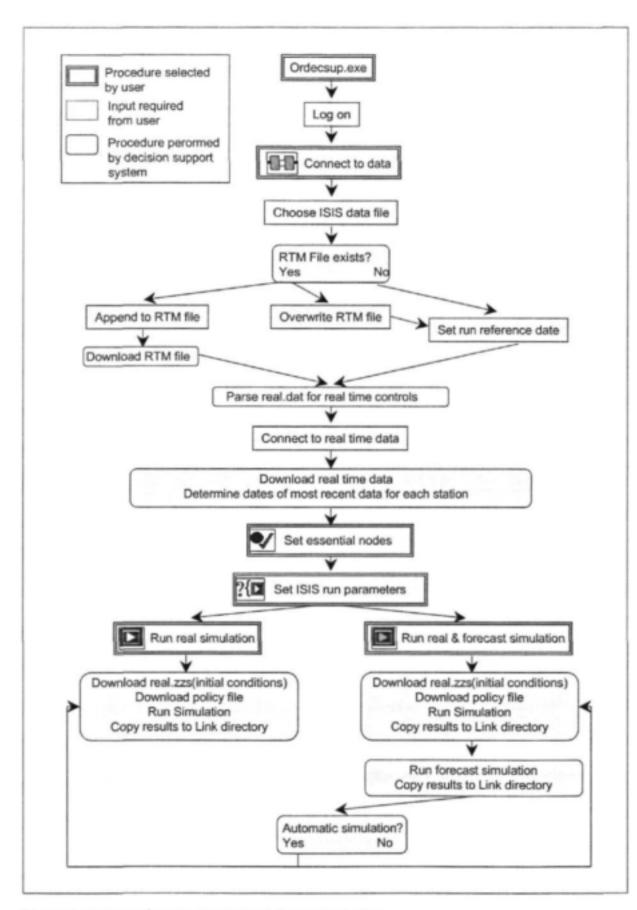


Figure 3.4: Procedure to start a real time simulation

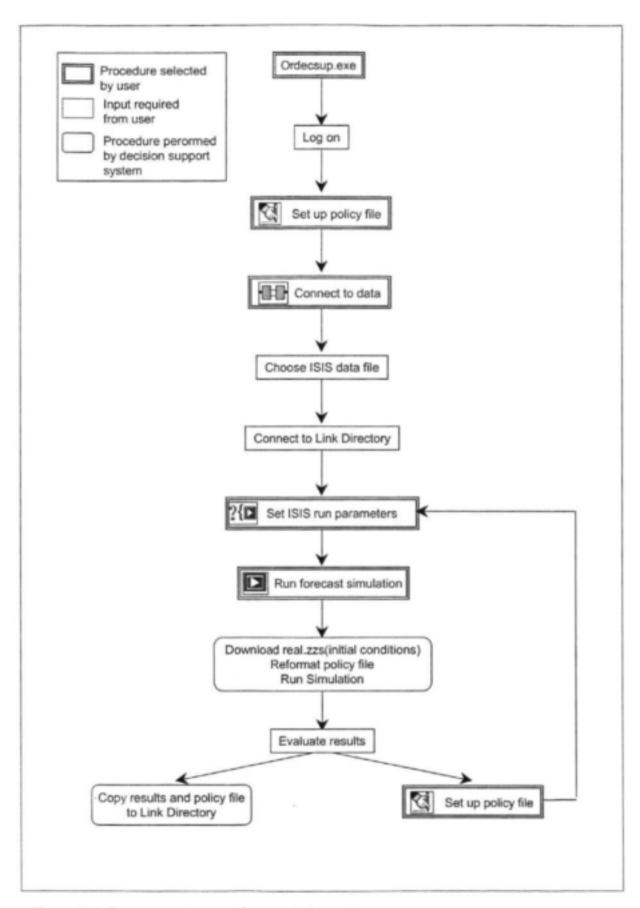


Figure 3.5: Procedure to start forecast simulation

3.3.1 The real time simulation

The first task is to connect to the relevant data files. This is initiated by clicking on the Connect Button. The user is required to select the relevant ISIS data file as shown in Figure 3.6



Figure 3.6: Selecting the data file

Once the data file is selected the program searches for a corresponding RTM file. If a file is found the user can choose to either overwrite the RTM data, or to append the new information to the existing RTM file (Figure 3.7). The date shown on the form is the reference date of the initial real time simulation. All results given by and data input to the ISIS hydraulic engine are in hours from the start of the initial run, or hours from the reference date. If the user chooses to overwrite the RTM file, or if no RTM file was found, a new reference date must be input. This date should then correspond to the date and time that the simulation is to start. This would correspond with the date and time of the most recent real time simulation update (the previous update), which would provide the initial conditions for the start of this real time simulation. The date shown on the task bar corresponds to the date on this form.

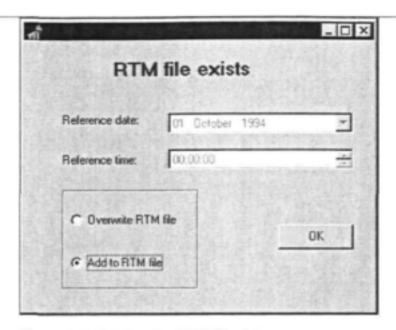


Figure 3.7: Setting the RTM file data

The next form which appears (Figure 3.8) requires the user to connect the real time nodes in the model to the relevant data directories. All the real time nodes as well as the "Link" directory are listed in the top left box. The "link" directory is the Network Site where all the real time results and policy files are stored (Figure 3.1).

The user then selects some (or all of these nodes) and by clicking on the >> (or >>>> for all the nodes) transfers them to the top right hand box. The nodes which appear in the top right hand box are the nodes which will be connected to the directory selected when the "Network" button is clicked. Once the "Network" button has been clicked and the relevant directory has been selected, the nodes and the directories are displayed in the bottom box. The program will then search for the real time data files in the directory displayed. It is therefore evident that the program is very flexible in terms of where the real time data is kept. This was to facilitate the fact that the data might not all come from the same source (for example the real time data for the gauging stations is obtained from DWAF, whereas the data for the releases from Vanderkloof Dam may be supplied from ESKOM)

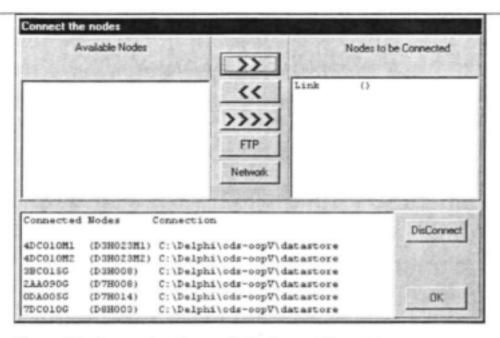


Figure 3.8: Connecting the model to the real time data

If one or more connected nodes are selected from the bottom box and the "Disconnect" button is clicked the node will be disconnected from its real time data and it will not receive any real time data for the simulation. It will then appear back in the top left hand box, indicating it has not been connected to any real time data.

The second step in setting up the real time simulation is to select the real time nodes for which real time data is required for the simulation to continue. On selecting this

button on the taskbar the Essential Node Selection Form is displayed (Figure 3.9)

Each of the real time nodes is listed on this form, along with the most recent date for which real time data is available. The DWAF gauge number and the name of the gauging station are also shown. An essential node is considered to be a node where additional real time data must be available before a simulation can continue. The user must select these essential nodes from the list.

If a node is not selected the simulation will continue even if there is no data available for this node. When the simulation is begun the program downloads the latest real time data and determines the latest data for each of the essential nodes. The program then loops through the list of selected nodes to determine the length of the simulation. If there is no new real time data available at a selected gauging station a message will appear saying that the simulation cannot continue until more real time information is available.

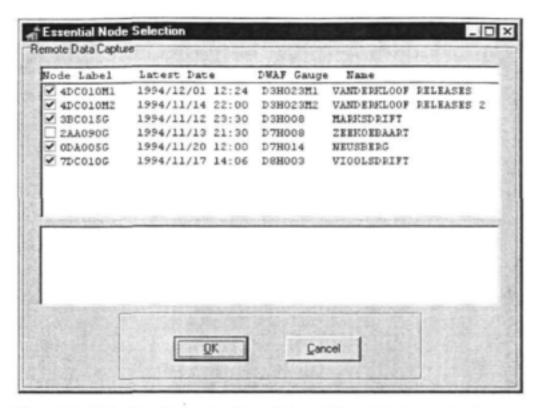


Figure 3.9: Selecting the nodes for which real time data is required

The next step accessed from the toolbar is to set the ISIS run time parameters



This is shown in Figure 3.10.

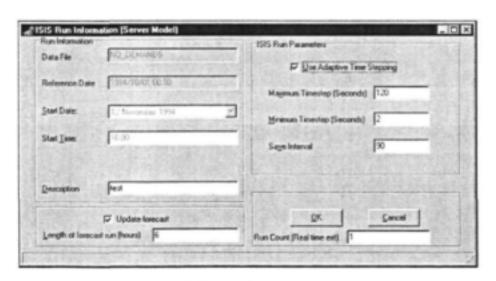


Figure 3.10: Setting the ISIS run time parameters

The data file, reference date and the start date and time are displayed but cannot be changed as they are dependent on the previous simulations. The user can enter a brief description of the simulation and can choose whether the real forecast simulation should be updated after the real time simulation is complete. If the real

forecast simulation is to be updated the length of this forecast simulation must be specified (in hours).

The user must also specify whether adaptive timestepping must be used, the timestep information (in seconds) and the interval for which the results must be stored (in multiples of the maximum timestep). The run count indicates how many times the real time simulation will have been updated when this update is complete.

Finally the real time update simulation can be started by clicking on the "Run Button"



Alternatively the "Auto Run Button" and be selected. If this button is selected the program automatically downloads the real time information and updates the real time simulation (and real forecast simulation) at user specified intervals.

3.3.2 The forecast simulation

The forecast simulation is set up in much the same way as the real time simulation.

First the user must connect to the Network Site, where the real time simulation results are stored (Figure 3.1). The same form as shown in Figure 3.8 is used to do this, except that in the case of the forecast simulation only the "Link" to the real time results needs to be connected as shown in Figure 3.11.

Once the connection is made the results of the most recent real time simulation are automatically downloaded from the project network site ("Link" Directory). The

following step is to set up the ISIS run time parameters , in the same way as shown in Figure 3.10. The start date and time for the forecast simulation cannot be set by the user as it is automatically set to the date and time of the latest real time simulation results. The user needs to set the timestep parameters and the length of the forecast simulation.

The forecast simulation can then be started



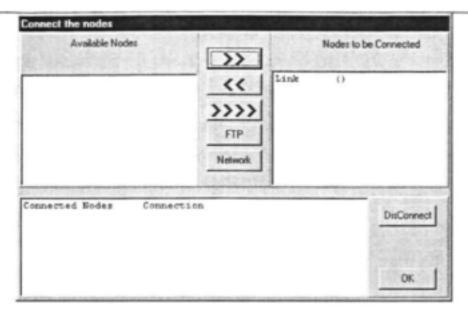


Figure 3.11: Connecting the forecast simulation to the real time results

3.3.3 The Utilities

Several utilities were coded to enable the user to easily manipulate the data and review the simulation results.

The "Export Button" allows the user to copy the results and policy files to a directory other than the link directory.



Figure 3.12: The event log and error form

During the real time and forecast simulations a log of all the events is kept. On viewing this log the user can determine if any errors occurred and get the details of these errors as shown in Figure 3.12.

A utility was also coded to allow the user to automatically set up a policy file
The policy for the releases through Turbine 1 at Vanderkloof Dam are shown in
Figure 3.13.

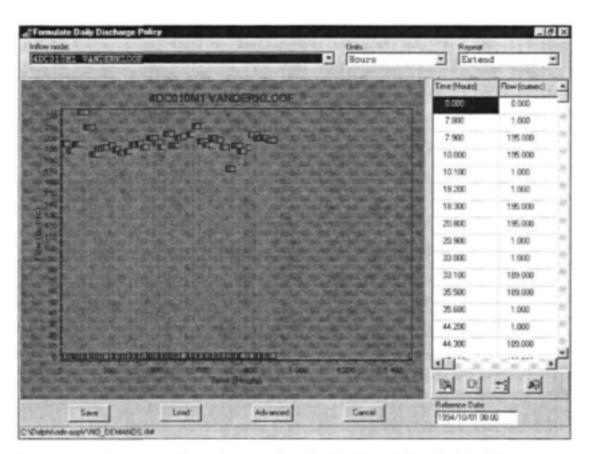


Figure 3.13: Setting up the release policy for Turbine 1, Vanderkloof Dam

A policy can be set up for any of the nodes in ISIS defined as QTBREAL. These nodes are listed in the top left hand drop down box (currently showing "4DC010M1 VANDERKLOOF"). On selecting one of these nodes the data for the policy is displayed in a grid format and the chart is drawn.

The users must select the unit of time for the information and define whether the information should be repeated in cycles or extended past the time period defined.

There are several buttons below the information grid allowing the user to easily edit the data and if the "Advanced" button is selected the user can edit the ASCII policy data file directly. The user can also choose to graphically view any of the data records in the RTM file

Figure 3.14 shows the releases from the two turbines at Vanderkloof Dam, which are included in the RTM file.

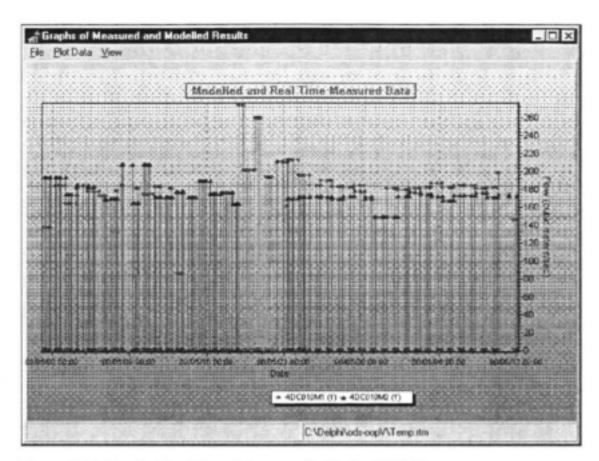


Figure 3.14: Vanderkloof Dam data recorded in the RTM file

Finally the ISIS workbench can be viewed. The ISIS workbench enables the user to interrogate the ISIS results. The user is referred to the ISIS manual for more information on the functioning of the workbench (Halcrow & HR Wallingford, 1995).

3.4 SUMMARY

This chapter described the functioning of the Graphical User Interface (GUI) and follows on from the previous chapter where the basic concepts of the decision support system are explained.

The decision support system consists of the following modules:

 A real time model, which is the ISIS model which uses real time data to perform hydraulic simulations to produce the initial conditions for the forecast simulations.

- A forecast model, which is the ISIS model used to simulate the proposed releases from Vanderkloof Dam. There are two types of forecast simulations, one which updates the 24 hour forecast conditions on the river and one used to assess and modify the proposed release scenarios.
- The Graphical User Interface (GUI), which co-ordinates the transfer of data between the real time telemetry network, the ISIS engines and the user.

The nomenclature of the data and results files used in the GUI is described. The file name describes the scenario being analysed and the file extension describes the type of result or data file.

The processes performed by the GUI are described in this chapter. The data and result files are stored in 4 separate locations:

- The real time telemetry network and the location of the real time data files
- The real time work station, where the real time ISIS model performs the real time simulations and then updates the forecast flow conditions.
- The "Link" directory, where the result files are stored
- The forecast work station, where the release scenarios are simulated and evaluated.

The transfer of data and results between these locations is described. Finally screenshots are used to describe how to use the GUI.

The theory of modelling open channel flow is described in the Appendices. The basic concepts of the decision support system are explained in the proceeding chapter (Chapter 2) and the functioning of the GUI is described in this chapter (Chapter 3). In the following chapters the developments made to the hydraulic model in order to model the Orange River in real time are discussed (Chapter 4), the real time telemetry network on the Orange is described (Chapter 5) and the population and calibration of the hydraulic model of the Orange River is discussed (Chapter 6) before the decision support system is assessed (Chapter 7).

4 HYDRAULIC MODELLING DEVELOPMENTS

The purpose of this chapter is to describe the developments made to the ISIS hydraulic model in this study so that it could be applied to the Orange River. The first development was the inclusion of a real time control unit, which would enable computational values to be replaced by recorded data at the real time controls. The second development was the adaptive timestepping routine which significantly reduced the computational times of the simulations.

4.1 THE REAL TIME UNIT

The ISIS model uses the Priesmann 4 point implicit solution method to solve the St Venant equations of flow. Internal boundaries are control sections which divide the river into separate reaches. The internal boundary conditions are defined by equations relating flow and stage in the general form Q=ah^b, where h is the water depth, a is a coefficient depending on the structure and b is a value greater than or equal to 1.5 for weirs and 0.5 for free flow under a sluice gate. These internal boundaries are modelled using empirical or semi empirical equations and include different types of weirs, sluices, bridges, junctions and bifurcations. Those used in the model of the Orange River are described in more detail in Chapter 6.

External boundary conditions are required at the extreme ends of the model. Under sub-critical flow conditions an independent boundary condition is required at the upstream and downstream end of the model. For supercritical flow two independent boundary conditions are required at the upstream end of the model. These boundary conditions are defined by stage-discharge (rating curves), stage-time or discharge time relationships.

The real time unit which is described in this section is designed to force the simulated stage and flow at a control section in the model to match that recorded on the river. By doing so the simulated results are corrected to actual values. The accuracy of the simulation downstream of the real time unit (for sub-critical flow) is therefore improved.

In order to make this unit independent of the format in which the real time data are recorded, the real time data must be re-written to an ASCII *.RTM (real time) file, which is then read by the ISIS model. The Graphical User Interface (GUI) developed in this study performs this task.

In technical terms the real time unit is a modified boundary condition. (See Appendix C.2.1) It can either be a real flow-time control (QTBREAL) at the upstream boundary, or a flow-stage control (QHREAL) at an internal boundary.

4.1.1 The Flow-Time Real Time Control (QTBREAL)

This control defines an external boundary relationship and is used to model inflows and abstractions from the river in real time. The real time flows are recorded as a set of data pairs comprising flow and time. These flows are input into the model at the recorded times. The time intervals do not have to match the modelled timesteps because the model interpolates between these data pairs, either linearly or using a cubic spline (to be selected by the user).

The user must also specify a default flow-time relationship. If no real time data are available the simulations will occur using these default values.

The QTBREAL unit was developed to model the released flows from Vanderkloof Dam and abstractions from the river in real time, although the latter are not recorded in real time on the Orange River. Using the GUI the user can alter the abstraction scenarios before a simulation run is started. The abstraction information is then written to the RTM file and used by the QTBREAL unit in the simulation. This allows the user to easily analyse various scenarios without changing the ISIS data file, which includes the river geometry and flow controls which are not operated in real time.

A smoothing function was written for the transition between the default Q-t relationship (which is modelled when no real time data are available) and the real time Q-t relationship. The user must specify the number of time-steps over which this transition is to take place and the percentage change which must take place between each time step. The purpose of this smoothing is to allow the model to damp out (numerically diffuse) the differences in the data sets which, because they are transients, would cause instabilities in the modelled flows.

4.1.2 The Flow-Stage Real Time Control (QHREAL)

This unit is an internal control based on recorded stage at weirs or gauges and is used to model recorded stage and its associated flow. The real time stage at a gauging station is recorded as a set of data pairs comprising stage and time. The unit acts as a flow-stage control and as such the user must define the flow-stage (Q-h) relationship that exists at the control. The model forces the stage immediately upstream of the node to equal that which was recorded. The related real time flow is determined, using the Q-h relationship and propagated downstream of the control

structure. This is in accordance with sub-critical flow conditions. The flow upstream of the weir is not adjusted to the real time flow but is left at the simulated flow which has propagated down the reach upstream of the control. Comparing the simulated flow immediately upstream of the weir to the real time flow immediately downstream of the weir gives an indication of the accuracy of the calibration of the upstream reach.

It is necessary to define river cross sections immediately upstream and downstream of a real time control unit. The three units defining a real time gauge or weir are therefore the upstream cross section, the real time unit and the downstream cross sections as shown in Figure 4.1. Although these units are shown some distance apart in Figure 4.1 (for clarity), the defined distance between the sections in the model is zero. Two sets of results are available at the real time unit, the results at the upstream cross section and the results at the downstream cross section.

Consider for example Figure 4.2 and Figure 4.3 (Note the change in scale for the charts). The positions of the 2 sets of charts are indicated in Figure 4.1.

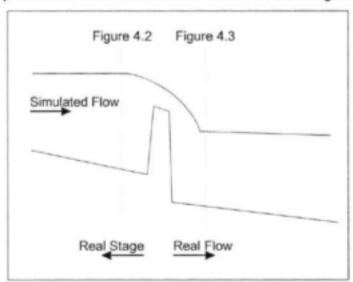


Figure 4.1: Longitudinal section of a real time flow-stage unit

Figure 4.2 shows the simulated flow and stage immediately upstream of the real time unit, compared to the recorded stage and its associated flow. It can be seen that the stage upstream of the control is equal to that of the recorded stage (because the unit has forced the stage to the recorded stage). The flow upstream of the unit does not equal that of the "recorded flow". Instead it is simulated flow which has propagated downstream and reached the control. Differences between the recorded and simulated results give an indication of whether the model is correctly calibrated and the net effect of inflows or abstractions from the upstream reach.

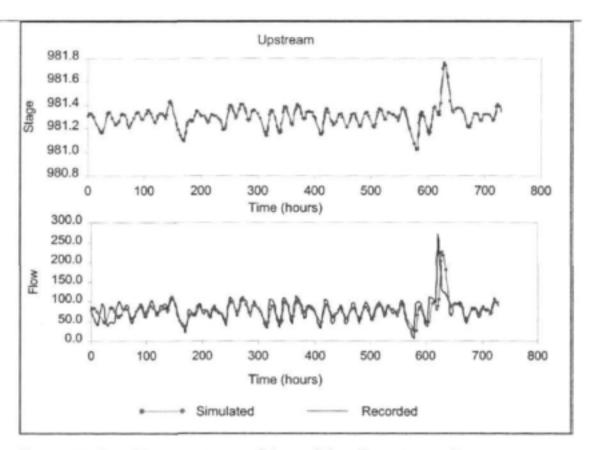


Figure 4.2: Conditions upstream of the real time flow-stage unit

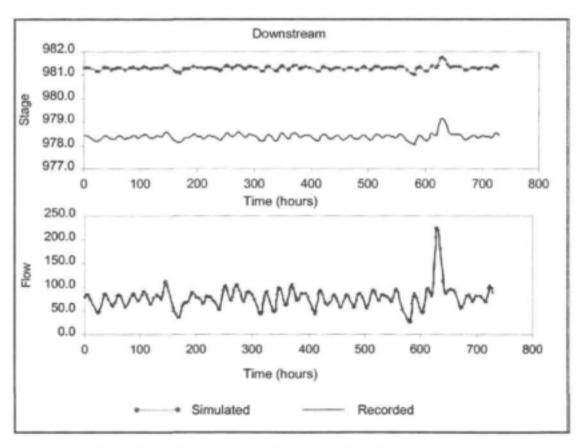


Figure 4.3: Conditions downstream of the real time flow-stage unit

Figure 4.3 shows the flow and stage immediately downstream of the weir. It can be seen that the simulated flow downstream of the unit matches the "recorded flow". The simulated stage, however, no longer matches the recorded stage. The differences between the recorded and simulated stage are due to the backwater effect downstream of the weir or control which this unit represents (for sub-critical flow). The stage immediately downstream of the unit is dependent on the backwater effect of the sections further down the river (for sub-critical flow).

4.1.3 Potential Future Developments to the Real Time Control

Simulated flows which have propagated from upstream are available at the real time control. In calibrating the model these flows are compared with the recorded data at the real time control. Differences in volumes between these data are generally due to unmodelled events, such as local inflow or abstractions from the reach upstream of the control. Differences in the timing of peaks or troughs, with associated differences in the flow at these peaks and troughs indicate that the model is not properly calibrated in terms of the attenuation of flow. The parameter in the ISIS model which is used to calibrate the attenuation of flows is Manning's n, which is defined in the ISIS RIVER units (not between the computational Δx 's). There can be a number of river units, each defining a different n, within a reach upstream of a real time unit.

A potential and useful development to the ISIS model would be to develop a selfcalibration routine which would be based on the continual comparison of the simulated and recorded data at the real time units. This routine would then adjust the Manning's n values in each RIVER unit according to the required percentage change.

This would be particularly useful considering that the conveyance of the river, K changes with different flow regimes. This is evident in the following definitions:

$$K^2 = \frac{A^2 R^{\frac{3}{2}}}{n^2}$$
 and $R = \frac{A}{P}$

where R is the hydraulic radius, P is the length of the wetted perimeter and n is Manning's roughness coefficient and A and P are dependent on flow. Currently n is assumed constant for all modelled flow regimes as suggested by the Manning formula, unless specifically adjusted by the user. This means that the model should be re-calibrated for normal, flood and low flow conditions. The model was only calibrated for low flow conditions in this study.

4.2 ADAPTIVE TIMESTEPPING

There are 2 turbines at Vanderkloof Dam with a combined maximum discharge of between 170 m³/s and 200 m³/s depending on the water level of the dam. The valves which control the flow of water through these turbines can be opened or closed within approximately three minutes. The result is that the discharge from Vanderkloof Dam varies rapidly.

This situation causes instability and non-convergence in the solution of the St Venant equations, unless the timestep is sufficiently short. These very short timesteps resulted in long run times for the simulations, which was wasteful, because once the wave diffuses downstream, a longer time step could be used. There was thus a mismatch in the required precision depending on the distance of the reach from Vanderkloof Dam. It was decided to develop an adaptive timestepping routine as these short time steps were only required during the periods when the releases were changing rapidly, which only occurs approximately four times in 24 hours.

The adaptive timestepping routine enables a relatively long default timestep to be used for the simulation. If, after an increase in model time (timestep), computational instabilities occur, the timestep is reduced and the calculations are repeated until a solution for that point in time is found, where after the timestep is restored to the default and the next timestep is simulated. The timesteps are only shortened as required.

Note that this methodology relies on detecting instabilities due to fast rise times (computationally the generation of surge waves) which occur in spite of the time step satisfying the Courant condition. The instabilities manifest themselves as waves which grow until negative depths and flows are computed.

At present the solutions for the whole model are re-calculated when the timestep is reduced. Theoretically it would be possible to implement adaptive timestepping only in the reach (between 2 hydraulic controls) where the instability occurred. The solutions of the flow equations for that reach would then be calculated on a shorter timestep until the instability is "overcome" and the simulated time for the reach is the same as for the rest of the model.

Even without this additional improvement, it was found that when using the adaptive timestepping routine the times for the simulations of the Orange River were reduced by up to a factor of 5 compared to when the routine was not used.

4.3 SUMMARY

This chapter described the modelling developments made to the ISIS engine so that it could be used to model the Orange River using real time data. The real time stage-time and flow-time units were described and the adaptive time stepping unit was explained.

To this point the theoretical aspects of the study have been discussed. The St Venant equations of flow were derived from the transport theorem (Appendix A) before the different flow routing models were described and evaluated in terms of their applicability to the Orange River (Appendix B). Once the selection of the full hydrodynamic model was justified, the solution of the St Venant equations using a Priesmann 4 point implicit finite difference scheme and the Newton-Raphson method was described (Appendix C). The graphical user interface (GUI) which was developed in this study is described (Chapters 2 and 3). The function of the GUI is to control the flow of data and results between the real time telemetry system, the ISIS hydraulic engine and the users, uniting the various components into the decision support tool. Finally the required developments made to the ISIS modelling engine were discussed in this chapter (Chapter 4).

In the following chapters more detail is given on the real time telemetry network (Chapter 5) and the data input to and calibration of the hydraulic model (Chapter 6). Finally, the decision support tool is assessed (Chapter 7) before final conclusions and recommendations are made (Chapter 8).

5 THE REAL TIME TELEMETRY NETWORK

In 1993 the World Meteorological Organisation (WMO), in association with the World Bank, started to promote a World Hydrological Cycle Observing System (WHYCOS) to enable the development of continuously updated data bases of various hydrological parameters one of which is river flow. The system is based on a global network of reference stations with real-time satellite-based data transmission.

WHYCOS is made up of interconnected regional Hydrological Cycle Observing Systems (HYCOS) sub-components which are managed and supported by the national hydrological authorities in the regions. The national authorities are the custodians of the information which they create. South Africa is included in the Southern African Development Countries (SADC) HYCOS with the Department of Water Affairs and Forestry (DWAF) being in control of all hydrological data in South Africa. One of the main HYCOS components is a network of key stations used for the collection and transmission of several variables related to water resource monitoring. Several stations on the Orange River are included in the HYCOS agreement.

These stations are equipped with multi sensor Data Collection Platforms (DCP's) which transmit data by means of satellite technology. The data are collected and recorded in Germany and then re-transmitted to the Department of Water Affairs and Forestry (DWAF) head office in Pretoria every hour, containing 5 readings for the hour.

The use of cell phone technology has provided another means of data transmission and DWAF has implemented this technology at several sites on the Orange River. The result is that a database of real-time flow conditions is available at the DWAF head offices in Pretoria.

The real-time data which are collected at DWAF head offices are available on the Internet. The data recorded at the real time gauging stations are verified before they are displayed on the internet. The internet data only include the average reading for every hour and are therefore not suitable for the purposes of this model where, given the nature of the releases from Vanderkloof Dam, shorter time intervals are required. However, the original recorded data are available from DWAF and can be e-mailed to any interested parties. The process of data acquisition is illustrated in Figure 5.1. Although the original intention was for the Graphical User Interface to obtain the data via the Internet using FTP, the data are not yet available on the Department of Water

Affairs and Forestry's FTP site. This is mainly due to security reasons as the department's firewalls limit the access of the FTP site.

The stations included in this real-time network are indicated in Figure 5.2 and their details are given in Table 5.1

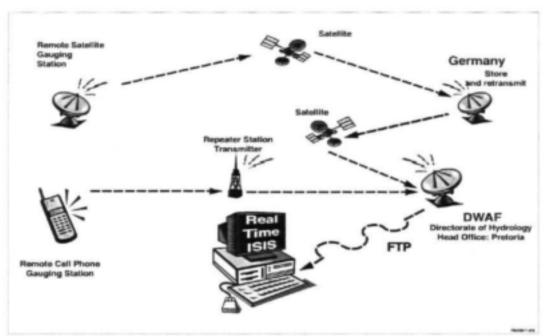


Figure 5.1: The real time telemetry network

Table 5.1:Stations on the Orange River included in the telemetry network

Station name	DWAF Gauge Number	Distance from Vanderkloof Dam (km)	Measured component	Type of transmission	
Vanderkloof Dam	D3H023	0	Flow	Satellite	
Doorenkuilen	D3H012	0.7	Stage	Satellite	
Marksdrift Weir	D3H008	174	Stage	Cellular	
Douglas Weir	C9R001	(Vaal River)	Stage	Cellular	
Katlani	D7H007	190	Stage	Cellular	
Boegoeberg	D7R001	471	Stage	Satellite	
Zeekoebaart	D7H008	473	Stage	Satellite	
Neusberg	D6H014	703	Stage	Cellular	
Vioolsdrift	D8H003	1 097	Stage	Satellite	
Brandkaros	D8H007	1 362	Stage	Satellite	

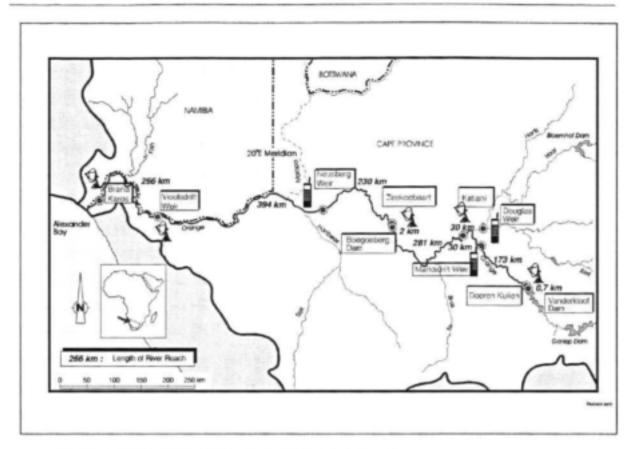
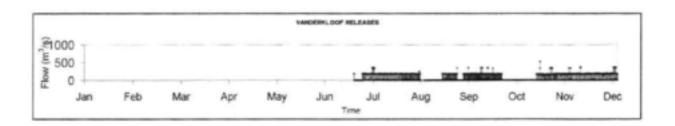



Figure 5.2: Position of real time gauging stations


The real time data which were available for the period 1 Jan 2000 to 1 December 2000 are illustrated in Figure 5.3. It can be seen that there are problems with the data stream and an error check was included in the Graphical User Interface, where a reading is flagged if it differs from the previous reading by more than a user specified amount. The zero readings are also discarded during this checking process.


It is interesting to note that the flows at Katlani are greater than the flows at Marksdrift. This is due to the inflows from the Vaal River.


A further important point to consider is that the releases from Vanderkloof Dam are not included in the network of real time stations. The releases from Vanderkloof Dam used in this study were obtained from records kept by Eskom. Due to the position of the turbines at the dam wall, it is apparently not physically possible to record the releases in real time. For this reason the gauge at Doorenkuilen (it is not a weir) was linked to the network as it is immediately downstream of the dam.



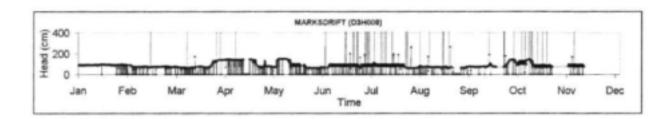

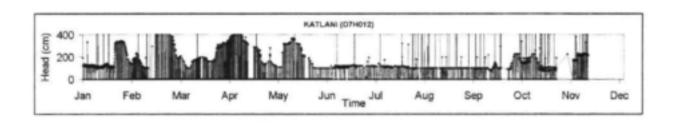

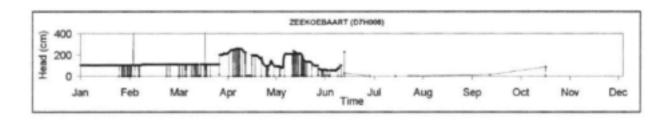

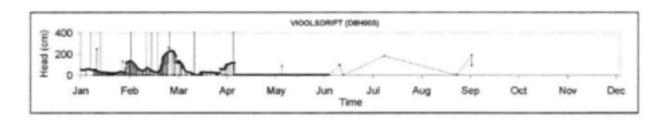

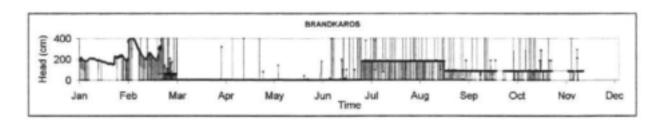


Figure 5.3: Real time data for period 1 January - 1 December 2000

However, there are two problems with utilising the records obtained from Doorenkuilen. Firstly the readings are available only in hourly increments. The exact times that the turbines at Vanderklooof Dam are opened and closed are therefore not recorded. Secondly, there is no record available from the station yet.

Doorenkuilen is not a weir but a gauging site on the river. It was modelled in ISIS as a RIVER section, 100m downstream of Vanderkloof Dam. The modelled stage discharge relationship was extracted from the simulated results and is shown in Figure 5.4. It is clearly evident that the stage-discharge relationship at this site is influenced by the releases from Vanderkloof Dam. As is usual in rapidly varying flows, the stage-discharge relationship differs on the rising and falling limb of the hydrograph. It is therefore of concern that using the recorded stage will not be sufficiently accurate for determining the actual releases.

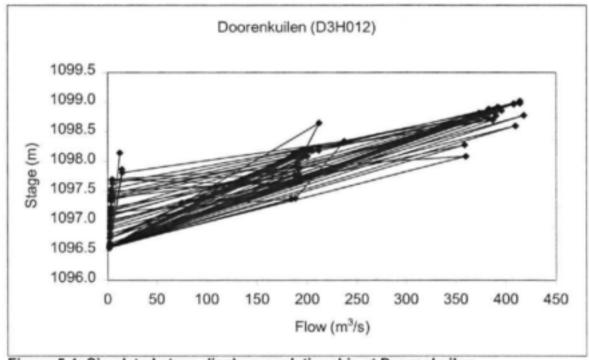


Figure 5.4: Simulated stage discharge relationship at Doorenkuilen

The releases from Vanderkloof Dam are not included in the real time telemetry network. As an alternative it was intended by DWAF that the stage recorded at Doorenkuilen, which is 100m downstream of Vanderkloof Dam, should by used to determine the releases from Vanderkloof Dam. However, to date, Doorenkuilen has not been included in the real time network and as the stage discharge relationship at Doorenkuilen is not linear (due to the rapidly varying flows released from Vanderkloof Dam) it may not be possible to use this station to determine the releases from

Vanderkloof Dam. The releases from Vanderkloof Dam used in this study were obtained directly from ESKOM, but they are not available in real time.

5.1 SUMMARY

This chapter describes the real time telemetry network in operation on the Orange River. Real time data are recorded at several gauging stations on the Orange River and the data is transmitted via satellite to the Department of Water Affairs head office in Pretoria where they are archived.

The data recorded at the real time gauging stations contain 5 readings in every hour. These data are verified before they are displayed on the internet. The internet data only include the average reading for every hour and are therefore not suitable for the purposes of this model where, given the nature of the releases from Vanderkloof Dam, shorter time intervals are required. However, the original recorded data are available from DWAF and can be e-mailed to any interested parties.

There are several problems with the real time data which are discussed in this chapter. These problems include the fact that the data recorded at Katlani cannot be used to record the releases from Vanderkloof Dam and the Vanderkloof releases are not part of the real time telemetry system. Other problems include incomplete records due to faulty transmitters.

Up to this point in the report various aspects of the decision support system have been described:

- The theoretical aspects of modelling open channel flow were discussed, in the Appendices.
- The conceptual aspects of the decision support system and the working of the Graphical User Interface (GUI) were described in Chapters 2 and 3.
- The modifications made to the ISIS hydraulic engine were described in Chapter
- The real time telemetry network of gauging stations was described in this chapter.

The final component of the decision support system, the hydraulic model of the Orange River, is described in detail in the following chapter and its assessment will be made in Chapter 7.

6 THE HYDRAULIC MODEL

This chapter describes the hydraulic model of the Orange River as defined for ISIS. The selection of the mathematical model used for the study is justified in Appendix B. The method used to set up the model and the calibration of the model are discussed in this chapter.

6.1 PREPARATION OF THE HYDRAULIC MODEL

In order to model the river using the full St Venant equations, data describing the river are required. These data include cross sectional information as well as information on the roughness of the river reaches. Information on abstractions from the river and losses from the river are also required.

A considerable amount of the data capturing for the model was done during the Orange River Losses Study (McKenzie and Craig, 1999). This included setting up and calibrating a model of the lower reaches of the Orange River. The cross-sectional data for the remaining portion of the river was captured by a team of BKS (Pty) Ltd employees. This information was combined into one model of the entire length of the Orange River downstream of Vanderkloof Dam, including the detail of the real time stations and calibrating the model against the recorded flow at each of the real time stations.

6.1.1 Cross sectional data

The spacing and resolution of the cross sectional information has an influence on the accuracy of the simulated results. Cross sectional information should be included at the points in the river where flow conditions change, such as at weirs or where large changes in cross section occur. Where the hydraulic properties of the river remain constant, interpolated sections were used in the model. Although these sections contain no new cross sectional data they are included to improve the calculation of the water surface level.

Considering that the section of the river being modelled is 1 400km long, relatively few sections have been physically surveyed. The surveyed information was used where available but in general most of the cross section information was determined from contour maps and aerial photographs.

The drawback of using contour maps and aerial photography is that the shape of the river below the water surface is not known. This information had to be interpolated from the information available above the water surface level and from local changes

to flow which were visible in the aerial photographs. The channel properties were then calibrated by comparing the width of the water surface of the simulated flows to those shown in the aerial photographs which were taken during similar flow conditions.

6.1.2 Channel roughness

Channel roughness was estimated using information obtained from photographs as well as visits to sections of the river. In general, however, the channel roughness, expressed in terms of Manning's equation (Manning's n) was calibrated against recorded flow.

6.1.3 Real Time Units

The real time units include a stage-discharge relationship of the weirs. These relationships were determined by the Department of Water Affairs and Forestry by means of flow gauging exercises and are shown in Figure 6.1.

It can be seen from the charts that for several of the weirs the flow changes considerably for a small change in stage. This is due to the fact that these weirs were not designed for low flow measurements and have wide cross sections. This is a problem as the Orange River is usually operated at relatively low flows, which means that the observed real time flows input into the decision support system are not very accurate. It is strongly recommended that the accuracy of the real time gauges be improved for low flow conditions.

Neusberg Weir is wide enough to require two gauging stations. The stage-discharge relationship for these stations were combined for this study. The initial flows at Neusberg are due to a fish ladder in the weir.

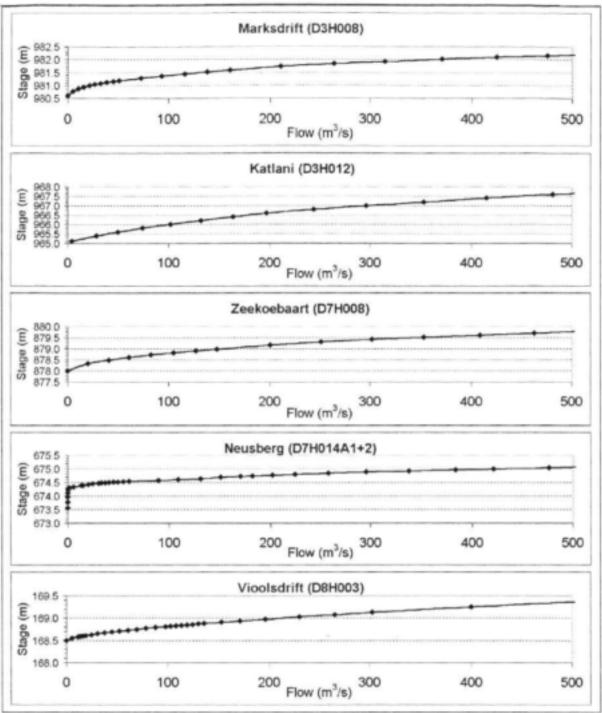


Figure 6.1: Stage-Discharge Relationship for Real Time Gauging Stations

6.1.4 Summary of the physical nature of the Orange River downstream of Vanderkloof Dam

The Orange River downstream of Vanderkloof Dam is divided into a number of reaches by control structures. The physical characteristics of these reaches are listed in Table 6.1 and a longitudinal sections of the river showing the bed level and roughness (Manning's n) are shown in Figure 6.2. The maximum and minimum velocity and Froude numbers are shown in Figure 6.3. (These data correspond with the flows of Figure 6.4).

Table 6.1: Summary of data on the 14 river reaches between control sections

Description	Upstream Control Type	Upstream Chainage (m)	Length (m)	Average Slope 1:x	Average Roughness (n)	No River Sections (measured)	No Inter- mediates (Δx)
Vanderkloof Dam to Marksdrift Weir	Real Flow-Time	0	174400	1469	0.036	6	145
Marksdrift to Vaal River Confluence	Real Flow-Stage	174400	15300	2684	0.032	1	11
Vaal River Confluence to Katlani	Real Flow Time	189700	15000	15	0.038	0	9
Kattani to Boegoeberg Dam	Real Flow-Stage	204700	266300	3201	0.026	4	169
Boegoeberg Dam to Zeekoebaart Weir	Round Nosed Weir	471000	2000	2	0.038	0	5
Zeekoebaart Weir to Gifkloof Weir	Real Flow-Stage	473000	143000	1857	0.038	2	67
Gifkloof Weir to Neusberg Weir	Round Nosed Weir	616000	87000	505	0.052	3	140
Neusberg Weir to Augrabies Falls	Real Flow-Stage	703000	49900	140	0.081	3	93
Augrabies Falls to Stolzenfels Weir	Round Nosed Weir	752900	85300	431	0.045	15	144
Stolzenfels Weir to Orange Falls	Round Nosed Weir	838200	67500	807	0.040	17	200
Orange Falls to Henkries Weir	Round Nosed Weir	905700	140200	1054	0.071	23	233
Henkries Weir to Vioolsdrift Weir	Round Nosed Weir	1045900	50700	1500	0.037	4	67
Vioolsdrift Weir to Fish River Confluence	Real Flow-Stage	1096600	147000	1396	0.038	17	166
Fish River Confluence to Brandkaros	Real Flow Time	1243600	118900	2383	0.037	27	149

It is interesting to note in Figure 6.3 that there are negative minimum values at the upstream end of the model. These are the result of numerical instabilities introduced by the steep hydrographs released from Vanderkloof Dam (computationally the generation of surge waves) which occur in spite of the Courant condition being satisfied by the timestep.

In Figure 6.4 the channel cross sections and weir crests are shown for each of the modelled weirs. Note the difference in the x-axis scale for Gifkloof and Neusberg. Neusberg Weir has two sections, with two gauging stations. In order to model Neusberg Weir as a real time control an equivalent stage-discharge relationship was determined for the combined weir. The crest level for Neusberg shown in Figure 6.3 is for the combined stage-discharge relationship.

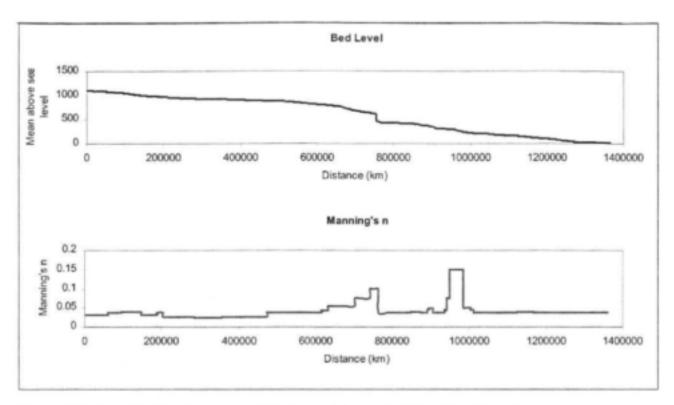


Figure 6.2: Longitudinal section of the river showing bed level and roughness

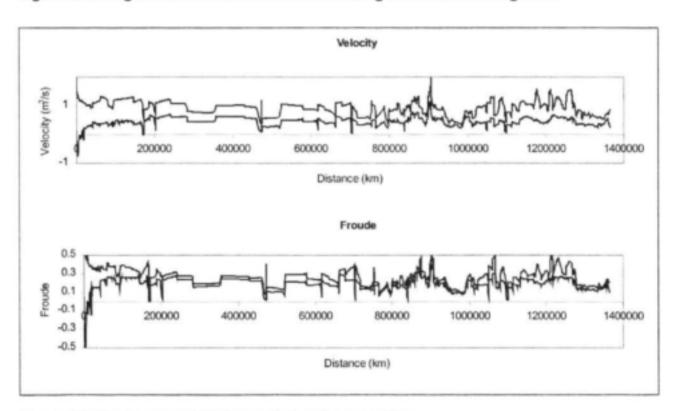


Figure 6.3: Maximum and Minimum Hydraulic properties

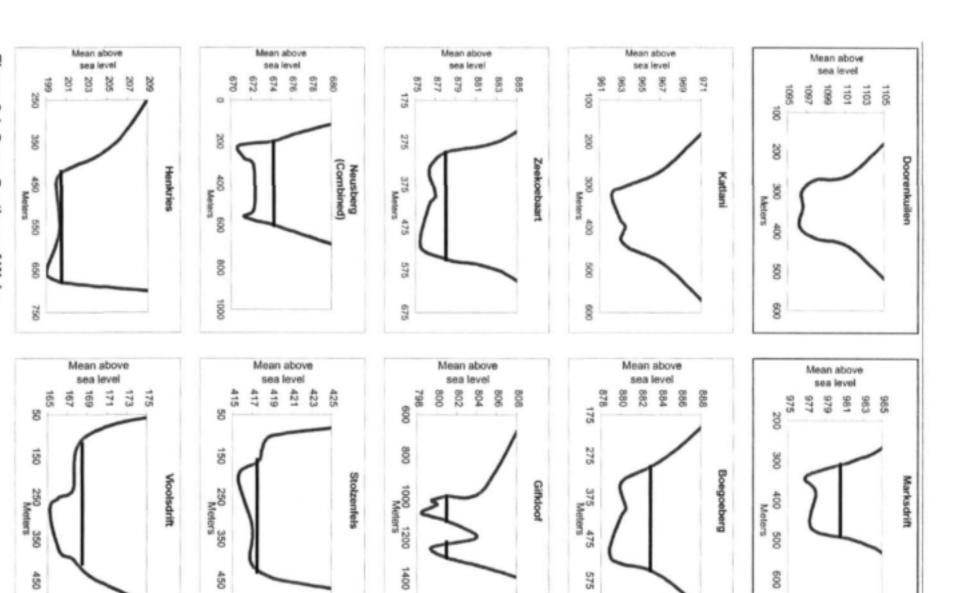


Figure 6.4: Cross Sections of Weirs

6.1.5 Abstractions from the river

Table 6.2: Abstraction quotas from the Orange River 1994-2000 (not actual abstractions)

	Abstraction Quotas from the Orange River (m²/s)										
	Vdk – Marks	Marks- Prieska	Prieska- Boeg	Boeg- Uping	Uping- Neus	Neus- Blou	Blou-20 Deg	20 Deg – Pella		Viools- Fish	Fish- BrandK
1 Jan	6.15	3.58	11.55	8.41	11.34	3.58	0.30	1.23	1.49	0.85	0.15
15 Jan	8.32	4.46	11.75	8.43	11.00	3.24	0.28	1.23	1.14	0.20	0.16
1 Feb	7.36	4.14	11.22	7.97	10.16	2.89	0.26	1.20	1.12	0.27	0.16
15 Feb	6.39	3.82	10.69	7.51	9.31	2.54	0.23	1.17	1.09	0.74	0.17
1 Mar	4.97	2.87	8.52	5.77	6.96	1.80	0.18	0.93	0.98	0.65	0.15
15 Mar	3.55	1.92	6.34	4.03	4.61	1.05	0.14	0.70	0.87	0.56	0.13
1 Apr	2.15	1.31	4.40	2.77	3.21	0.82	0.11	0.53	0.78	0.45	0.12
15 Apr	0.74	0.71	2.45	1.51	1.81	0.58	0.09	0.36	0.70	0.34	0.10
1 May	0.36	0.44	1.88	1.38	1.58	0.54	0.07	0.34	0.59	0.20	0.09
15 May	0.02	0.18	1.31	1.25	1.34	0.49	0.06	0.33	0.48	0.06	0.09
1 Jun	0.19	0.19	1.08	1.13	1.23	0.53	0.05	0.32	0.44	0.11	0.09
15 Jun	0.39	0.20	0.85	1.01	1.12	0.57	0.05	0.31	0.40	0.16	0.09
1 Jul	0.96	0.52	1.22	1.35	1.46	0.60	0.05	0.34	0.41	0.19	0.09
15 Jul	1.52	0.84	1.59	1.69	1.79	0.63	0.05	0.37	0.41	0.22	0.10
1 Aug	2.28	1.32	2.31	2.23	2.60	1.02	0.06	0.46	0.47	0.28	0.10
15 Aug	3.04	1.80	3.03	2.76	3.41	1.41	0.10	0.54	0.52	0.33	0.11
1 Sep	5.51	2.73	4.50	3.86	5.11	2.11	0.16	0.71	0.79	1.00	0.12
15 Sep	7.99	3.67	5.97	4.95	6.81	2.81	0.21	0.87	1.07	1.68	0.13
1 Oct	9.04	4.05	7.33	5.87	7.99	3.10	0.24	1.01	1.22	1.69	0.14
15 Oct	10.09	4.42	8.69	6.79	9.16	3.39	0.26	1.14	1.38	1.70	0.14
1 Nov	9.78	4.56	9.90	7.60	10.38	3.80	0.30	1.24	1.59	2.03	0.15
15 Nov	9.48	4.69	11.11	8.41	11.59	4.22	0.33	1.34	1.80	2.35	0.15
1 Dec	6.73	3.70	11.23	8.41	11.63	4.08	0.32	1.29	1.82	2.12	0.14
15 Dec	3.97	2.71	11.35	8.40	11.67	3.93	0.32	1.24	1.84	1.90	0.13
Total (Mm²/a)	143.82	76.26	194.73	147.07	190.88	64.43	5.50	24.88	30.36	26.02	3.9

During the course of various studies considerable work has been done to determine the demands from and the return flows to the Orange River. The information used for this study was taken from the Hydropower Operating Analysis which is carried out annually for DWAF. The abstractions quotas are tabulated above.

It should be noted that these are theoretical values which may be abstracted. The amounts which are actually abstracted differ according to the weather and crop requirements. The abstractions quotas from the river have been constant for several years. The modelled abstractions were identical for the 1994 and 2000 simulations.

6.1.6 River Losses

An evaporation module was developed for the ISIS software as part of the Orange River Losses Study (McKenzie and Craig, 1999). This model calculated and modelled diffuse evaporation based on the simulated surface area of the river. During the course of that study it was found that the simulations using the evaporation module did not differ significantly from the simulations where evaporation was modelled as discrete abstractions from the river. The evaporation module was therefore not included in the real time model and instead the losses were modelled as discrete demands abstracted from the lower end of the river reaches. The quantities which were abstracted were obtained from the results of the Orange River Losses Study and are tabulated below.

Table 6.3: Losses from the Orange River (averages for the year)

Date	Vdk- Marks	Marks- Prieska	Prieska- Boeg	Boeg- Uping	Uping- Neus	Neus- Blou	Blou-20 Deg	20 Deg- Viools	Viools- Fish	Fish- Brand
1 Jan		4.17			2.60	1.92		7.15	1.89	
15 Jan	3.07	4.11	2.55	4.55	2.60	1.93	3.46	7.25	1.94	1.58
1 Feb	2.63	3.55	2.23	4.04	2.34	1.79	3.19	6.84	1.87	1.52
15 Feb	2.19	2.99	1.91	3.54	2.08	1.64	2.92	6.43	1.80	1.47
1 Mar	1.80	2.47	1.61	3.02	1.77	1.43	2.54	5.68	1.61	1.33
15 Mar	1.40	1.95	1.30	2.50	1.46	1.22	2.17	4.92	1.42	1.18
1 Apr	1.18	1.69	1.09	2.11	1.23	1.03	1.85	4.17	1.21	1.01
15 Apr	0.95	1.44	0.89	1.72	1.01	0.85	1.52	3.41	0.99	0.85
1 May	0.88	1.29	0.79	1.51	0.87	0.74	1.32	2.91	0.84	0.71
15 May	0.81	1.15	0.70	1.30	0.72	0.62	1.11	2.42	0.69	0.57
1 Jun	0.72	1.02	0.61	1.15	0.64	0.54	0.96	2.09	0.59	0.49
15 Jun	0.62	0.89	0.53	0.99	0.55	0.46	0.83	1.75	0.49	0.41
1 Jul	0.68	0.95	0.57	1.06	0.58	0.48	0.86	1.81	0.50	0.42
15 Jul	0.74	1.02	0.61	1.12	0.62	0.50	0.90	1.87	0.51	0.43
1 Aug	0.95	1.30	0.77	1.41	0.78	0.62	1.11	2.30	0.62	0.51
15 Aug	1.17	1.57	0.93	1.71	0.94	0.74	1.32	2.73	0.73	0.60
1 Sep	1.55	2.04	1.21	2.19	1.21	0.93	1.65	3.43	0.92	0.75
15 Sep	1.93	2.51	1.49	2.67	1.49	1.12	1.99	4.13	1.11	0.90
1 Oct	2.17	2.85	1.70	3.06	1.72	1.28	2.29	4.72	1.26	1.02
15 Oct	2.40	3.19	1.91	3.45	1.96	1.44	2.59	5.30	1.41	1.14
1 Nov	2.67	3.58	2.18	3.92	2.21	1.62	2.90	5.99	1.59	1.33
15 Nov	2.93	3.96	2.45	4.38	2.46	1.79	3.21	6.68	1.77	1.53
1 Dec	3.03	4.09	2.52	4.49	2.53	1.85	3.29	6.86	1.80	1.55
15 Dec	3.14	4.23	2.59	4.60	2.60	1.90	3.40	7.04	1.84	1.58
otal (Mm³/a)	59.33	80.59	49.59	90.22	51.24	39.33	70.25	149.05	40.55	33.72

6.1.7 Calibration of the model

Due to the lack of more recent data the hydraulic model was calibrated against flows recorded in 1994. The first parameter which was calibrated was the Manning's roughness, which affects the attenuation of flow in the river. The average values finally adopted appear in Table 6.1.

The model was also calibrated in terms of numerical diffusion which is introduced during the solution of the St Venant equations. The parameters which can be adjusted are the alpha and theta values. Alpha is the under relaxation factor which is

used to accelerate convergence between timesteps (Appendix C.1.3). The theta value is the weighting factor used in the Priessman Box method and represents the importance of the previous timestep in the solution of the following timestep. Although Manning's n can be set and therefore calibrated for every cross section in the river the alpha and theta values are applied to the whole river.

In order to calibrate the model in terms of Manning's n, it was necessary to compare the simulated flows to the recorded flows for each of the gauging stations. By introducing the real time recorded data at each of the gauging stations errors in the calibration of the reach upstream of the gauge are not propagated further downstream. In other words the use of the real time unit allows each section of river (between gauging stations) to be calibrated independently of the other sections, while the river is simulated as a whole. If the real time unit were not used it would have been necessary to simulate each section of the river between gauging stations separately.

Each section of the river between gauging stations is made up of a number of RIVER units (Table 6.1 and Figure 6.2) each with a corresponding Mannings n value. It was therefore necessary to adjust all of the Manning's n values between the gauging stations by an appropriate factor, estimated by comparing the simulated and recorded data at the downstream gauge. In this way the relative relationship of Mannings n values for the various reaches is maintained.

Once the basic calibration values were established for the model a closer look at the simulated results was necessary.

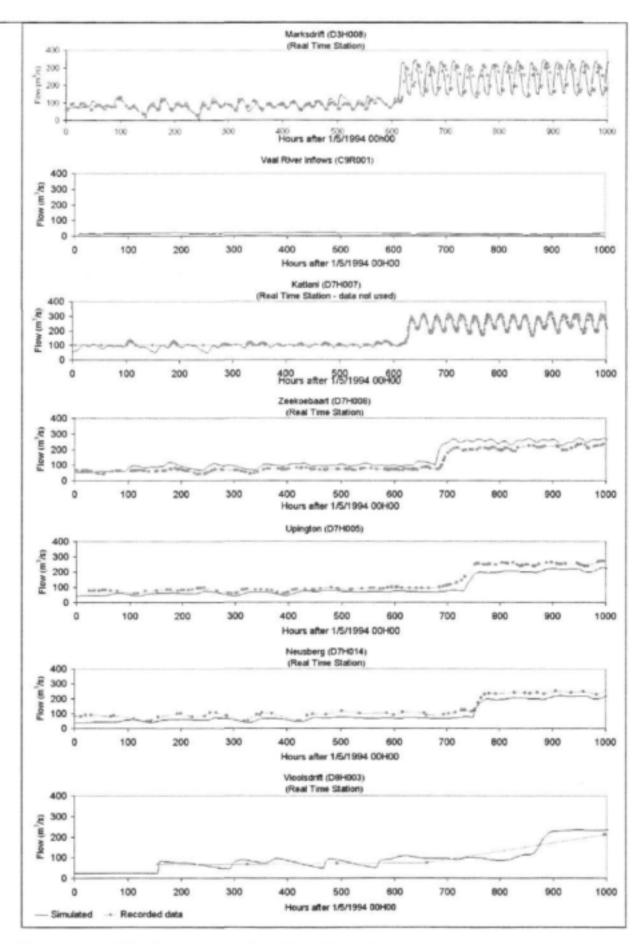


Figure 6.5: Calibration results using all real time data

The results of the first of these simulations are given in Figure 6.5. In this simulation the recorded data were used at all of the real time stations (Marksdrift, Zeekoebaart, Neusberg and Vioolsdrift). As Katlani is not a weir, it could not be used as a real time control in the simulation. The Vaal River inflows which were introduced were those recorded at Douglas Weir. The recorded flows at Upington were not propagated downstream using the real time module because Upington is not included in the real time network of gauging stations. The Upington flows were only used for comparative purposes to assess the accuracy of the model. The simulation started on 1 May 1994 and continued for 1000 hours. The simulated results were assessed for each reach of the river.

The attenuation of the simulated and recorded results differs at Marksdrift Weir. This indicated that Mannings roughness should be increased. There was obviously an error in the recorded flows at Katlani below 100 m³/s. The simulated flows at Zeekoebaart exceeded the recorded flows by approximately 50m³/s on average.

At Upington and Neusberg Weir the recorded flows exceeded the simulated flows by approximately 50m³/s. The data at Vioolsdrift Weir were considered to be too sparse to be used and no conclusion regarding the calibration of the river below Neusberg Weir could be made.

The errors in the simulation at Zeekoebaart, Upington and Neusberg were of concern. The magnitude of the error far exceeds the combined effect of abstractions and losses from the river in the month of May (See Tables 6.2 and 6.3). From Figure 6.1 it can be seen that a change in stage (which is what is actually recorded and input to the model) of less than 2 cm results in a difference in flow between 200m³/s to 250m³/s at Zeekoebaart. It was therefore concluded that the data recorded at Zeekoebaart Weir were inaccurate, being too low. Propagating these incorrect low flows down the river resulted in the simulated flows at Upington being too low. As Upington is not a real time station no recorded flows at Upington were propagated to Neusberg and incorrect data at Zeekoebaart also caused the simulated flows at Neusberg to be less than the recorded flows.

In order to test this conclusion a second simulation was conducted without any recorded data being included at Zeekoebaart Weir. Instead the simulated flows at Zeekoebaart were propagated downstream as far as Neusberg Weir. The recorded data at Zeekoebaart were only used in Figures 6.6 for comparative purposes. Note the increased simulation time to 2000 hours. From the results given in Figure 6.6 it

can be seen that the magnitude of the flows at Upington and Neusberg Weir are acceptable, if the real time data at Zeekoebaart Weir are not used. The increase in Manning's roughness between Marksdrift and Neusberg Weirs for this simulation improved the flow attenuation upstream of Neusberg Weir.

Once the real time model had been calibrated it was necessary to check that the calibration was still acceptable if no real time data were included. This was performed to ensure that the forecast simulations would produce accurate results. The results of this simulation are given in Figure 6.7.

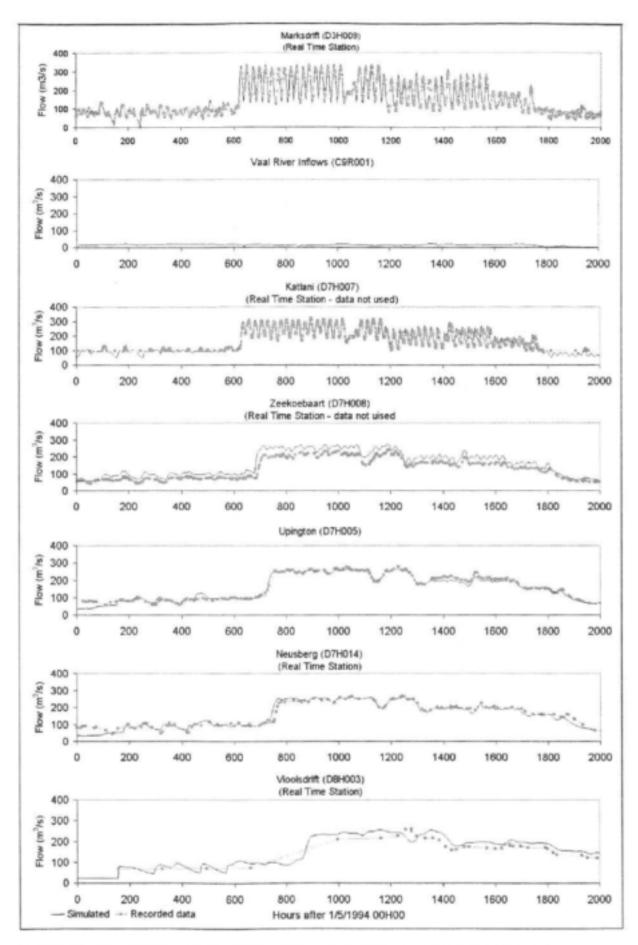


Figure 6.6: Calibration results: No real time data at Zeekoebaart, n increased

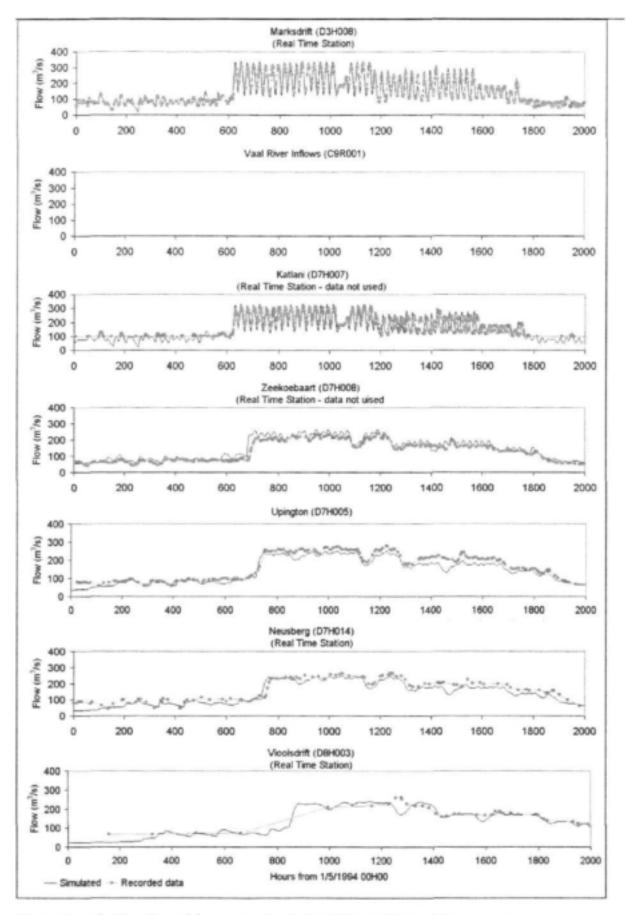


Figure 6.7: Calibration of forecast simulation: No real time data

6.2 SUMMARY

The physical characteristics of the river downstream of Vanderkloof Dam are described in terms of the ISIS hydraulic model. The procedure used to prepare the model is described and the abstractions and losses from the river are also discussed.

The process used to calibrate the model using the real time recorded data is discussed. During the calibration process it became evident that the accuracy of the real time recorded data at Zeekoebaart Weir was questionable. The detrimental effect of including inaccurate data in the real time model is clearly indicated in this chapter.

Once the real time model was calibrated against recorded data (excluding the inaccurate data at Zeekoebaart Weir) the calibration was checked for the forecast simulations, when no real time data were included in the simulations.

The various aspects of the decision support model have now been described. The process used to assesses the effectiveness of the decision support model is described in the following chapter.

7 ASSESSMENT OF THE DECISION SUPPORT TOOL

The decision support tool was assessed in regard to two aspects. Firstly, the use of the real time model to update the simulated flow conditions on the river (thereby increasing the accuracy of the forecast simulations) was investigated. Secondly, a rough estimate was made of the savings in water that could be gained by using the model to determine flow releases.

7.1 THE EFFECT OF THE REAL TIME MODEL ON THE FORECAST SIMULATIONS

The aim of this exercise was to determine whether the real time modelling made a meaningful improvement to the accuracy of the forecast simulations. The real time model was run over a period of time and at several intervals the conditions on the river were saved and used as the initial conditions for forecast simulations. The results of these forecast simulations were then compared to each other and to the actual flows which were recorded on the river.

In Figure 7.1 the results of several of these simulations are compared. Once again the simulations were conducted using historical data due to the lack of up-to-date recorded information. The period of the simulation was 20 June 1994 to 5 July 1994. The period was chosen in winter which is when the low flows occur in the river and when the model would be of most use.

Due to the inaccuracies of the flows recorded at Zeekoebaart Weir this station was not used as a real time control in the real time simulations (See Chapter 6). The recorded data for Zeekoebaart Weir were not propagated downstream in the real time simulation.

In Figure 7.1 the solid red line represents the results of the real time simulation for 1 May to 5 July. The real time data for the full period were included in this simulation. (Only the results from 20 June are shown). Initial conditions for forecasting runs were produced from the real time simulation on 20 June 00h00, 24 June 00h00 and the 28 June 00h00. These initial conditions were used to start 3 forecast simulations on each of these dates. The forecast simulations continued up until 5 July 1994.

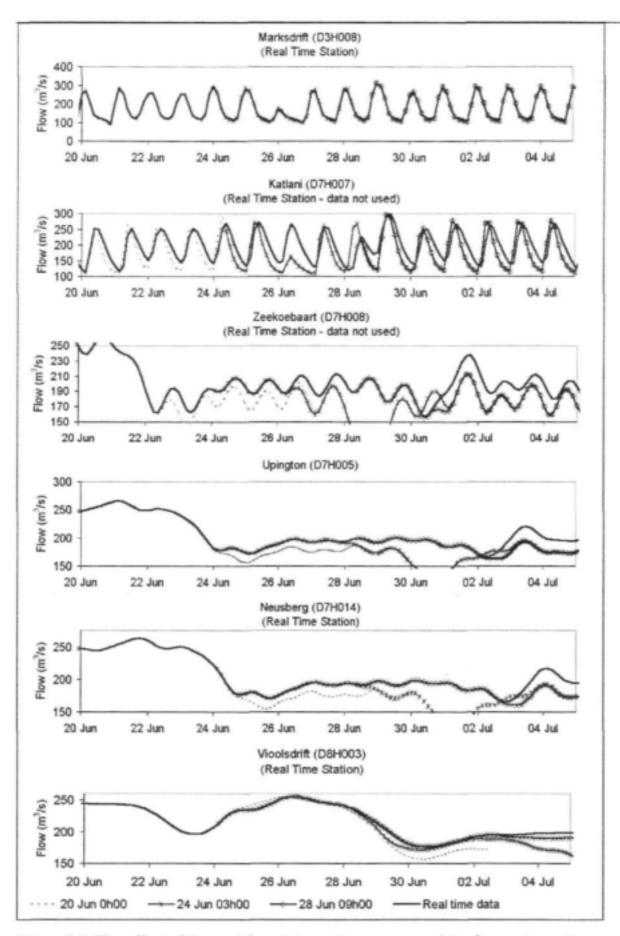


Figure 7.1: The effect of the real time data on the accuracy of the forecast results

The results of the forecast and real time simulations are compared in Figure 7.1. (Note the differences in scale for each set of results.) It can be seen that it takes some time for the flows of the forecast simulation to differ from those of the real time simulation. This is due to the fact that the real time results were used as the initial conditions for every computational node of the model for the forecast simulations. The time taken for the forecast simulation to differ from the real time results is equal to the time it takes for the flow to propagate from just downstream of one real time station to the next real time station. For example consider the flows at Neusberg Weir. The forecast simulation started on the 20 June (dashed red), but the simulated flows only differ from those of the real time simulation after 24 June. Likewise, the simulation which started on the 24 June only differs from the real time simulation after 28 June.

Due to the fact that it takes some time for these flows to differ from the actual flows it can be concluded that the forecast simulations do produce more accurate results if the results of the real time simulation are used for the initial conditions of the forecast simulations.

7.2 ESTIMATE OF SAVINGS IN WATER DUE TO THE DECISION SUPPORT TOOL

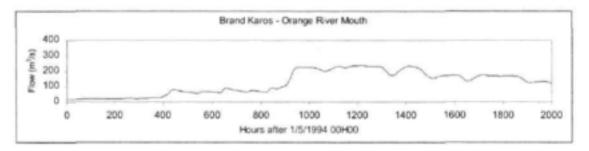


Figure 7.2: Simulated flow at the Orange River mouth

The simulated flow at the Orange River mouth is given in Figure 7.2. The average flow for the full period shown is 125 m³/s. The average flow for the second half of the period is 186m³/s. The actual environmental demand at the river mouth varies between 6.25m³/s and 9.33m³/s depending on the season and drought conditions. Comparing these flows to the required flows it can be seen that the savings in water could be substantial.

It should however be noted that the releases were made to generate hydro-power at Vanderkloof Dam, not to ensure that the minimum required flow was met at the mouth. The comparison is therefore only a very rough estimate of savings that could be made.

7.3 SUMMARY

The decision support tool was assessed in regard to two aspects. Firstly the use of the real time model to update the simulated flow conditions on the river (thereby increasing the accuracy of the forecast simulations) was investigated. Secondly, a rough estimate was made of the savings in water that could be gained by using the model to determine flow releases.

The real time model was run over a period of time and at several intervals the conditions on the river were saved and used as the initial conditions for forecast simulations. The results of these forecast simulations were then compared to each other and to the actual flows which were recorded on the river. When using the results of the real time simulation as the initial conditions for the forecast simulation, it was found that there was an improvement in the level of accuracy of the forecast flows.

The savings in water for the period of May to July 1994, which could have been made had the decision support system been used, was estimated as being in the order of 100m³/s. It should however be noted that the releases were made to generate hydropower at Vanderkloof Dam, not to ensure that the minimum required flow was met at the mouth. The comparison is therefore only a very rough estimate of savings that could be made.

8 CONCLUSIONS AND RECOMMENDATIONS

In this study a decision support tool for the operation of the Orange River downstream of Vanderkloof Dam was developed by the author. This tool is based on a hydraulic model of the Orange River and enables the decision makers to evaluate the effects of proposed release scenarios from Vanderkloof Dam before they are made.

Several potential challenges in accurately modelling the Orange River downstream of Vanderkloof Dam were identified:

- The length of the river is 1400km.
- Due to the remote terrain through which the river flows the abstractions from the river are not recorded in real time and it is not possible to include accurate abstraction data in the river model
- · The return flows from irrigation along the river are also uncertain
- Losses from the river are also significant. Evaporation losses depend on the surface area of the water and therefore the local flow conditions.
- Inflows from tributaries are not recorded in real time.

In order to overcome these difficulties and improve the modelled results, a real time hydraulic model of the river was developed as part of the decision support system. Real time stage and discharge data are recorded at several sites on the Orange River. These recorded data are incorporated into the real time hydraulic model thereby correcting the simulated flows to the actual flow conditions recorded on the river. The initial conditions for the forecast simulations, when the proposed releases are to be assessed, are obtained from the results of the real time model and are therefore a best estimate of the actual flow conditions on the river.

In order to develop the decision support tool, several tasks were completed:

- The theory of open channel flow was studied. This included understanding the derivation of the St Venant equations of flow from Reynolds Transport Theorem and understanding the differences between the various lumped flow routing and distributed flow routing models, so that the correct choice could be made for the model of Orange River. In order to understand the design the real time unit and the adaptive timestepping routine the solution of the St Venant equations were also studied.
- Next the required developments were designed and the changes were made to the hydraulic modelling package (by Dr C Whitlow). The real time hydraulic unit is a novelty in river modelling and was developed and tested as part of this project.

This unit forces the simulated values in the model to match the actual stage and flow conditions recorded at several points on the river, thereby improving the accuracy of the model. The adaptive timestepping routine allows a relatively long timestep to be used for the simulation. If instabilities occur the timestep is reduced until a solution is found, or the minimum timestep is reached. The longer timestep results in shorter computational times. This unit is now available in the commercial releases of ISIS.

- · The adaptive timestepping routine and real time unit were tested
- The decision support system as described in Chapter 2 was conceptualised and designed. The system is made up of three components: A real time model of the Orange River, which allows the simulations of the river to be continuously updated to the real time data recorded conditions on the river, so that a best estimate of actual flow and stage will be available at every computational node of the model. Once the real time model has been updated with the most recent data, the second component, the forecast model simulates the scheduled releases from Vanderkloof Dam, giving a best estimate of future conditions on the river. The third component can be used to simulate any proposed release scenarios, so that it can be determined whether they meet the required downstream flow requirements.
- The graphical user interface (GUI) as described in Chapter 3 was designed coded and tested. The graphical user interface controls the flow of data and results between the various components of the decision support system and between the decision support system and the user.
- The hydraulic model downstream of Vanderkloof Dam was populated.
- The hydraulic model was successfully calibrated against recorded flow. During
 this process the integrity of the real time recorded data was also assessed. From
 the results of the simulation it was concluded that the data recorded at
 Zeekoebaart Weir were inaccurate.
- Finally the functionality of the decision support system was tested and the affect
 of the real time model on the forecast simulations was assessed.

The strategy determined in this study will provide a rational basis for the operators of Vanderkloof Dam to determine a discharge release pattern to ensure that the various demands downstream of Vanderkloof Dam are satisfied. As the model is based on sound hydraulic principles rather than simplified routing methods the users can be confident in the simulated results, provided that the real time data are accurate and available. The use of real time data further improves the simulation as unmodelled events such as localised inflows and abstractions can be catered for and their influence incorporated, even though they are not measured.

One shortcoming of the project is that although the methodology has been developed and tested on historical data it has not been possible, to date, to test the process sufficiently on real time data. This is due to the lack of available accurate real time data.

Secondly, although the system was developed to run in real time the recorded data is not available in real time. The "real time" simulation is therefore updated only when this data becomes available.

Having completed the study the following recommendations can be made:

- The acquisition of real time data from the Orange River be improved. The real time telemetry network must be well maintained so that accurate and up to date information is available.
- It is recommended that the real time data are made available on an FTP site, so that the data do not have to be e-mailed to interested parties. Alternatively the full set of information should be made available on the website. At present only the average readings for every hour are included.
- It is also strongly recommended that the releases from Vanderkloof Dam are made available in real time. This will require co-operation between Eskom and the Department of Water Affairs and Forestry.
- The inaccuracy in the data recorded at Zeekoebaart be investigated further and corrected. In general the accuracy of the gaugings at low flows should be improved.

9 REFERENCES

- BKS (Pty) Ltd 1995: Orange River Development Project Replanning Study: Hydrology and system analysis - Orange River Basin. Report number PD 00/00/4697, Department of Water Affairs and Forestry, Pretoria,
- BKS (Pty) Ltd 1997.Orange River system analysis: Refinement of hydro power operating rules. Report Number P573301, ESKOM Hydro and Water Department, Johannesburg, SA.
- Chow, V.T, Maidment, D.R & Mays, L.W, 1998. Applied Hydrology. McGraw-Hill International editions.
- Fair, K.A., McKenzie, R.S. & Criag, 1998 A.R.. Using real time data and a flow prediction model to assist in the operation in the Orange River. The International Conference on Early Warning Systems for the reduction of natural disasters, Potsdam, Germany.
- Fread, D.L, 1985. Channel Routing. John Wiley and Sons Ltd.
- HALCROW & HR Wallingford 1995. ISIS Flow User manual. Internal copyright publication.
- McKenzie, R.S & Roth, C, 1994. Evaluation of river losses from the Orange River downstream of PK Le Roux Dam. WRC report no 510/1/94.
- McKenzie, R.S & Craig, A.R 1997. Evaporation Losses from South African Rivers. 8th South African National Hydrology Symposium, Pretoria, South Africa.
- McKenzie, R.S & Craig, A.R 1997 The application of hydraulic modelling in calculating evaporation losses from South African Rivers.3rd International conference on river flood hydraulics, Stellenbosch, South Africa.
- McKenzie, R.S & Craig, A.R, 1999. Evaporation Losses from South African Rivers. Report to the WRC.
- McKenzie, R.S, Stoffberg, F.A and Little, P.R, 1998. An overview of the Orange River Replanning Study. Civil Engineering, Vol 6 no 1, January 1998.
- Papastylianos, S. 1997. A comparison of river flow simulations. Department of Civil Engineering, University of Natal.
- Rossouw, J.D. 1997. Orange River Development Project Replanning Study: Water demands of the Orange River Basin. Report P D000/00/4497 to DWAF by BKS Pty Ltd.
- Schäfer, N.W, 1992. ORSA: Demands and return flows. DWAF report no PD000/00/0492 by BKS Inc.
- Whitlow C.D, McKenzie R.S and Fair, K.A, 1998. Application of Internet Technology in a real time hydraulic model of the Orange River. Hydroinformatics conference, Copenhagen.

OPERATIONAL MODEL OF THE ORANGE RIVER

APPENDICES - TABLE OF CONTENTS

		·	age
Α	THE	ORETICAL BACKGROUND	A-1
	A.1	REYNOLDS TRANSPORT THEOREM	. A-1
	A.2	THE ST VENANT EQUATIONS	. A-4
	A.3	SUMMARY	. A-9
В	HYD	RAULIC MODELS	B-1
	B.1	LUMPED FLOW ROUTING	.B-1
		B.1.1 Level Pool Routing	B-1
		B.1.2 The Muskingum Method	B-2
		B.1.3 The linear reservoir model	B-2
	B.2	DISTRIBUTED FLOW ROUTING	.B-4
		B.2.1 The kinematic wave model	B-6
		B.2.2 The Diffusion Wave model	B-7
		B.2.3 The dynamic flow model	B-7
	B.3	SELECTION OF A MODEL FOR THE ORANGE RIVER	.B-7
		B.3.1 Lumped Flow Routing Models	B-8
		B.3.2 Kinematic Wave Model	B-9
	<u>B.4</u>	SUMMARY	B-11
C	SOL	UTION OF THE ST VENANT'S EQUATIONS	C-1
	C.1	FINITE DIFFERENCE SCHEMES	.C-1
		C.1.1 Solution of finite difference schemes	C-2
		C.1.2 The Explicit Scheme	C-3
		C.1.3 The implicit scheme	C-4
	C.2	SOLVING THE ST VENANT EQUATIONS	.C-6
		C.2.1 Boundary Conditions	C-9
		C.2.2 Initial Conditions	C-10
		C.2.3 Newton-Raphson: A solution to the St Venant's equations	C-11
	C.3	SUMMARY	C-16

DISCLAIMER

Much of the information included in the appendices is based on work published in *Applied Hydrology*, Chow Maidment and Main, 1998.

A THEORETICAL BACKGROUND

Before attempting to develop the real time unit for the hydraulic modelling software, the theoretical background to open channel flow was researched. In this appendix the St Venant equations of flow are derived using the Reynolds' transport theorem. This material is adapted from Chow et al (1998).

A.1 REYNOLDS TRANSPORT THEOREM

The Reynolds transport theorem states:

The total rate of change of an extensive property of fluid is equal to the rate of change of the extensive property stored in the control volume plus the net outflow of the extensive property through the control surface.

In the Reynolds transport theorem, the physical laws which are usually applied to discrete masses are adapted to apply to fluid flowing continuously through a control volume. Two types of fluid properties are defined for the Reynolds transport theorem:

- Intensive properties, which are independent of the mass present in the control volume
- Extensive properties, which are dependent on the mass present in the control volume

For any extensive property B there is a corresponding intensive property β which is defined as the quantity of B per unit mass of fluid:

$$\beta = \frac{dB}{dm} \tag{A.1}$$

The extensive and intensive properties can be scalar or vector properties, depending on the definition of the property under consideration.

The Reynolds transport theorem is based on the time rate of change of a property and the amount of that property flowing out of the control volume. Consider Figure A.1. The control volume is depicted by the shaded area and is bounded by the solid lines. The fluid flows through this fixed control volume from left to right. After a small time interval Δt the fluid occupies the space indicated by the dashed lines. We can therefore identify three regions:

- Region I, which is occupied at time t but not at time t+∆t
- Region II, which is occupied at time t and t+∆t
- Region III which is occupied only at time t+∆t

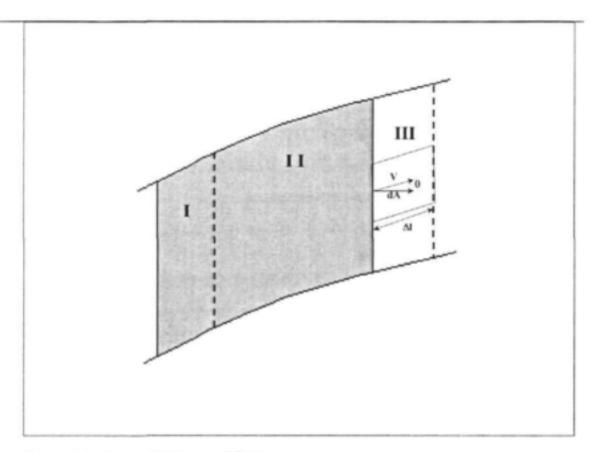


Figure A.1: Control Volume of fluid

Within the control volume the volume of fluid is $d \forall$. If the density of the fluid is ρ , then the mass of the element is $dm = \rho d \forall$. The amount of extensive property B in the fluid element is $dB = \beta dm = \beta \rho d \forall$. The total amount of any extensive property is the integral of the elements in the total volume:

$$B = \iiint \beta \rho d \forall \qquad (A.2)$$

where III is the integral over the volume.

For the shaded control volume originally in the control volume the time rate of change of the extensive property is:

$$\frac{dB}{dt} = \lim_{\Delta t \to 0} \frac{t}{\Delta t} \left[\left(B_{N} + B_{M} \right)_{t+\Delta t} - \left(B_{I} + B_{N} \right)_{t} \right]$$

$$\frac{dB}{dt} = \lim_{\Delta t \to 0} \frac{t}{\Delta t} \left[\left(B_{N_{t}} \right)_{t+\Delta t} - \left(B_{N} \right)_{t} + \left(B_{M} \right)_{t+\Delta t} - \left(B_{I} \right)_{t} \right]$$
(A.3)

As Δt approaches 0 region II becomes the control volume, therefore

$$\lim_{\Delta t \to 0} \frac{t}{\Delta t} \left[\left(B_{R_t} \right)_{t+\Delta t} - \left(B_{H} \right)_{t} \right] = \frac{d}{dt} \iiint \beta \rho dV \qquad (A.4)$$

 $\lim_{\Delta t \to 0} \frac{1}{\Delta t} \left[\left(B_{III} \right)_{t+\Delta t} - \left(B_{I} \right)_{t} \right]$ represents the flow of the extensive property carried by the fluid across the control surface.

Figure A.1 shows a close up of the outflow from the control volume into region III. An element in the area through which the fluid flows is represented by dA. The volume of water which flows through dA in time Δt is $d \not\vdash$. The length of this tube is represented by Δl , with $\Delta l = V\Delta t$, where V is the velocity of the fluid. The volume of the fluid is therefore $d \not\vdash = \Delta l cos \partial dA$, where θ is the angle between the direction perpendicular to the outflow surface and the velocity vector \mathbf{V} . The total amount of extensive property in Region III can be found by integrating over the area. Therefore:

$$\lim_{\Delta t \to 0} \frac{1}{\Delta t} \left[\left(B_{t} \right)_{t+\Delta t} \right] = \lim_{\Delta t \to 0} \frac{1}{\Delta t} \iint_{M} \beta \rho \Delta I \cos \theta dA \qquad (A.5)$$

where the double integral represents the integral over the surface dA.

As Δt approaches 0, $\Delta l/\Delta t$ approaches the magnitude of the velocity V. Let the vector dA be the vector with magnitude dA and direction normal to the area dA, pointing out of the control volume. Then the term Vcos θ dA is the vector dot product V-dA. Equation A.5 can then be re-written as:

$$\lim_{M\to 0} \frac{1}{\Delta t} [(B_M)_{t+\Delta t}] = \iint_M \beta \rho \mathbf{V} \cdot d\mathbf{A}$$
 (A.6)

Similarly it may be determined that

$$\lim_{M\to 0} \frac{1}{\Delta t} [(B_t)_t] = \lim_{M\to 0} \frac{1}{\Delta t} \iint \beta \rho \Delta I \cos(180 - \theta) dA$$

$$= -\iint \beta \rho \mathbf{V} \cdot d\mathbf{A}$$
(A.7)

Substituting equations A.5 to A.7 into A.3 gives

$$\frac{dB}{dt} = \frac{d}{dt} \iiint_{\infty} \beta \rho d \forall + \iint_{M} \beta \rho \mathbf{V} \cdot d\mathbf{A} + \iint_{M} \beta \rho \mathbf{V} \cdot d\mathbf{A}$$
 (A.8)

It should be noted that for fluid entering the control volume, the angle between the velocity vector pointing into the control volume and the area vector pointing out of the control volume, is in the range $90^{\circ} \le \theta \le 270^{\circ}$ for which $\cos\theta$ is negative. Therefore **V·dA** is always negative for inflow. Similarly **V·dA** is always positive for outflow. At the impermeable boundaries **V** and **dA** are perpendicular which gives **V·dA** = 0. The integrals over Region I and Region II can therefore be replaced by a single integral over the entire control surface, representing the net outflow from the control volume:

$$\frac{dB}{dt} = \frac{d}{dt} \iiint_{cv} \beta \rho d \vec{\forall} + \iint_{cs} \beta \rho \mathbf{V} \cdot \mathbf{dA}$$
Rate of change within the control when through the control surface

(A.9)

This is the governing equation of the Reynolds' transport theorem.

A.2 THE ST VENANT EQUATIONS

The St Venant equations describe one dimensional unsteady open channel flow. In order to derive these equations the following assumptions must be made:

- The flow is one dimensional, with depth and velocity being constant across the channel cross section
- It is assumed that the hydrostatic pressure governs the flow, with vertical accelerations being negligible
- The longitudinal axis of the channel is approximately a horizontal straight line
- The channel cross sections are not altered by the effects of scour and deposition
- Resistance coefficients for steady uniform flow are applicable (i.e. Manning's and Chezy's equations)
- The fluid has a constant density throughout.

The St Venant equations are derived by considering the conservation of mass (also known as continuity) and the conservation of momentum.

The continuity equation

Consider the Reynolds equation with mass being the extensive property under consideration:

$$\beta = m$$

$$\beta = \frac{dB}{dm} = 1$$
(A.10)

By the law of conservation of mass (mass cannot be created or destroyed):

$$\frac{dB}{dt} = \frac{dm}{dt} = 0 (A.11)$$

Substituting these equations into the Reynolds' equation (A.9) gives:

$$\frac{dB}{dt} = \frac{d}{dt} \iiint \rho dV + \iint \rho \mathbf{V} \cdot \mathbf{dA} = 0$$
 (A.12)

The first integral term represents the time rate of change of the storage within the control volume. The second integral term, the net outflow of mass, can be represented by the difference between the outflow and inflow of mass. Assuming that the density, ρ , is constant, it can be eliminated:

$$\frac{dB}{dt} = 0$$

$$\frac{d}{dt} \iiint_{cs} d\nabla + \iint_{cv} \mathbf{V} \cdot d\mathbf{A} = 0$$

$$\frac{dS}{dt} + \iint_{outlet} \mathbf{V} \cdot d\mathbf{A} + \iint_{inject} \mathbf{V} \cdot d\mathbf{A} = 0$$
(A.13)

This is the conventional form of the integral equation of continuity for an unsteady flow with constant density.

Consider an elemental control volume of length dx. The inflow to the control volume is a quantity ρQ entering the upstream end and the lateral inflow per unit length, ρq , entering as distributed inflow along the length of the channel. The total mass inflow to the control volume is therefore:

$$\iint_{\text{out}} \rho \mathbf{V} \cdot d\mathbf{A} = -\rho Q - \rho q dx \tag{A.14}$$

The outflow from the control volume is the inflow plus the rate of change of the flow over the channel length using the first two terms of a Taylor series expansion:

$$\iint_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

$$\int_{\text{outlief}} \rho \mathbf{V} \cdot d\mathbf{A} = \rho \mathbf{Q} + \rho \frac{\partial \mathbf{Q}}{\partial x} dx$$

The volume of the channel element is Adx, where A is the average cross sectional area. The rate of change of mass stored in the control volume is:

$$\frac{d}{dt}\iiint_{cv} \rho dv = \frac{\partial(\rho A dx)}{\partial t}$$
(A.16)

The partial derivative is used because the control volume is defined to be fixed in size.

Substituting A.14 to A.16 into A.12 gives:

$$\frac{\partial(\rho A dx)}{\partial t} - \rho(Q + q dx) + \rho(Q + \frac{\partial Q}{\partial x} dx) = 0$$
which after cancellation and division by ρdx becomes
$$\frac{\partial Q}{\partial x} + \frac{\partial A}{\partial t} - q = 0$$
(A.17)

assuming that the density is constant.

The momentum equation

Consider the Reynolds transport theorem applied to momentum. The extensive property is the momentum in the control volume:

$$\mathbf{B} = m\mathbf{V}$$

so that (A.18)
 $\frac{d\mathbf{B}}{dm} = \mathbf{V}$

By Newton's second law the time rate of change of momentum is equal to the net forces applied to the object in the direction of the change in momentum:

$$\frac{d\mathbf{B}}{dt} = \frac{d(m\mathbf{V})}{dt} = \Sigma \mathbf{F}$$
(A.19)

Substituting this into the Reynolds' transport theorem:

$$\frac{d\mathbf{B}}{dt} = \frac{d}{dt} \iiint_{c_{\mathbf{X}}} \mathbf{V} \rho d\mathbf{V} + \iint_{c_{\mathbf{X}}} \mathbf{V} \rho \mathbf{V} \cdot d\mathbf{A} = \Sigma \mathbf{F}$$
 (A.20)

This states that the rate of change of momentum stored within the control volume plus the net outflow of momentum from the control volume is equal to the sum of the forces applied to the control volume. We will consider each of these terms in turn.

Momentum

The mass inflow rate to the control volume is the sum of the inflow at the upstream end plus the distributed inflow along the length of the channel. The corresponding momentum is therefore:

$$\iint_{\text{point}} \mathbf{V} \rho \mathbf{V} \cdot \mathbf{dA} = -\rho (\beta V \mathbf{Q} + \beta \mathbf{v}_x q d\mathbf{x}) \tag{A.21}$$

where β is the momentum correction factor or Boussinesq factor and v_x is the component of the velocity of the lateral inflow in the direction x.

The momentum leaving the control volume is:

$$\iint_{\text{outlief}} \mathbf{V} \rho \mathbf{V} \cdot d\mathbf{A} = \rho (\beta V Q + \frac{\partial (\beta V Q)}{\partial x} dx)$$
(A.22)

The volume of the control volume is Adx. Its momentum is therefore $\rho AdxV$. Therefore the time rate of change of the stored momentum is:

$$\frac{d}{dt} \iiint_{cv} \mathbf{V} \rho dv = \rho \frac{\partial AV}{\partial t} dx$$

$$= \rho \frac{\partial Q}{\partial t} dx$$
(A.23)

Substituting A.21 to A.23 in A.20:

$$\Sigma \mathbf{F} = \rho \frac{\partial \mathbf{Q}}{\partial t} dx + \rho (\beta V \mathbf{Q} + \frac{\partial (\beta V \mathbf{Q})}{\partial x} dx) - \rho (\beta V \mathbf{Q} + \beta v_x q dx)$$

$$= \rho \frac{\partial \mathbf{Q}}{\partial t} dx + \frac{\partial (\beta V \mathbf{Q})}{\partial x} dx - \beta v_x q dx$$
(A.24)

Forces

There are five forces acting on the control volume in the x direction. These are defined below.

The gravity force. The volume of fluid in the control volume is Adx. Its weight
is ρgAdx. The component of gravity force is therefore:

$$F_a = \rho g A dx sin \theta = \rho g A S_o dx$$
 (A.25)

where θ is the angle of the channel slope to the horizontal.

The friction force. The shear stress on the wetted perimeter, P, of the channel
is -τ₀Pdx. But τ₀ = γRS₁=ρgA/PS₁ under the assumption that the friction slope
can be computed from the uniform flow equation. The friction force is
therefore:

$$F_t = -\rho g A S_t dx$$
 (A.26)

where S_f is derived from resistance equations such as the Manning or Chezy equations.

 The contraction or expansion force. Abrupt changes in the channel cross section cause energy losses due to the creation of turbulent eddies in the flow. These eddies are related to the changes in velocity head, V²/2g.

$$F_e = -\rho gAS_e dx$$
 (A.27)

where $S_e = \frac{K_e}{2g} \frac{\partial \left(\frac{Q}{A}\right)^2}{\partial x}$, with K_e , the expansion/contraction co-efficient,

negative for channel expansion and positive for contraction.

 Wind Shear force. This is caused by the frictional force of wind against the surface of the fluid. It is defined as:

$$F_w = -W_t B_D dx \qquad (A.28)$$

where tw is the wind shear stress, defined as

$$W_r = \frac{C_r |V_r| V_r}{2} \tag{A.29}$$

and V_r is the velocity of the fluid relative to the air. τ_w is defined as acting opposite to the direction of flow:

$$V_r=Q/A-V_w\cos\omega$$
 (A.30)

with V_w being the velocity of the air at an angle ω to the flow direction.

Pressure Force. The unbalanced pressure force in the direction of flow is the result of the hydrostatic force on the upstream end of the control volume, the hydrostatic force on the downstream side and the component of the pressure force exerted by the banks of the channel:

$$F_p = F_{\mu s} - F_{d s} + F_{bank} \tag{A.31}$$

Consider an element of thickness dw at a depth from the surface of y-w with a width b. The hydrostatic pressure on the element is $\rho g(y-w)bdw$. The total hydrostatic force on the upstream end of the control volume:

$$F_{u/s} = \int_{0}^{y} \rho g(y - w)bdw \tag{A.32}$$

The hydrostatic force on the downstream end:

$$F_{dis} = F_{uis} + \frac{\partial F_{uis}}{\partial x} dx$$

and using the Liebnitz rule for differentiation of an integral where the limits are functions of the variable of integration:

$$\frac{\partial F_{u/s}}{\partial x} = \int_{0}^{y} \rho g \frac{\partial y}{\partial x} b dw + \int_{0}^{y} \rho g(y - w) \frac{\partial b}{\partial x} dw$$
because $A = \int_{0}^{y} b dw$,
$$\frac{\partial F_{u/s}}{\partial x} = \rho g A \frac{\partial y}{\partial x} + \int_{0}^{y} \rho g(y - w) \frac{\partial b}{\partial x} dw$$
(A.33)

The compound force due to the changing width of the banks is related to the rate of change of the width of the channel:

$$F_{banks} = \left[\int_{0}^{y} \rho g(y - w) \frac{\partial b}{\partial x} dw \right] dx$$
 (A.34)

Therefore:

$$F_{p} = F_{u/s} - (F_{u/s} + \frac{\partial F_{u/s}}{\partial x} dx) + F_{banks}$$

$$= -\frac{\partial F_{u/s}}{\partial x} dx + F_{banks}$$

$$= -\left[\rho g A \frac{\partial y}{\partial x} + \int_{0}^{y} \rho g(y - w) \frac{\partial b}{\partial x} dw\right] dx + F_{banks}$$

$$= -\rho g A \frac{\partial y}{\partial x} dx$$
(A.35)

The momentum equation (A.24) in its full form after division by dx is therefore:

$$\rho gAS_{o} - \rho gAS_{t} - \rho gAS_{e} - W_{t}B\rho - \rho gA\frac{\partial y}{\partial x} = -\rho \left[\beta v_{x}q - \frac{\partial(\beta VQ)}{\partial x}\right] + \rho \frac{\partial Q}{\partial t}$$
which simplifies to:
$$(A.36)$$

$$\frac{\partial Q}{\partial t} + \frac{\partial(\beta VQ)}{\partial x} + gA\left(\frac{\partial y}{\partial x} - S_{o} + S_{t} + S_{e}\right) - \beta v_{x}q + W_{t}B = 0$$

The pair of St Venant equations are therefore the continuity and momentum equations:

$$\frac{\partial Q}{\partial x} + \frac{\partial A}{\partial t} - q = 0 \tag{A.37}$$

$$\frac{\partial Q}{\partial t} + \frac{\partial (\beta VQ)}{\partial x} + gA \left(\frac{\partial y}{\partial x} - S_0 + S_t + S_e \right) - \beta v_x q + W_t B = 0$$
 (A.38)

A.3 SUMMARY

In this chapter the St Venant equations of flow were derived from the Reynolds Transport Theorem. The following chapter discusses various distributed flow routing methods, which are based on the St Venant equations and compares them to lumped flow routing methods in terms of their applicability to the Orange River before the choice of model used to simulate the Orange River is justified.

B HYDRAULIC MODELS

The unsteady flow of water in an open channel can be described by various mathematical models. These models can be either lumped flow routing models, which are based solely on the principle of continuity of mass, or distributed flow routing models which are described by the St Venant equations of flow which were derived in Appendix A. The theoretical principles of these models are briefly described below and their applicability to the Orange River is discussed.

B.1 LUMPED FLOW ROUTING

Lumped flow routing is based on the continuity equation in which the change in time of the volume of water stored within a river section, $\frac{dS}{dt}$, is the difference between the inflow to and outflow from the section. (See Equation A.13)

$$\frac{dS}{dt} = I(t) - Q(t) \tag{B.1}$$

or by discretising

$$S_2 - S_1 = \frac{I_2 + I_1}{2} \Delta t + \frac{Q_2 + Q_1}{2} \Delta t$$
 (B.1a)

where the subscripts 1 and 2 refer to the variable at time = t and time = $t+\Delta t$ and S is the storage, I the inflow to the system and Q the outflow from the system.

If the inflow at time = $t+\Delta t$ is known, the unknown variables in equation B.1a are S_2 and Q_2 . In order to solve these unknown variables, a second function relating storage to inflow and outflow is required. In general the storage is a function of the inflow and outflow from the system and their rate of change with regard to time. The storage function which is actually applied is dependent on the nature of the river which is to be modelled. Three methods of lumped flow routing are described in the following sections.

B.1.1 Level Pool Routing

In level pool routing it is assumed that the water surface level remains horizontal. Storage is assumed to be a function of the water surface level and the outflow is controlled by a structure with the flow being a function of water surface level. The two equations, both functions of water level, can be combined so that the storage is expressed as a function of outflow, Q. The equations used in this method are generally expressed as:

$$\frac{dS}{dt} = I(t) - Q(t) \tag{B.2}$$

$$S = Q(t)$$
 (B.3)

This method is applicable only where the water surface remains horizontal such as in large pools or reservoirs which are comparatively wider and deeper than they are long in the direction of flow. This method is therefore not applicable to the Orange River and it will not be discussed further in this report.

B.1.2 The Muskingum Method

This method is commonly used to describe a variable discharge-storage relationship and is included in the ISIS Flow software package. The storage in the river section can be conceived to comprise of two parts, the prism storage beneath the line parallel to the river bed and the wedge storage which is the volume of water above the parallel line and the water surface. The storage in the prism is equal to KQ, where K is a storage constant. The storage in the wedge is equal to KX(I-Q), where the magnitude of X determines the importance of the difference between the inflow and outflow and is in the range $0 \le X \le 0.5$. The storage can therefore related to inflow and outflow by:

$$S = KQ + KX(I - Q) \tag{B.4}$$

Or rearranged to:

$$S = K[XI + (1-X)Q]$$
 (B.5)

Substituting B.5 in B.1a and rearranging gives:

$$Q_2 = C_1 I_1 + C_2 I_2 + C_3 Q_1, where$$

$$C_1 = \frac{\Delta t - 2KX}{2K(1-X) + \Delta t}$$

$$C_2 = \frac{\Delta t + 2KX}{2K(1-X) + \Delta t}$$

$$C_3 = \frac{2K(1-X) - \Delta t}{2K(1-X) + \Delta t}$$
(B.6)

It should be noted the $C_1+C_2+C_3=1$ and C_1,C_2,C_3 should be greater than 0, which places restrictions on Δt . K is the time of travel of the hydrograph through the reach and X controls the shape of the hydrograph from translation to diffusion.

B.1.3 The linear reservoir model

The linear reservoir (or tank) model is one where the storage is linearly related to its outflow:

$$S = kQ (B.7)$$

where k is the storage constant with the dimension of time and is closely related to the Muskingum K. A single linear reservoir is therefore a special case of the Muskingum model where X = 0.

Substituting this equation into equation B.1a and re-arranging gives

$$Q_{2} = C_{1}I_{1} + C_{2}I_{2} + C_{3}Q_{1}, where$$

$$C_{1} = 1 - \frac{k(1 - C_{3})}{\Delta t}$$

$$C_{2} = \frac{k(1 - C_{3})}{\Delta t} - C_{3}$$

$$C_{3} = e^{-\frac{\Delta t}{k}}$$
(B.8)

The impulse response function describes the unique response of a system to a unit impulse. If a system receives an instantaneous unit input at time τ the response at some later time t is u(t- τ). Consider that the continuous input to a system is a sequence of infinitesimal impulses, then $I(t)d\tau$ is the volume input to the system, during $d\tau$ where I(t) is the rate of input. The response to the complete input to the system is therefore:

$$Q(t) = \int_{0}^{\tau} I(\tau)u(t-\tau)d\tau$$
 (B.9)

This expression is known as the convolution integral.

It can be shown that for a linear reservoir the impulse response function is:

$$u(t) = \frac{1}{k}e^{\frac{-(t)}{k}}$$
 (B.10)

A river reach may be represented by a series of linear reservoirs with the outflow from one reservoir being the inflow to the next with each of these reservoirs having the same storage constant k. This concept was introduced by Nash (1957). Consider

a system of two reservoirs. The outflow from the first reservoir $q_1 = u(t) = \frac{1}{k}e^{\frac{-(t)}{k}}$ and is the inflow I(t) to the next reservoir. Therefore the outflow from the second reservoir is then

$$q_{2}(t) = \int_{0}^{\tau} I(\tau)u(t-\tau)d\tau$$

$$= \int_{0}^{\tau} \left(\frac{1}{k}\right)e^{-\frac{t}{k}}\frac{1}{k}e^{\frac{-(t-\tau)}{k}}d\tau$$

$$= \frac{t}{k^{2}}e^{\frac{-t}{k}}$$
(B.11)

Developing this concept further it can be shown that the outflow from the nth reservoir is a gamma function:

$$q_n(t) = \frac{1}{k(n-1)!} \left(\frac{t}{k}\right)^{n-1} e^{\frac{-t}{k}}$$
 (B.12)

Nash proved that the values of k and n can be determined using the first and second moments, M₁ and M₂, of the inflow hydrograph about the origin t=0:

$$M_1 = nk$$

$$M_2 = n(n+1)k^2$$
(B.13)

The two equations can be combined to solve for n and k

$$M_{Q_1} - M_{I_1} = nk$$

 $M_{Q_2} - M_{I_2} = n(n+k)k^2 + 2nkM_{I_2}$ (B.14)

where M refers to the moment, Q refers to the outflow, I to the inflow and the subscript numbers to the first or second moment about the origin. Note that k (for the single tank) or M_I for n tanks is the time between the centroids of the inflow and outflow hydrographs in the reach, so is in fact the time of travel through the reach, the analogue of K in the Muskingham equation. Note these times of travel are independent of flow rate.

B.2 DISTRIBUTED FLOW ROUTING

The St Venant equations describe one dimensional unsteady open channel flow. These equations are applicable only under certain conditions which are listed in Appendix A.2

Whereas the lumped flow routing methods are based on the continuity equation and an equation relating storage and flow (which replaces the momentum equation), the distributed flow routing methods are based on the St Venant equations, which are based on the principles of conservation of mass and conservation of momentum. These equations are derived in Appendix A using Reynolds Transport theorem. Neglecting wind shear and eddy losses these equations (A.37 and A.38) become:

The Continuity Equation

$$\frac{\partial Q}{\partial x} + \frac{\partial A}{\partial t} = q \tag{B.15}$$

The Momentum equation

$$\frac{1}{A}\frac{\partial Q}{\partial t} + \frac{1}{A}\frac{\partial}{\partial x}\left(\frac{\beta Q^{2}}{A}\right) + g\frac{\partial y}{\partial x} - g(S_{o} - S_{f}) = 0$$
Local

A convective acceleration term

Convective acceleration term

Convective acceleration term

Convective term

Pressure force force term

(B.16)

The local acceleration term describes the change in velocity with time. The convective acceleration term describes the change in momentum due to the change in velocity over the channel length. The pressure force term describes the change in water depth along the length of the channel. The gravity force is proportional to the change in bedslope S₀. The friction force is proportional to the friction slope S_f and indirectly proportional to the channel conveyance, K

$$S_r = \frac{Q|Q|}{K^2}$$
, where (B.17)
 $K^2 = \frac{A^2 R^{\frac{1}{4}}}{n^2}$ and $R = \frac{A}{P}$

R is the hydraulic radius, P is the length of the wetted perimeter and n is Manning's roughness coefficient.

There are several variations of the distributed flow routing methods. These models are based on the St Venant equations. They are referred to as distributed models because the flow is described as a function of both space and time. These distributed models differ with respect to the terms of the St Venant's momentum equations which are neglected. They include:

- the kinematic wave model, which neglects the local acceleration, convective acceleration and the pressure force term. This model is only applicable if it can be assumed that S₀=S_f
- the diffusion wave model neglects the local acceleration and convective acceleration terms
- the dynamic wave model does not neglect any terms

A wave is defined as a variation in depth or flow which propagates through the channel. Changes in flow rate or flow depth are waves. The velocity with which a wave propagates relative to the local flow velocity is known as the wave's celerity.

B.2.1 The kinematic wave model

The kinematic model is described by the following equations:

Continuity

$$\frac{\partial Q}{\partial x} + \frac{\partial A}{\partial t} = q$$
 (B.18)

Momentum

$$S_0 = S_f$$
 (B.19)

Equation B.19 can also be written as

$$A = \alpha Q^{\beta} \tag{B.20}$$

Differentiating A in B.20 gives

$$\frac{\partial A}{\partial t} = \alpha \beta Q^{\beta-1} \frac{\partial Q}{\partial t}$$
 (B.21)

Substituting B.21 into B.18 gives

$$\frac{\partial Q}{\partial x} + \alpha \beta Q^{\beta-1} \frac{\partial Q}{\partial t} = q$$
 (B.22)

It can therefore be seen that kinematic waves are dependent on flow only. If the lateral inflow

$$q = \frac{dQ}{dx}$$
 (B.23)

and

$$\alpha \beta Q^{\beta-1} = \frac{dt}{dx}$$
(B.24)

then substituting B.24 into B.22 gives

$$\frac{\partial Q}{\partial x} + \frac{\partial Q}{\partial t} \frac{dt}{dx} = \frac{dQ}{dx}$$
(B.25)

Differentiating B.20 with respect to A gives

$$1 = \alpha \beta Q^{\beta - 1} \frac{dQ}{dA}$$

$$\frac{dQ}{dA} = \frac{1}{\alpha \beta Q^{\beta - 1}}$$
(B.26)

Comparing B.24 and B.26 it can be seen that

$$c_k = \frac{dQ}{dA} = \frac{dx}{dt}$$
 (B.27)

If Mannings equation is used to describe the frictional slope

$$C_k = \frac{5Q}{3A} = \frac{5V}{3}$$

The kinematic celerity of the element of a wave at flow rate Q is described as c_k and has a constant velocity of $\frac{dx}{dt}$. The flow changes with distance only if there is lateral inflow, i.e. q>0.

B.2.2 The Diffusion Wave model

Cunge (1969) demonstrated that the Muskingum method (Equation B.6) is an approximation of the kinematic wave. He also demonstrated that if K and X are defined as certain functions of flow, Q, and its kinematic celerity, c_k, the Muskingum equation is a simplified diffusion model. This model is referred to as the Muskingum-Cunge method and is defined as follows:

$$Q_{2} = C_{1}I_{1} + C_{2}I_{2} + C_{3}Q_{1}, where$$

$$C_{1} = \frac{\Delta t - 2KX}{2K(1 - X) + \Delta t}$$

$$C_{2} = \frac{\Delta t + 2KX}{2K(1 - X) + \Delta t}$$

$$C_{3} = \frac{2K(1 - X) - \Delta t}{2K(1 - X) + \Delta t}$$
(B.28)

with:

$$K = \frac{\Delta X}{c_k} = \frac{\Delta X}{\frac{\partial Q}{\partial A}} and$$

$$X = \frac{1}{2} \left(1 - \frac{Q}{Bc_k S_0 \Delta X} \right)$$
(B.29)

where c_k is the kinematic celerity of the wave corresponding to the (varying) flow rate Q and the width of the water surface, B. For stability it is required that $0 \le X \le 0.5$.

B.2.3 The dynamic flow model

The dynamic flow model is based on the full St Venant equations, incorporating all of the terms. The solution to the St Venant equations is described in Appendix C. The St Venant equations are derived in Appendix A.

A full discussion in the merits of the various flow models is now discussed in Section B.3.

B.3 SELECTION OF A MODEL FOR THE ORANGE RIVER

The selection of a routing model for a particular application is influenced by the relative importance one places on (Fread, 1985):

- Model accuracy
- The accuracy required for the application
- The type and availability of the required data
- The available computational facilities
- The computational costs
- The extent of the flood wave information desired
- One's familiarity with the model
- The extent of documentation, range of applicability, and availability of a routing model
- The complexity of the mathematical formulation if the model has to be coded.
- One's capability and time available to develop a particular type of routing model

Kinematic wave routing can be used when the inertial and pressure forces can be ignored, when channel slopes are steep and the backwater effect is not important. A diffusion wave model can be used when the pressure forces become important but inertial forces are not important.

The releases from Vanderkloof Dam are of particular importance when choosing a model for the Orange River. The maximum releases from Vanderkloof Dam are in the order of 170m³/s to 200m³/s depending on the level in the dam. The valves through which the releases are controlled can be opened within 3 minutes. Consequently when the valves are opened a rapid change in flow and stage results, which propagates rapidly downstream. The model which is chosen must be able to handle these rapid changes. Discussions relating to the various types of models follow.

B.3.1 Lumped Flow Routing Models

The advantage of lumped flow routing models is that they are mathematically simple and are therefore computationally faster than the more complex dynamic models. A further advantage is that they require no data describing the modelled river and are therefore cheaper to set up than the dynamic models.

The first disadvantage of the lumped flow models, specifically the Muskingum and tank models, is that they have fixed travel times, as indicated at the end of Section B.1.3. Records of flow times show that the travel time in the Orange River is strongly dependent on the flow rate, so for this reason lumped models are not appropriate here. With regard to a system of linear reservoirs Papastylianos (1997) showed that although Nash's method of determining n and k worked for a hypothetical channel

section it was not applicable to a reach of the Orange River (Papastylianos, 1997). However, Papastylianos did show that the reach could be successfully modelled for a system of reservoirs where n and k were determined by calibration against recorded data. However, this method was only tested for two input hydrographs and the range of flows for which these values were applicable was not investigated.

Secondly, the backwater effects cannot be modelled in lumped flow routing models as the term for momentum is discarded. When there is a structure or a control point in a reach with sub-critical flow, the effect of the control on the flow of water propagates upstream. This effect is known as the backwater effect and is due to the change in the momentum of the flow caused by the control. Where this effect is significant, the lumped flow routing models may not be sufficiently accurate.

Thirdly, level pool routing is only applicable where the water surface remains horizontal such as in large pools which are comparatively wider and deeper than they are long in the direction of flow. This method is therefore not applicable to the Orange River.

Finally, the evaporation module which was developed for the ISIS software during the Evaporation Losses from South African Rivers (McKenzie and Craig, 1999) models evaporation from the river surface area. As the surface area is dependent on water surface level this module was developed for the full hydrodynamic model which includes the water surface level and backwater effects in its solution, rather than for the Muskingum model which is an "input-output" model.

B.3.2 Kinematic Wave Model

Using Manning's equation ($\frac{Q}{A} = \frac{1}{n} \left(\frac{A}{P}\right)^{\frac{2}{3}} S_f^{\frac{1}{2}}$) equation B.27 shows that the celerity of a kinematic wave increases as Q increases, which would result in the wave moving down the river with its rising front getting steeper, but without diffusion or attenuation. It will be shown in Chapter 9 (and in particular in Figures 9.5 to 9.7) that there is a large diffusion effect on the flow in the Orange River. Because kinematic modelling essentially translates without diffusion (neglecting backwater effects) and should usually only be used on slopes in excess of 1:500 (the Orange River has a flat slope of +/-1:3000), it was decided that the kinematic wave model was inappropriate for modelling the Orange River.

Another check on the applicability of the kinematic wave model is given by Ponce and Symons (1977) and Ponce et al (1978) who suggested approximate criteria for the applicability of kinematic type models, including the Muskingum model. If the following criteria are met the routing errors will be less than 5 percent:

$$r_r S_o^{-1.6}(q_o^{-0.2}n^{1.2}) \ge 0.014$$

where τ_r is the time of rise (in hours) of the rising arm of the hydrograph, S₀ is the channel slope and q₀ is the unit width reference discharge.

For the Orange River downstream of Vanderkloof Dam this equates to:

$$0.05 \times 0.0003^{1.6} \times (200/150)^{0.2} \times 0.027^{1.2} = 1.6 \times 10^{-9} << 0.014$$

A similar criterion was suggested for diffusion type models including Muskingum-Cunge:

$$\tau_r S_o^{15} (q_o n)^{0.3} \ge 0.003$$

Applied to the Orange River just downstream of Vanderkloof Dam this yields:

$$0.05 \times 0.0003^{1.5} \times (200/150 \times 0.027)^{0.3} = 9.6 \times 10^{-8} < 0.003$$

A further drawback of lumped flow routing including the Muskingum method and the kinematic and diffusion methods, including Muskingum-Cunge, is that the water level is not modelled as part of the calculations. The water levels must be determined as a function of a stage discharge relationship at the points where it is required.

However, it should be noted that the rate of rise of the hydrograph released from Vanderkloof Dam is extreme and the simplified models may be applicable to sections further down the river, where the hydrographs have dissipated and the slope is steeper.

The dynamic model was chosen for this study in order to handle the conditions at Vanderkloof Dam and to include the evaporation module.

The disadvantages of the dynamic model are worth mentioning. The first, and main, disadvantage is that the dynamic model's demand for data is intensive, requiring information regarding cross sections of the river and estimates of the roughness at relatively frequent intervals. Providing this data for the full length of the Orange River was a time consuming procedure, with cross sectional data being taken from 1:50000 maps and aerial photographs, and the roughness and sub-surface cross sections being calibrated against recorded flow (See Chapter 9). Although the resolution of this data has limited accuracy, reasonable results were obtained with the information which was modelled

A further disadvantage of the dynamic model is that it is mathematically more complex than the simplified models and is therefore computationally more expensive. However, with the improvements of computer hardware and processing speed, this is no longer seen as a reason to reject the dynamic model. The hydraulic models developed in this study are based on the full dynamic modelling technique.

It should also be noted that there are various dynamic modelling packages available commercially and freely from the internet (HEC-2, HEC RAS etc). ISIS Flow was chosen because of the project team's association with Halcrows and because the code was made available in order to make the necessary changes for the purposes of this study.

B.4 SUMMARY

Having compared the various flow routing models and discussed their applicability to the Orange River it was decided to used the fully hydrodynamic model, based on the full St Venant equations, to simulate the Orange River downstream of Vanderkloof Dam. In the following chapter the solution of the St Venant equations is described so that the hydraulic modelling developments discussed in Chapter 5 can be understood.

C SOLUTION OF THE ST VENANT'S EQUATIONS

The St Venant equations (A.37 and A.38) are a pair of one dimensional non-linear partial differential equations. Other than in certain restricted conditions the St Venant equations cannot be solved using analytical methods. If the general equations are to be solved, numerical methods must be used. These numerical methods can be classified as direct methods or characteristic methods. In the direct methods the St Venant equations of continuity and momentum are written as finite difference equations. In other words the partial derivatives of flow and stage are determined as the incremental differences between points in time and points in space. The method of characteristics involves resolving the St Venant equations into their characteristic form and then solving the characteristic equations either numerically or by finite difference approximations. The characteristic method will not be used here, but knowledge of the characteristics affects the way the boundary conditions are established. What follows is a paraphrase of Chow et al. (1998) and is included for completeness.

C.1 FINITE DIFFERENCE SCHEMES

Consider a function u(x). A Taylor series expansion of u(x) at $x+\Delta x$ and $x-\Delta x$ gives:

$$u(x + \Delta x) = u(x) + \Delta x \frac{\partial u(x)}{\partial x} + \frac{1}{2} \Delta x^2 \frac{\partial^2 u(x)}{\partial x^2} + \frac{1}{6} \Delta x^3 \frac{\partial^3 u(x)}{\partial x^3} + \dots + \frac{1}{n!} \Delta x^n \frac{\partial^n u(x)}{\partial x^n}$$
(C.1)

$$u(x - \Delta x) = u(x) - \Delta x \frac{\partial u(x)}{\partial x} + \frac{1}{2} \Delta x^2 \frac{\partial^2 u(x)}{\partial x^2} - \frac{1}{6} \Delta x^3 \frac{\partial^3 u(x)}{\partial x^3} + \dots \\ (-1)^n \frac{1}{n!} \Delta x^n \frac{\partial^n u(x)}{\partial x^n}$$
(C.2)

A central difference scheme is based on subtracting equation C.2 from equation C.1:

$$u(x + \Delta x) - u(x - \Delta x) = 2\Delta x \frac{\partial u}{\partial x} + R$$

giving:
$$\frac{\partial u}{\partial x} \approx \frac{u(x + \Delta x) - u(x - \Delta x)}{2\Delta x}$$
(C.3)

where R is the residual representing the third and higher order terms and is assumed to be negligible if Δx is small enough.

A forward difference scheme is obtained by subtracting u(x) from equation C.1:

$$u(x + \Delta x) - u(x) = \Delta x \frac{\partial u}{\partial x} + R$$

giving $\frac{\partial u}{\partial x} \approx \frac{u(x + \Delta x) - u(x)}{\Delta x}$ (C.4)

assuming that R, representing second and higher order terms, is negligible.

A backward difference scheme is obtained by subtracting equation C.2 from u(x):

$$u(x) - u(x + \Delta x) = \Delta x \frac{\partial u}{\partial x} - R$$

$$\frac{\partial u}{\partial x} \approx \frac{u(x) - u(x + \Delta x)}{\Delta x}$$
(C.5)

C.1.1 Solution of finite difference schemes

The independent variables of the St Venant equations, given in equations A.37 and A.38, are x and t. The unknown hydraulic quantities in the equations are flow, Q, and stage, h, which is used instead of the cross-sectional area A. Note that h = z+y (level of bed + depth of flow) as shown in Figure C.1. x is taken as the horizontal distance along the water course bed and the slope S_0 is assumed to be small (less than 1:20).

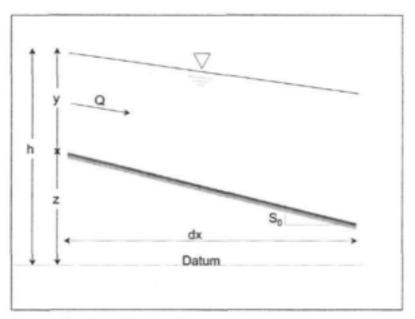


Figure C.1: Definition of h=y+z

The unknown variables Q and h can be found by discretising the x-t plane into a grid of finite intervals as shown in Figure C.2. Consider a river reach as being defined as a having an upstream and downstream control section, where boundary conditions apply. The river reach is divided into discrete intervals of length Δx. In ISIS these

intervals are defined by the RIVER and INTERPOLATE sections. The time of the simulation is divided into discrete time intervals of length Δt . The finite difference equations are determined and solved at the discrete points on this x-t plane. The point ($i\Delta x$, $i\Delta t$) is designated as (i,j) in Figure C.2.

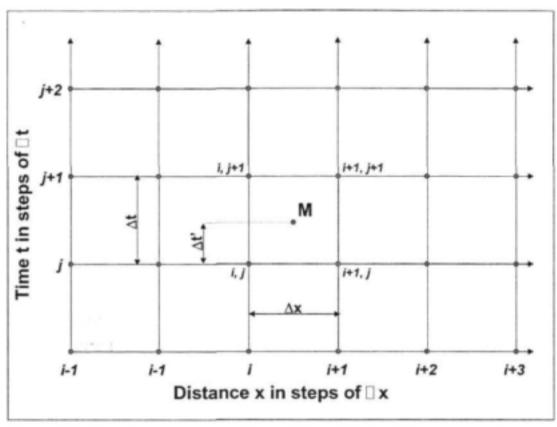


Figure C.2: The x-t plane used for the solution of finite difference equations

The points on the time line perpendicular to the X-axis which pass through point $(i\Delta x, j\Delta t)$ represent that point $i\Delta x$ at sequential time intervals, j, j+1, j+2.... The points on the distance line perpendicular to the time line which passes through point $(i\Delta x, j\Delta t)$ represent the sequential points along the river i, i+1, i+2... at time j.

The solution of finite difference equations can be obtained using either an explicit scheme or an implicit scheme. In the explicit schemes the solutions for the unknown values are determined sequentially along a time line (row) from one distance point to the next. In the implicit scheme the unknowns are determined simultaneously along a time line (row).

C.1.2 The Explicit Scheme

Assume that either of the hydraulic properties (Q or h) are represented by u and that these properties are known along the time row j. The hydraulic properties must be determined at the point $(i\Delta x, (j+1)\Delta t)$. The simplest stable scheme is established

using a forward difference scheme for the time derivative and a central difference scheme for the distance derivative. The spatial derivative is written using known terms on time row i:

$$\frac{\partial u_i^j}{\partial t} = \frac{u_i^{j+1} - u_i^j}{\Delta t}, \text{and}$$

$$\frac{\partial u_i^j}{\partial x} = \frac{u_{i+1}^{j} - u_{i-1}^j}{2\Delta t}$$
(C.6)

When the explicit scheme is applied numerical errors are unavoidably introduced into the computation which affects the accuracy. By contrast the numeric stability of a scheme is dependent on the size of Δx and Δt The Courant condition is a guideline for stability:

$$\Delta t \leq \min_{i} \left[\frac{\Delta x_{i}}{|\mathbf{v}| + |\mathbf{c}|} \right]$$
 (C.7)

where v is the velocity at x and $c = \pm \sqrt{gD}$ is the celerity of the dynamic wave. The Courant condition must be met for stability but it does not guarantee accuracy.

C.1.3 The implicit scheme

In the implicit scheme the unknown variables are solved simultaneously on row by row, from one time step to the next. The St Venant equations are applied to all the values on a time row simultaneously before the solutions are determined. The space derivative in the interval (i,i+1) at time j\Delta is written as:

$$\frac{\partial u}{\partial x} = \frac{u_{i+1}^{j} - u_{i}^{j}}{\Delta x}$$
 (C.8)

Equation C.8 will, on average, most accurately represent the value of the derivative at the mid-point of the interval. This idea is exploited in the Priessman Four Point implicit scheme (which is used in the ISIS software) in the following way as a weighted four point scheme. Consider the point M in Figure C.2 half way between the columns i and i+1 and at Δt from row j. The time derivative of the hydraulic property u at M, which can stand for either Q or h is the average of the time derivatives at time i and i+1:

$$\frac{\partial u}{\partial t} \approx \frac{1}{2} \left[\frac{u_{i+1}^{j+1} - u_{i+1}^{j}}{\Delta t} + \frac{u_{i}^{j+1} - u_{i}^{j}}{\Delta t} \right] \\
= \frac{u_{i+1}^{j+1} + u_{i}^{j+1} - u_{i+1}^{j} - u_{i}^{j}}{2\Delta t}$$
(C.9)

The spatial derivative is determined by finding the derivative at times $j\Delta$ and $(j+1)\Delta t$ and then combining them using a weighting factor, $\theta = \frac{\Delta t'}{\Delta t}$, depending on the distance of M from row j:

The spatial derivative at j:

$$\frac{\partial u_i^j}{\partial x} = \frac{u_{i+1}^j - u_i^j}{\Delta x}$$

The spatial derivative at j+1:

$$\frac{\partial u_i^{j+1}}{\partial x} = \frac{u_{i+1}^{j+1} - u_i^{j+1}}{\Delta x}$$

The spatial derivative at M

$$\frac{\partial u}{\partial x} = \theta \frac{u_{i+1}^{j+1} - u_i^{j+1}}{\Delta x} + (1 - \theta) \frac{u_{i+1}^{j} - u_i^{j}}{\Delta x}$$
 (C.10)

If θ is equal to 0 the scheme is fully explicit as point M will be at time row j Δt , whereas if θ =1 the scheme is fully implicit with the M being at time (j+1) Δt . For practical implicit schemes $0.5 \le \theta \le 1$.

The major difference between the implicit and explicit schemes is that explicit schemes are only stable if the Courant condition is met ($\Delta t \leq \min_{l} \left[\frac{\Delta X_{l}}{|v| + |c|} \right]$), whereas implicit schemes are conditionally stable for all time steps, although accuracy is another issue.

Using the implicit scheme the unknown variables are solved simultaneously at a particular time before progressing on to the following time step. In the ISIS software an under-relaxation factor alpha is used to smooth the convergence between the timesteps.

C.2 SOLVING THE ST VENANT EQUATIONS

Recall the St Venant equations (equations A.37 and A.38), slightly modified:

The Continuity Equation

$$\frac{\partial Q}{\partial x} + \frac{\partial A}{\partial t} = q$$

$$\frac{\partial Q}{\partial x} + \frac{\partial (A + A_0)}{\partial t} - q = 0$$
(C.11)

or

The Momentum equation

$$\frac{1}{A}\frac{\partial Q}{\partial t} + \frac{1}{A}\frac{\partial}{\partial x}\left(\frac{\beta Q^{2}}{A}\right) + g\frac{\partial h}{\partial x} + S_{t} + S_{\theta} - \frac{1}{A}\beta qv_{x} + \frac{1}{A}W_{t}B = 0$$
or
$$\frac{\partial Q}{\partial t} + \frac{\partial}{\partial x}\left(\frac{\beta Q^{2}}{A}\right) + gA(\frac{\partial h}{\partial x} + S_{t} + S_{\theta}) - \beta qv_{x} + W_{t}B = 0$$
(C.12)

where

x = the distance along the river channel

t = time

A = the cross sectional area of the channel at x

A₀ = cross sectional area of off channel storage

q = lateral inflow per unit length of the channel

β = momentum correction factor

g = gravity acceleration

h = water surface elevation

S_f = friction slope

S_e = eddy loss slope

vx = velocity of lateral flow

Wf = wind shear force

B = Breadth of the channel at B

Now using equation C.9 to determine the partial differentials with respect to time in equations C.11 and C.12 (Note that the bed slope has been included in the stage and velocity has been transformed to volumetric flow rate)

$$\frac{\partial Q}{\partial t} = \frac{Q_{i+1}^{j+1} + Q_i^{j+1} - Q_{i+1}^j - Q_i^j}{2\Delta t_j}$$
 (C.13)

$$\frac{\partial (A+A_0)}{\partial t} = \frac{(A+A_0)_{i+1}^{j+1} + (A+A_0)_{i+1}^{j+1} - (A+A_0)_{i+1}^{j} - (A+A_0)_{i}^{j}}{2\Delta t_i}$$
(C.14)

and using equation C.10 to determine the partial differentials with respect to distance in equations C.11 and C.12:

$$\frac{\partial Q}{\partial x} = \theta \frac{Q_{i+1}^{j+1} - Q_i^{j+1}}{\Delta x_i} + (1 - \theta) \frac{Q_{i+1}^{j} - Q_i^{j}}{\Delta x_i}$$
 (C.15)

$$\frac{\partial h}{\partial x} = \theta \frac{h_{i+1}^{j+1} - h_i^{j+1}}{\Delta x_i} + (1 - \theta) \frac{h_{j+1}^{j} - h_i^{j}}{\Delta x_i}$$
 (C.16)

The q and A also depend on the position x:

$$q = \theta \frac{q_{i+1}^{j+1} + q_i^{j+1}}{2} + (1 - \theta) \frac{q_{i+1}^{j} + q_i^{j}}{2}$$

$$q = \theta \overline{q}_i^{j+1} + (1 - \theta) \overline{q}_i^{j+1}$$
(C.17)

$$A = \theta \frac{A_{i+1}^{j+1} + A_i^{j+1}}{2} + (1 - \theta) \frac{A_{i+1}^{j} + A_i^{j}}{2}$$

$$A = \theta \overline{A}_i^{j+1} + (1 - \theta) \overline{A}_i^{j}$$
(C.18)

where \overline{A} and \overline{q} are the average values between the cross sections Δx apart.

Substituting equations C.13 to C.18 into C.11 and C.12 and multiplying by Ax, we get:

The continuity equation

$$\theta(Q_{i+1}^{j+1} - Q_i^{j+1}) + (1 - \theta)(Q_{i+1}^{j} - Q_i^{j}) + \frac{\Delta X}{2 \Delta t} [(A + A_0)_{i+1}^{j+1} + (A + A_0)_i^{j+1} - (A + A_0)_{i+1}^{j} - (A + A_0)_i^{j}] = 0$$
(C.19)

The momentum equation

$$\frac{\Delta X}{2\Delta t_{i}} \left[Q_{i+1}^{j+1} + Q_{i}^{j+1} - Q_{i+1}^{j} - Q_{i}^{j}\right] +$$

$$\theta \left\{ \left(\frac{\beta Q^{2}}{A}\right)_{i+1}^{j+1} - \left(\frac{\beta Q^{2}}{A}\right)_{i}^{j+1} + g\overline{A}_{i}^{j+1} \left[h_{i+1}^{j+1} - h_{i}^{j+1} + \overline{S}_{f_{i}}^{j+1} \Delta x_{i} + \overline{S}_{e_{i}}^{j+1} \Delta x_{i}\right] \right\}$$

$$\left\{ -\left(\overline{\beta q v_{x}}\right)_{i}^{j+1} \Delta x_{i} + \left(\overline{W_{f}}\overline{B}\right)_{i}^{j+1} \Delta x_{i} \right\}$$

$$+ (1-\theta) \left\{ \left(\frac{\beta Q^{2}}{A}\right)_{i+1}^{j} - \left(\frac{\beta Q^{2}}{A}\right)_{i}^{j} + g\overline{A}_{i}^{j} \left[h_{i+1}^{j} - h_{i}^{j} + \overline{S}_{f_{i}}^{j} \Delta x_{i} + \overline{S}_{e_{i}}^{j} \Delta x_{i}\right] \right\} = 0$$

$$\left\{ -\left(\overline{\beta q v_{x}}\right)_{i}^{j} \Delta x_{i} + \left(\overline{W_{f}}\overline{B}\right)_{i}^{j} \Delta x_{i} \right\}$$

where the average values are defined as $\overline{Z} = \frac{Z_i + Z_{i+1}}{2}$

The frictional losses may be defined as

$$\overline{S}_{f_i} = \frac{|Q_i|Q_i}{\overline{K}^2} \tag{C.21}$$

with \overline{K} being the average channel conveyance, which, if defined according to Manning's equation is:

$$\overline{K} = \frac{\overline{A}^2 \overline{R}^{\frac{4}{3}}}{\overline{n}^2}$$
 (C.22)

with R being the average hydraulic radius, $\overline{R} = \frac{\overline{A}}{P}$

Similarly the losses resulting from extraction and expansion are

$$\overline{S_{e_i}} = \frac{K_{e_i}}{2g\Delta x_i} \left[\left(\frac{Q}{A} \right)_{i+1}^2 - \left(\frac{Q}{A} \right)_i^2 \right]$$
 (C.23)

The velocity of the wind relative to the water surface is

$$\overline{V}_{r_i} = \frac{\overline{Q}_i}{\overline{A}_i} - V_w \cos \omega \qquad (C.24)$$

with ω being the angle between the wind and the water velocity vectors. The wind shear factor is defined as:

$$\overline{W_{r_i}} = C_{w_i} |\overline{V_{r_i}}| \overline{V_{r_i}}$$
(C.25)

vol lecilo

where Cw is a frictional drag coefficient.

The chosen river reach is divided into N discrete intervals between the upstream boundary at i=0 and the downstream boundary at i=N. The St Venant equations of momentum and continuity (2 equations) are applied to each of the intervals between the upstream and downstream boundaries, which results in 2N-2 equations.

In equations C.19 and C.20 all of the variables with the subscript j, i.e. all of the variables at time j are known, either from the initial conditions (if j=0) or from the solution to the previous time step. In addition the following terms are also either known or can be calculated: g, Δx_i , βx_i , K_e , C_w , V_w . The remaining unknown terms are: $Q_i^{j+1}, Q_{i+1}^{j+1}, h_{i+1}^{j+1}, h_{i+1}^{j+1}, A_{i+1}^{j+1}, h_{i+1}^{j+1}, B_{i+1}^{j+1}$. However as the area, A, and breadth, B, can be expressed in terms of h the only unknowns that remain are $Q_i^{j+1}, Q_{i+1}^{j+1}, h_i^{j+1}, h_{i+1}^{j+1}$.

Therefore if there are N cross sectional intervals there are 2N (Q and h) unknowns and 2N-2 equations. In order to solve these equations 2 additional equations are required and these are obtained from the boundary conditions which will now be elaborated upon.

C.2.1 Boundary Conditions

The upstream and downstream boundary conditions of a reach of the river determine the uniqueness of the solution of the St Venant equations. Boundary conditions can either be external or internal. The river is divided into reaches by internal boundary conditions such as control structures, junctions or reservoirs. In ISIS the reaches are further divided into intervals by the RIVER and INTERPOLATE units. The RIVER units define the geometry (cross-sectional and longitudinal slope) of the sections of the reaches. INTERPOLATE units are required when the distance or change in geometry between RIVER units is too large for an accurate solution be determined for the model.

External Boundary Conditions

External boundary conditions describing the upstream and downstream ends of the river must be specified in order to solve the St Venant equations. In fact the disturbances which result in unsteady flow are usually introduced at the upstream or downstream boundaries. These boundary conditions determine the uniqueness of the solution.

For subcritical flow, disturbances in flow propagate both upstream and downstream, whereas for supercritical flow the disturbances only propagate downstream. Therefore for subcritical flow two independent boundary conditions are required, one at the upstream and the other at the downstream ends of the river.

For sub-critical flow the boundary conditions which may be applied are:

- A discharge hydrograph upstream and a stage hydrograph downstream
- A discharge hydrograph upstream and a rating curve (stage vs. flow depth) downstream

The Orange River has a discharge hydrograph (the releases from Vanderkloof Dam) at the upstream end of the model and a stage-discharge relationship at the downstream end of the model.

Internal Boundary Conditions

At the internal boundaries the flow varies rapidly and the St Venant equations cannot be applied across them. This break may be caused by control structures such as weirs, reservoirs, waterfalls or confluences. Empirical stage-discharge relationships are used to model the river at these points. The mathematical model is separated into different reaches by these internal boundaries as the stage-discharge relationship is defined by the empirical formulae.

Cross sections must be specified immediately upstream and downstream of the internal boundaries. As with any computational node two equations are required to solve the unknown variables. These are:

· The continuity equations, with negligible time dependent storage:

$$Q_i^{j+1} - Q_{i+1}^{j+1} = 0$$

 The empirical relationship between stage and discharge. The definition of these relationships change as the mode of the flow changes. The mode of the flow describes the flow conditions at the internal boundary, for example if the weir is drowned or flowing freely.

The Real Time Unit as described in Section 4 imposes a set of modified boundary conditions.

C.2.2 Initial Conditions

The initial conditions of the system must be specified in order to solve the first timestep when t=0. The initial conditions are the values for flow and stage, Q and h, at every computational node.

In the context of the operational model of the Orange River the results of the most recent real time simulation are used as the initial conditions for the following real time simulations and for the forecast simulations. Both the real time simulations and the forecast simulation are therefore started at an accurate estimate of the actual, unsteady conditions of the river. The accuracy is essential otherwise computational instabilities result. This practice is at variance with the usual start-up which uses a steady state gradually varied flow computation to determine the initial stage from constant flow. The Orange River is so long that it can never be assumed to be steady.

C.2.3 The Newton-Raphson Method as a solution to the St Venant's equations

In order to simplify the notation, the momentum and continuity equations for the remainder of this discussion will be referred to as follows:

UB(h₀Q₀)=0 the upstream boundary condition at node 0

C₁(h₁,Q₁,h₂,Q₂)=0 the continuity equation and

 $M_1(h_1,Q_1,h_2,Q_2) = 0$ the momentum equation between nodes 1 and 2

 $C_i(h_i,Q_i,h_{i+1},Q_{i+1})=0$ the continuity equation and

 $M_i(h_i,Q_i,h_{i+1},Q_{i+1}) = 0$ the momentum equation between nodes i and i+1

 $C_{N-1}(h_{N-1}Q_{N-1}h_{N},Q_{N})=0$ the continuity equation and

 $M_{N-1}(h_{N-1}, Q_{N-1}, h_N, Q_N) = 0$ the momentum equation between nodes N and N-1

 $DB(h_N, Q_N) = 0$ the downstream boundary condition at N (C.26)

This forms a system a 2N linear equations with 2N unknowns and is solved, for each time step, on an iterative basis using the Newton-Raphson method. At the start of time step j+1, the first estimate of the unknown variables (Q and h) at j+1 are assigned at the N-1 points in the model. These first estimates are related, by means of the weighting factor theta (Section C.1.3), to the known values calculated at timestep j. Computing the relationships in equations C.26 results in a set of 2N residuals, because they will not balance to zero. The estimated values are corrected iteratively until the residuals are acceptably small. An under-relation factor, alpha, is used to smooth or accelerate the convergence between these iterations.

Consider, initially, a system of vector equations $f(\mathbf{x}) = 0$, where \mathbf{x} is the vector of unknown quantities and \mathbf{x}^k is the vector for iteration k. For the St Venant equation the non-linear system is linearised to

$$f(\mathbf{x}^{k+1}) \approx f(\mathbf{x}^{k}) + J(\mathbf{x}^{k})(\mathbf{x}^{k+1} - \mathbf{x}^{k}) \approx 0$$
 (C.27)

where $J(\mathbf{x}^k)$ is made up of the first partial derivatives of $f(\mathbf{x})$ at \mathbf{x}^k and is known as the Jacobian matrix. The residual error is represented by $f(\mathbf{x}^{k+1})$ and the aim is to force it to zero. Rearranging equation C.27 we have:

$$J(\mathbf{x}^{k})(\mathbf{x}^{k+1} - \mathbf{x}^{k}) = -f(\mathbf{x}^{k})$$
 (C.28)

The system is solved for $(\mathbf{x}^{k+1}-\mathbf{x}^k) = \Delta \mathbf{x}^k$ and the next estimate is determined knowing $\Delta \mathbf{x}^k$. The process is repeated until $(\mathbf{x}^{k+1}-\mathbf{x}^k)$ is less than a specified tolerance. Applying equation C.28 to the system of equations in C.26 we get:

$$\frac{\partial UB}{\partial h_{0}} dh_{0} + \frac{\partial UB}{\partial Q_{0}} dQ_{0} = -RUB^{k}$$
for i = 1..N - 1:
$$\frac{\partial C_{i}}{\partial h_{i}} dh_{i} + \frac{\partial C_{i}}{\partial Q_{i}} dQ_{i} + \frac{\partial C_{i}}{\partial h_{i+1}} dh_{i+1} + \frac{\partial C_{i}}{\partial Q_{i+1}} dQ_{i+1} = -RC_{i}^{k}$$

$$\frac{\partial M_{i}}{\partial h_{i}} dh_{1} + \frac{\partial M_{i}}{\partial Q_{i}} dQ_{i} + \frac{\partial M_{i}}{\partial h_{i+1}} dh_{i+1} + \frac{\partial M_{i}}{\partial Q_{i+1}} dQ_{i+1} = -RM_{i}^{k}$$
(C.29)

$$\frac{\partial DB}{\partial h_N}dh_N + \frac{\partial DB}{\partial Q_N}dQ_N = -RDB^k$$

These equations can then be written as a sparse matrix, with four elements along the

These equations can then be written as a sparse matrix, with four elements along the diagonal as shown below (for N=5).
$$\begin{bmatrix} \frac{\partial UB}{\partial h_1} & \frac{\partial UB}{\partial Q_1} \\ \frac{\partial C_1}{\partial h_1} & \frac{\partial C_1}{\partial Q_1} & \frac{\partial C_1}{\partial h_2} & \frac{\partial C_1}{\partial Q_2} \\ \frac{\partial M_1}{\partial h_1} & \frac{\partial M_1}{\partial Q_1} & \frac{\partial M_1}{\partial h_2} & \frac{\partial M_1}{\partial Q_2} \\ \frac{\partial M_2}{\partial h_2} & \frac{\partial M_2}{\partial Q_2} & \frac{\partial C_2}{\partial h_3} & \frac{\partial C_2}{\partial Q_3} \\ \frac{\partial C_3}{\partial h_3} & \frac{\partial C_3}{\partial Q_3} & \frac{\partial M_3}{\partial h_4} & \frac{\partial C_3}{\partial Q_4} \\ \frac{\partial M_3}{\partial h_3} & \frac{\partial C_3}{\partial Q_3} & \frac{\partial M_3}{\partial h_4} & \frac{\partial C_3}{\partial Q_4} \\ \frac{\partial M_4}{\partial h_4} & \frac{\partial M_4}{\partial Q_4} & \frac{\partial M_4}{\partial h_5} & \frac{\partial C_4}{\partial Q_5} \\ \frac{\partial M_3}{\partial h_5} & \frac{\partial C_3}{\partial Q_3} & \frac{\partial M_3}{\partial h_4} & \frac{\partial M_4}{\partial Q_4} & \frac{\partial C_4}{\partial h_5} & \frac{\partial C_4}{\partial Q_5} \\ \frac{\partial M_4}{\partial h_4} & \frac{\partial M_4}{\partial Q_4} & \frac{\partial M_4}{\partial h_5} & \frac{\partial M_4}{\partial Q_5} \\ \frac{\partial DB}{\partial h_5} & \frac{\partial DB}{\partial Q_5} \\ \end{bmatrix}$$

$$(C.30)$$
Solving this set of equation gives values for dh_i and dQ_i. The values for the unknowns in the next iteration (k+1) are then
$$h_i^{k+1} = h_i^k + dh_i \\ Q_i^{k+1} = Q_i^k + dQ_i$$

$$h_i^{k+1} = h_i^k + dh_i$$

 $Q_i^{k+1} = Q_i^k + dQ_i$ (C.31)

The process is repeated until dh; and dQ; are acceptably small.

Finally, to give more detail, we need to define the derivatives in the Jacobian matrix (C.30).

Differentiating C.19 with respect to h_i^{j+1} and h_{i+1}^{j+1} :

$$\frac{\partial C}{\partial h_i} = \frac{\partial C}{\partial A_i} \frac{\partial A_i}{\partial h_i}$$

$$= \frac{\Delta x_i}{2\Delta t_i} \frac{\partial (A + A_0)_i^{l+1}}{\partial h}$$

$$= \frac{\Delta x_i}{2\Delta t_i} (B + B_0)_i^{l+1} \qquad (C.32)$$

because $\Delta A = B\Delta h$

$$\frac{\partial C}{\partial h_{i+1}} = \frac{\partial C}{\partial A_{i+1}} \frac{\partial A_i}{\partial h_{i+1}}$$

$$= \frac{\Delta x_{i+1}}{2\Delta t_j} \frac{\partial (A + A_0)_{i+1}^{j+1}}{\partial h}$$

$$= \frac{\Delta x_{i+1}}{2\Delta t_i} (B + B_0)_{i+1}^{j+1}$$
(C.33)

where Bo is the breadth of the off-channel storage

Differentiating equation C.19 with respect to Q_i^{j+1} and Q_{i+1}^{j+1} :

$$\frac{\partial C}{\partial Q_i} = -\theta$$
 (C.34)

$$\frac{\partial C}{\partial Q_{i+1}} = -\theta \tag{C.35}$$

Rewrite the momentum equation C.20 as:

$$\begin{split} M_{i} &= \frac{\Delta X}{2\Delta t_{i}} [Q_{i+1}^{j+1} + Q_{i}^{j+1} - Q_{i+1}^{j} - Q_{i}^{j}] + \\ & \left[\left(\frac{\beta Q^{2}}{A} \right)_{i+1}^{j+1} - \left(\frac{\beta Q^{2}}{A} \right)_{i}^{j+1} + g \frac{A_{i}^{j+1} + A_{i+1}^{j+1}}{2} \left[h_{i+1}^{j+1} - h_{i}^{j+1} + \frac{S_{f_{i}}^{j+1} + S_{f_{i+1}}^{j+1}}{2} \Delta x_{i} + \frac{S_{e_{i}}^{j+1} + S_{e_{i+1}}^{j+1}}{2} \Delta x_{i} \right] \right] \\ & \left[- \left(\overline{\beta q v_{x}} \right)_{i}^{j+1} \Delta x_{i} + \left(\overline{W_{t}} \frac{B_{f_{i}}^{j+1} + B_{f_{i+1}}^{j+1}}{2} \right)_{i}^{j+1} \Delta x_{i} \right] \\ & + (1 - \theta) \left\{ \left(\frac{\beta Q^{2}}{A} \right)_{i+1}^{j} - \left(\frac{\beta Q^{2}}{A} \right)_{i}^{j} + g \overline{A}_{i}^{j} \left[h_{i+1}^{j} - h_{i}^{j} + \overline{S_{f_{i}}} \Delta x_{i} + \overline{S_{e_{i}}} \Delta x_{i} \right] \right\} = 0 \end{split}$$

when the unknown averages at the timestep j+1 have been expanded.

The derivatives of the momentum equation with respect to h_i^{j+1} , h_{i+1}^{j+1} , Q_i^{j+1} , Q_{i+1}^{j+1} are:

$$\left[\left(\frac{\beta Q^{2}}{A^{2}}\frac{\partial A}{\partial h_{i}}\right)_{i}^{j+1} + g\frac{1}{2}\frac{\partial A_{i}^{j+1}}{\partial h_{i}}\left[h_{i+1}^{j+1} - h_{i}^{j+1} + \overline{S}_{f}^{j+1}\Delta x_{i} + \overline{S}_{e}^{j+1}\Delta x_{i}\right] + \frac{\partial M}{\partial h_{i}} = \theta \left\{g\overline{A}_{i}^{j+1}\left[-1 + \left(\frac{\partial S_{f}}{\partial h}\right)_{i}^{j+1}\Delta x_{i} + \left(\frac{\partial S_{e}}{\partial h}\right)_{i}^{j+1}\Delta x_{i}\right] + \frac{1}{2}\left(\overline{W_{f}}\frac{dB}{dh}\right)_{i}^{j+1}\Delta x_{i}$$

$$\left[\left(\frac{\beta Q^{2}B}{A^{2}}\right)_{i}^{j+1} + \frac{gB_{i}^{j+1}}{2}\left[h_{i+1}^{j+1} - h_{i}^{j+1} + \overline{S}_{f}^{j+1}\Delta x_{i} + \overline{S}_{e}^{j+1}\Delta x_{i}\right] + \frac{1}{2}\left(\overline{W_{f}}\frac{dB}{dh}\right)_{i}^{j+1}\Delta x_{i} + \left(\frac{\partial S_{e}}{\partial h}\right)_{i}^{j+1}\Delta x_{i}$$

$$\left(C.36\right)$$

after substituting B for $\frac{\partial A}{\partial h}$ and similarly:

$$\frac{\partial M}{\partial h_{i+1}} = \theta \begin{cases} \left(-\frac{\beta Q^2 B}{A^2} \right)_{i+1}^{j+1} + \frac{1}{2} g B_{i+1}^{j+1} \left[h_{i+1}^{j+1} - h_i^{j+1} + \overline{S}_t^{j+1} \Delta x_i + \overline{S}_e^{j+1} \Delta x_i \right] \\ + g \overline{A}_i^{j+1} \left[1 + \left(\frac{\partial S_t}{\partial h} \right)_{i+1}^{j+1} \Delta x_i + \left(\frac{\partial S_e}{\partial h} \right)_{i+1}^{j+1} \Delta x_i \right] \\ + \frac{1}{2} \left(\overline{W_t} \frac{dB}{dh} \right)_{i+1}^{j+1} \Delta x_i \end{cases}$$
(C.37)

$$\frac{\partial \mathbf{M}}{\partial \mathbf{Q}_{i}} = \frac{\Delta \mathbf{x}}{2\Delta t_{i}} + \theta \left\{ -2 \left(\frac{\beta \mathbf{Q}}{\mathbf{A}} \right)_{i}^{j+1} + g \overline{\mathbf{A}}_{i}^{j+1} \left[\left(\frac{\partial \mathbf{S}_{i}}{\partial \mathbf{Q}} \right)_{i}^{j+1} \Delta \mathbf{x}_{i} + \left(\frac{\partial \mathbf{S}_{o}}{\partial \mathbf{Q}} \right)_{i}^{j+1} \Delta \mathbf{x}_{i} \right] \right\}$$
(C.38)

$$\frac{\partial M}{\partial Q_{i+1}} = \frac{\Delta x_i}{2\Delta t_i} + \theta \left\{ 2 \left(\frac{\beta Q}{A} \right)_{i+1}^{j+1} + g \overline{A}_i^{j+1} \left[\left(\frac{\partial S_i}{\partial Q} \right)_{i+1}^{j+1} \Delta x_i + \left(\frac{\partial S_e}{\partial Q} \right)_{i+1}^{j+1} \Delta x_i \right] \right\}$$
(C.39)

The derivative for the friction loss is found by differentiating equation C.21

$$\overline{S}_{f_i} = \frac{|Q_i|Q_i}{\overline{K}^2} = \frac{|Q_i|Q_i n_i^2}{\overline{A}^2 \overline{R}^{\frac{4}{3}}} = \frac{|Q_i|Q_i n_i^2}{\overline{A}^2 (\overline{\overline{P}})^{\frac{4}{3}}} = \frac{|Q_i|Q_i n_i^2 \overline{P}^{\frac{4}{3}}}{\overline{A}^{\frac{10}{3}}}$$

$$\frac{\partial \overline{S}_f}{\partial h_i} = 2\overline{S}_f \left(\frac{1}{n_i} \frac{dn_i}{dh_i} - \frac{5B_i}{6\overline{A}} + \frac{1}{3\overline{P}_i} \frac{dP_i}{dh_i} \right)$$
(C.40)

$$\frac{\partial \overline{S}_{t}}{\partial h_{i+1}} = 2\overline{S}_{t_{i}} \left(\frac{1}{n_{i}} \frac{dn_{i}}{dh_{i+1}} - \frac{5B_{i+1}}{6\overline{A}_{i}} + \frac{1}{3\overline{P}_{i+1}} \frac{dP_{i+1}}{dh_{i+1}} \right)$$
(C.41)

$$\frac{\partial \overline{S}_{f}}{\partial Q_{i}} = \overline{S}_{fi} \left(\frac{1}{n_{i}} \frac{dn_{i}}{dQ_{i}} + \frac{1}{\overline{Q}_{i}} \right)$$
 (C.42)

$$\frac{\partial \overline{S}_{t}}{\partial Q_{i+1}} = \overline{S}_{ti} \left(\frac{1}{n_{i}} \frac{dn_{i}}{dQ_{i+1}} + \frac{1}{\overline{Q}_{i+1}} \right)$$
(C.43)

The derivatives of Se are found by differentiating equation C.23

$$\overline{S_{e_i}} = \frac{K_{e_i}}{2g\Delta x_i} \left[\left(\frac{Q}{A} \right)_{i+1}^2 - \left(\frac{Q}{A} \right)_{i}^2 \right]$$

$$\frac{\partial S_e}{\partial h_i} = -\frac{K_{e_i}}{2g\Delta x_i} \left[-2\left(\frac{Q}{A}\right)_i \left(\frac{Q}{A^2}\right) \frac{dA}{dh_i} \right]$$

$$= \left(\frac{K_e Q^2 B}{g\Delta x A^3}\right)_i$$
(C.44)

$$\frac{\partial S_e}{\partial h_{i+1}} = \left(-\frac{K_e Q^2 B}{g \Delta x A^3}\right)_{(4)} \tag{C.45}$$

$$\frac{\partial S_e}{\partial Q_i} = \frac{K_{ei}}{2g\Delta x_i} \left[-2\left(\frac{Q}{A}\frac{1}{A^2}\right)_i \right] = -\left(\frac{K_e Q}{g\Delta x A^2}\right)_i \tag{C.46}$$

$$\frac{\partial S_e}{\partial Q_{(+)}} = \left(\frac{K_e Q}{g \Delta x A^2}\right)_{(+)} \tag{C.47}$$

Finally the boundary conditions are considered. The partial derivatives are at the upstream boundary are derived as follows:

If the upstream boundary condition is a discharge hydrograph

$$\frac{\partial UB}{\partial h_1} = 0$$
 and $\frac{\partial UB}{\partial Q_1} = 1$ (C.48)

If the downstream boundary condition is discharge hydrograph

$$\frac{\partial DB}{\partial h_N} = 0$$
 and $\frac{\partial DB}{\partial Q_N} = 1$ (C.49)

If the downstream boundary condition is stage hydrograph

$$\frac{\partial DB}{\partial h_N} = \text{and } \frac{\partial DB}{\partial Q_N} = 0$$
 (C.50)

If the downstream boundary is a stage-discharge rating curve then

$$\frac{\partial DB}{\partial h_N} = \frac{Q_{k+1} - Q_k}{h_{k+1} - h_k}$$
 and $\frac{\partial DB}{\partial Q_N} = 1$ (C.51)

where k is the iteration number.

Once all the equations have been determined they are input to the matrices and the solution is found for the iteration within the timestep. Iterations are discontinued once convergence has been achieved within tolerance. The computation is then advanced to the next time step, which is decided using the Courant condition and if necessary adjusted by the adaptive time stepping routine (Section C.2)

C.3 SUMMARY

This chapter describes the solution of the St Venant equations of flow using an implicit finite difference scheme. Once the finite difference approximation has been set up the solution to the system of equations is found using the Newton-Raphson method.

The inclusion of real time data in the application of the model to the Orange River meant updating the computed values with observed values recorded at the ends of certain reaches. In order to do this specialised units describing modified boundary conditions were developed and are explained in Chapter 5.

Other related WRC reports available:

Capital cost optimisation of pumping and reservoir system design

B Barta · N Rowse

This report presents the reconcilliation of water supply optimisation techniques by means of computerisation to enable water supply authorities to keep up with new research developments and demands amongst their customers.

Two separate but related optimisation models can be used to enhance operating functions. These are:

1. Pumping rules phase report and software program

This computer program Reservoir System Pumping Optimisation (RSPO), allows historical demand data to be imported and analysed, a stochastic model of those data to be fitted, and optimum operation policies to be calculated.

2. Design parameters phase report and software program

The model determined and proposed in this report is able to assess rapidly various options for a water supply system with regard to service or distribution water storage and conveyance. The research culminated in the computer program Reservoir System Design Optimisation (RSDO).

Report Number: 757/2/98 ISBN: 1 86845 454 1

TO ORDER: Contact Rina or Judas - Telephone No: 012 330 0340

Fax Number: 012 331 2565

E-mail: publications@wrc.org.za

later Research Commission

Private Bag X03, Gezina, 0031, South Africa